




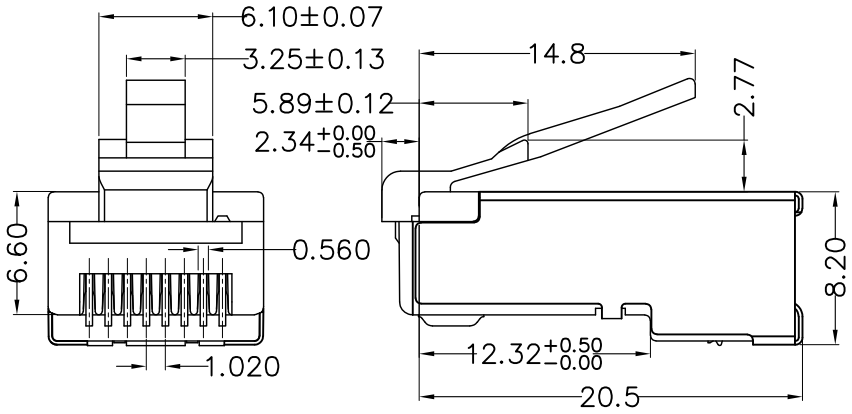

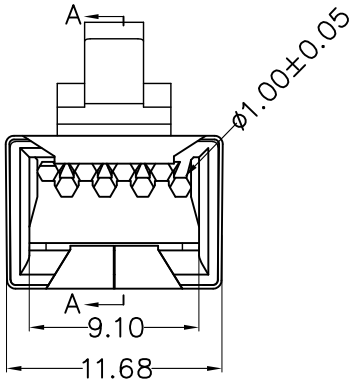

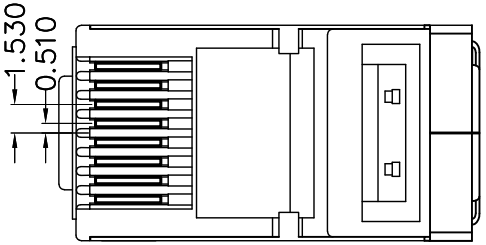

变更 CHANGE			
版本 EDITI	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE

NOTES:

1. Operation Temperature:-40℃～+85℃.
2. Electrial Characteristics:
   - 2.1>Rated Current:125V AC,1.5A@25℃.
   - 2.2>Contact Resistance:20mΩ Max.
   - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
   - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown.
3. Mechanical Characteristics:
   - 3.1>Insertion Force & Withdrawal Force:30N Max.
   - 3.2>Durability:750 cycles Min.
4. Environmental compliance:
   - 4.1>the products are compliant with the RoHS, and REACH etc.

Référence : 1010026

Désignation : Connecteur RJ45 Cat6 blindé spécial tous câbles - Lot de 10

编号 NO.	名称 NAME	数量 QTY	料号 PART NO.	品名规格 DESCRIPTION	材质 MATERIAL
1	Modular Plug	屏蔽壳 Shell 1PCS	43*20**09	方孔 Square hole Au: G/F" ☐ 1u" ☐ 3u" ☐ Ni:80u" ☐	黄铜 Brass ☑ 铁 Spcc ☐
		金片 Contacts 8PCS	/	2叉 2Prongs ☐ 3叉 3Prongs ☑ G/F" ☑ 1u" ☐ 3u" ☐ 6u" ☐ 15u" ☐ 30u" ☐ 50u" ☐ OTHER ☐	黄铜 Brass ☑ 磷铜 Phosphor copper ☐
		胶壳 Housing 1PCS		CAT6/FTP胶壳/长身/一件式/线孔1.00mm	94V-2 ☑ 94V-0 ☐

Neklan
Stay connected !

产品编号 PRODUCT NO		品名规格 DESCRIPTION						页次 SHEET.	1/1
材质 MATERIAL	/	单位 UNIT	mm	比例 SCALE	1:1	图号 DWG NO		版本 EDITI	A/0
尺寸公差表 DIMENSIONAL TOLERANCE: X.X ±0.2; X.XX ±0.10; X.XXX ±0.05; ANGLE ±2°		第三视角法 THIRD ANGLE PROJECTION				制图 DRAWN	XIEWENLI	日期 DATE	2020.10.17
						核对 CHECK		日期 DATE	
						批准 APPRO.		日期 DATE	