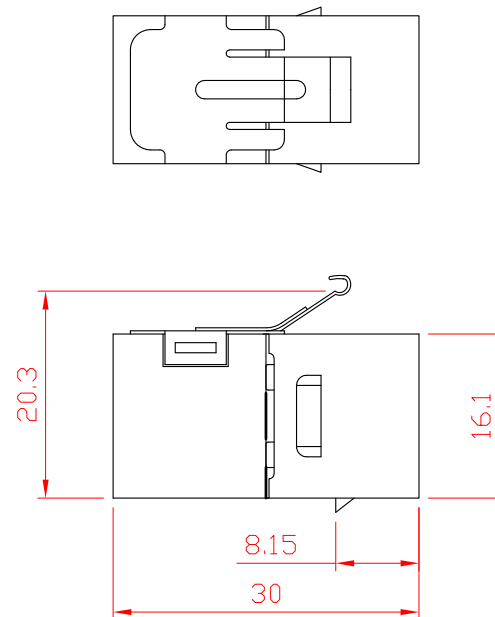
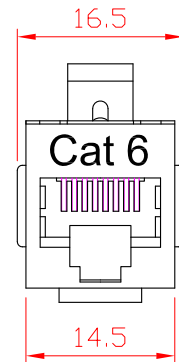


NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN


ENVIRONMENTAL:

1. STORAGE:-40° TO+85°
2. OPERATION:0° TO70°

MECHANICAL:

MECHANICAL:

1. HOUSING MATERIAL:ABS
2. INSERT MATERIAL:FAME RETARDANCY PBT
3. PCB MATERIAL:FR-4 T=1.6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE
STAMP PIN T=0.30mm
5. RJ45 JACK ;LIFE:750 TIMES MIN
6. SHIELD MATERIAL: STAINLESS STEEL,
T=0.2mm

					Neklan <i>Stay connected!</i>						
					Material					Item No.	1010239
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	DWG No.	
							A4	X:1	mm	Part Name	STP Cat.6 coupler, RJ45-RJ45
Drawn	Ding jian bo	2015.12.29	Tolerance							ERP	
Checked	Ge pei jun	2015.12.29	0.00-20.00								
			20.00-50.00								
Approved	Wang wei jun	2015.12.29	50.00-100.00								Part No.
			100.00-Angle								
					Sheet	1 OF 1	Version: A/0				