DÉCLARATION DE PERFORMANCE

DdP N° 3050497-001

Pour le production de fabrication : Câble de communication

1. Code d'identification unique du produit	**3050497** *** Conditionnement, longueur et couleur**
2. Numéro d'article, de lot ou de série ou tout autre élément permettant l'identification du produit de construction	**Similaire à l'étiquette produit**
3. Usages prévus	**Fourniture d'énergie, de contrôle ou de communications dans les bâtiments et autres ouvrages de génie civil dans le but de limiter la génération et la propagation du feu et de la fumée.**
4. Contact, adresse du fabricant	**NEKLAN** **12 rue des Cévennes** **91090 LISSES** **France** **Tel : +33134329600** **www.neklan.fr**
5. Contact, adresse d'un représentant légal	**idem point 4**
6. Système d'évaluation et de vérification de la constance des Performances du produit fabriqué tel qu'énoncé dans le CPR EU No. 305/2011 Annexe V	**Système 3**
7. Organisme notifié a effectué la détermination du type de produit, l'inspection initiale de l'usine de fabrication et du FPC, la surveillance continue et l'évaluation du FPC et les tests d'audit des échantillons prélevés avant la mise sur le marché du produit et a délivré le certificat de constance des performances	**1008**

8. Performances déclarées

Caractéristiques essentielles	Performance	Normes techniques harmonisées
Réaction au feu	Dca-s2,d2,a1	EN 50575:2014+A1:2016
Substance dangereuse	Aucune	

9. Les performances du produit identifié dans les points 1 et 2 sont conformes aux performances déclarées au point 8.
Cette déclaration de performance est établie sous la seule responsabilité du fabricant identifié au point 4.

Signé pour et au nom du fabricant par :

FOINET David, Directeur Général
(Nom et fonction)

Lisses, le 27/09/2023
(Lieu et date)



Compliance Statement

No. 2025-179

Screened Permanent Link, Class E_A

Company
HSD
12 Rue des Cévennes
91090 LISSES
France

Permanent Link Identification (3 connector model)

Horizontal cable:
HsD - Câble monobrin - Cat6a F/FTP - 4 paires bleu LSZH Dca - 500m
Part no.
3050490 (4 pairs)
3050497 (2x4 pairs)

RJ45 connector for telecommunications outlet, consolidation point, and patch panel:
HsD - Embase RJ45 Keystone Cat 6a FTP à sertissage rapide
Part no. 1010889

Consolidation point cord
HsD - PDC RJ45 FTP Cat.6A F/M câble C6a 1x4p Gris 5m
Part no. 215-7020-500-0050

Including use with patch panel (mounting fixture):
HsD - Panneau RJ45 24 ports pour connecteurs FTP&UTP +support arrière
Part no. 213-8701

Generic cabling standards - Class E_A Permanent Link requirements
- ISO/IEC 11801-1:2017 (Ed. 1.0) / ISO/IEC 11801-2:2017 (Ed. 1.0)
- EN 50173-1:2018 / EN 50173-2:2018
- TIA-568.2-D:2018

Technical report	**EC Cabling product ID**	**CS valid until**
12523370-01, DANAK-19/24896	7615	1 July 2026

This product has been tested by FORCE Technology and complies with the electrical requirements of the above specified standards and "Terms and conditions for the EC VERIFIED programme for Generic and Coaxial Cabling", DQP231006. The product takes part in a maintenance of certification schedule, which implies that FORCE Technology performs a sample test of the product once a year.

Hørsholm, 26 March 2025

Lars Lindskov Pedersen
Test Manager

Dennis Andersen
Head of Department

FORCE Technology
Venlighedsvej 4
2970 Hørsholm
Denmark
Tel. +45 43 25 14 00
lan.forcetechnology.com

TEST REPORT

Maintenance testing of generic cabling products: Screened permanent link, Class E_A, 3 connector model

Performed for HSD

Report no.: 12523370-01
DANAK-19/24896

Page 1 of 51
1 appendix

TEST Reg. no. 19


FORCE Technology
Venlighedsvej 4
2970 Hørsholm
Tel.+45 43 25 14 00

FORCE Technology Norway AS
Nye Vakås vei 32
1395 Hvalstad, Norway
+47 64 00 35 00
+47 64 00 35 01
info@forcetechnology.no

FORCE Technology Sweden AB
Tallmätargatan 7
72134 Västerås, Sweden
+46 (0)21-490 3000
+46 (0)21-490 3001
info@forcetechnology.se

FORCE Technology
Park Allé 345
2605 Brøndby, Denmark
+45 43 25 00 00
+45 43 25 00 10
info@forcetechnology.dk
www.forcetechnology.com

OVERVIEW

Title	Maintenance testing of generic cabling products
Product description	Screened permanent link, Class E_A, 3 connector model
Product identification	See clause 2
EC Cabling product ID	7615
Compliance statement	2025-179
Accreditation no.	DANAK-19/24896
Project no.	12523370-01
Original accreditation no.	DANAK-19/24197
Original project no.	12422706-01
Test object received	18 March 2025
Test period	March 2025
Client	HSD 12 Rue des Cévennes 91090 LISSES France
Contact	Sandrine LOPES TEIXEIRA
Specification	ISO/IEC 11801-1
Results	Compliance with specifications is verified
Prepared by	Lars Bjerring
Reviewed by	Nis Jepsen
Date	26 March 2025
Responsible	 Lars Lindskov Pedersen, Test Manager FORCE LAN Components and Systems Testing

Disclaimer

This report is issued under the rules of DANAK (Danish Accreditation) and ILAC (International Laboratory Accreditation Cooperation) including its MRA (Mutual Recognition Arrangement). Further information can be found at www.danak.dk and www.ilac.org.

The report must not be reproduced, except in full, without the written approval of FORCE Technology.

The test results only relate to the items tested.

The original version of the report is archived in FORCE Technology's database and is sent in electronic duplicate to the customer. The stored version of the report at FORCE Technology prevails as documentation for its contents and validity.

TABLE OF CONTENTS

1 Summary 5

2 Link Components 6

3 Conclusion 8

4 Test results 9

4.1 Cabling under test 9

4.2 Cable marking 9

4.3 High frequency transmission test results Link #1 (85 m horizontal cable) 10

4.4 High frequency transmission test results. Link #2 (15 m horizontal cable) 26

4.5 Resistance properties 42

5 Reference to applicable standards and documents 43

5.1 Generic cabling standards 43

5.2 Special requirements for EC VERIFIED 43

6 Test procedures 44

6.1 Electrical test 44

6.1.1 Attenuation 45

6.1.2 Return loss 46

6.1.3 Near end crosstalk (NEXT) 47

6.1.4 Powersum near end crosstalk (PSNEXT) 47

6.1.5 Attenuation to crosstalk loss ratio (ACR-N) 48

6.1.6 Power sum ACR (PSACR-N) 48

6.1.7 Attenuation to crosstalk ratio-far end (ACR-F) 48

6.1.8 Power sum attenuation to crosstalk ratio far end (PSACR-F) 48

6.1.9 Propagation delay 49

6.1.10 Delay skew 49

6.1.11 DC loop resistance 49

Appendix 1 Test software 51

1 Summary

A communication link has been tested for compliance with generic cabling standards.

The purpose of the testing was to maintain certification of the link according to the EC VERIFIED programme.

The link for this electrical performance test was assembled and delivered to FORCE by the client.

The link testing has been performed under laboratory conditions at the EC Cabling Group of FORCE.

This report firstly gives a detailed description of the links under test. Then the conclusion is given followed by the test results. At last, an overview of the test procedures and applied standards are given.

2 Link Components

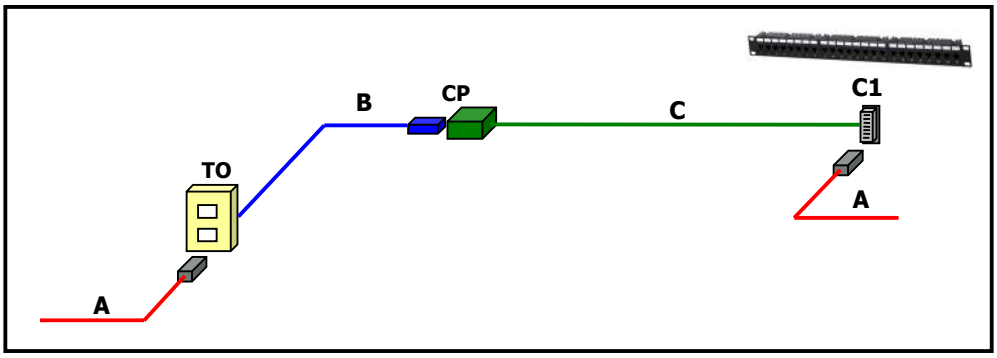


Figure 1. Definition of link (3 connector model).

The link consists of the following components:

Item	Name	Cable type	Length	Connecting hardware
A	Short test lead	Flexible cable	< 0,075 m	1 plug
B	Consolidation point cord	Solid cable	5 m	1 socket 1 plug
C	Horizontal cable	Horizontal cable	Link #1: 85 m Link #2: 15 m	2 sockets
TO	Telecommunications Outlet / Wall Outlet			
CP	Consolidation Point			
C1	Horizontal cross-connector / Floor Distributor / Patch panel			

Test samples

Horizontal cable:

HsD - Câble monobrin - Cat6a F/FTP - 4 paires bleu LSZH Dca - 500m

Part no.
3050490 (4 pairs)
3050497 (2x4 pairs)

RJ45 connector for telecommunications outlet, consolidation point, and patch panel:

HsD - Embase RJ45 Keystone Cat 6a FTP à sertissage rapide

Part no. 1010889

Consolidation point cord

HsD - PDC RJ45 FTP Cat.6A F/M câble C6a 1x4p Gris 5m

Part no. 215-7020-500-0050

Including use with patch panel (mounting fixture):

HsD - Panneau RJ45 24 ports pour connecteurs FTP&UTP +support arrière

Part no. 213-8701

3 Conclusion

The tested sample complies with the applied requirements.

The test results are only applicable for the tested sample.

4 Test results

4.1 Cabling under test



Figure 2. Photo of product under test

4.2 Cable marking

Table 1. Cable marking, horizontal cable

Characteristic	**Result**
Type of printing	Jet ink
Colour of text	Black text on a blue jacket
Text	HsD - High Speed Digital UC500 Categorie 6a F/FTP LSZH IEC 61156-5 ISO/IEC 11801 500 MHZ 100 Ω 23 AWG NVP 76% CPR Compliant Euro-Class Dca <<DOP-3050490-001>> 484M D25 230821 K135 0815

4.3 High frequency transmission test results Link #1 (85 m horizontal cable)

NEAR END CROSSTALK (NEXT). From terminal end

Link #1. Worst case margin: 4.3 dB at 296.7 MHz for Orange /Green pair.

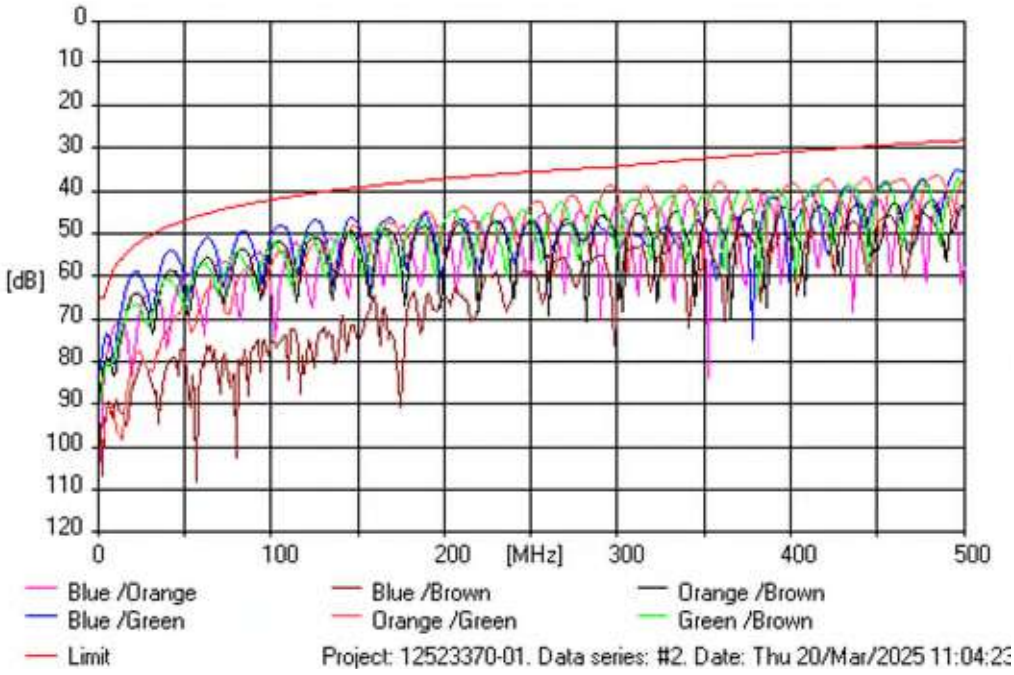


Table 2. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	81.6	65.0	16.6
4	3.5	74.9	65.0	9.9
16	16.0	62.4	54.6	7.8
100	99.6	50.8	41.9	8.9
250	250.5	42.8	35.3	7.5
500	500.0	35.8	27.9	7.9

PS NEAR END CROSSTALK (PSNEXT). From terminal end

Link #1. Worst case margin: 5.7 dB at 296.7 MHz for Orange pair.

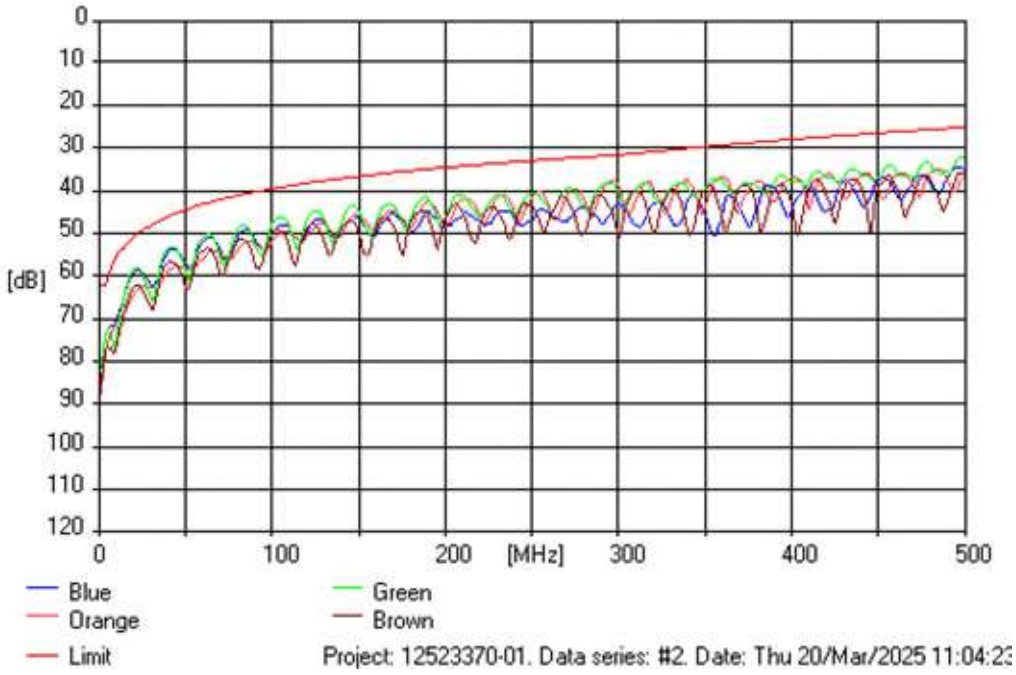


Table 3. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	80.9	62.0	18.9
4	3.5	74.1	62.0	12.1
16	16.0	61.5	52.2	9.3
100	99.6	48.1	39.3	8.7
250	250.5	40.5	32.7	7.8
500	500.0	32.2	24.8	7.4

RETURN LOSS. From terminal end

Link #1. Worst case margin: 7.4 dB at 12.2 MHz for Brown pair.

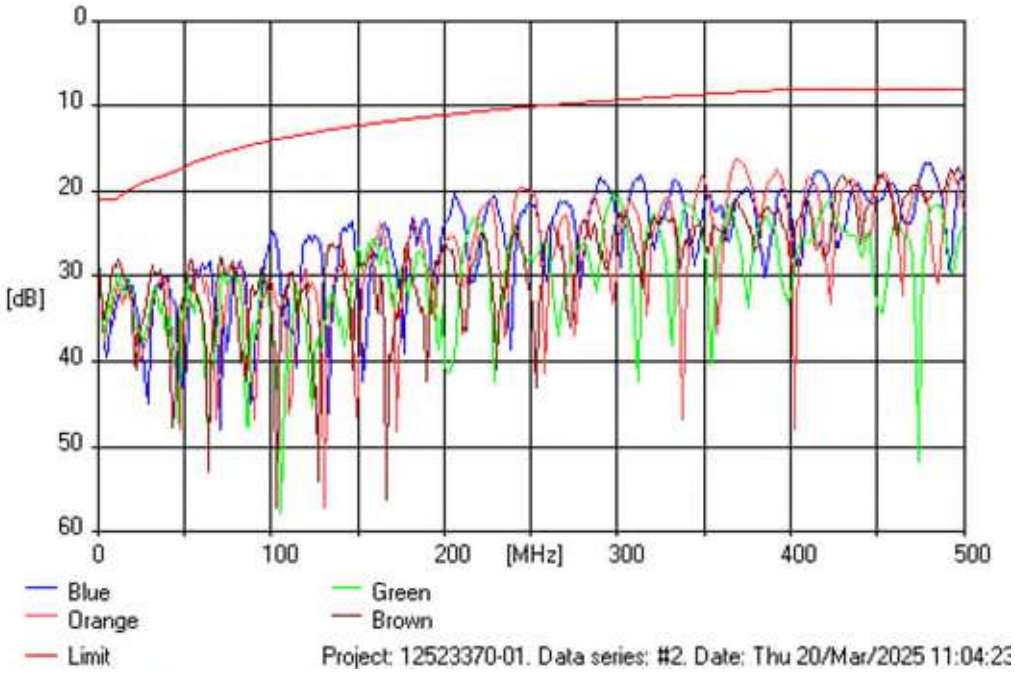


Table 4. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	29.1	21.0	8.0
4	3.5	35.1	21.0	14.1
16	16.0	30.3	20.0	10.3
100	99.6	25.6	14.0	11.5
250	250.5	20.4	10.0	10.4
500	500.0	17.9	8.0	9.9

ATTENUATION TO CROSSTALK RATIO, NEAR END (ACR-N). From terminal end Link #1. Worst case margin: 6.3 dB at 40.9 MHz for Blue/Green-Blue pair.

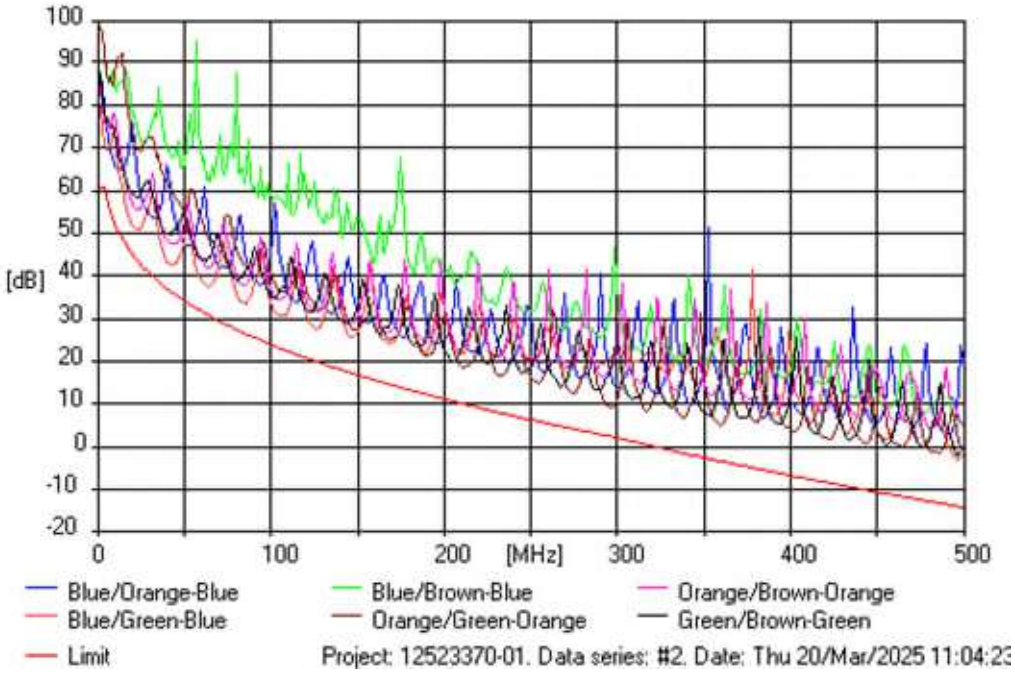


Table 5. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	79.9	61.0	18.9
4	3.5	71.8	61.0	10.8
16	16.0	56.0	47.6	8.4
100	99.6	34.1	24.1	10.0
250	250.5	16.0	6.4	9.6
500	500.0	-2.1	-14.2	12.1

PS ATT TO CROSSTALK RATIO, NEAR END (PSACR-N). From terminal end
Link #1. Worst case margin: 7.7 dB at 188.1 MHz for Green pair.

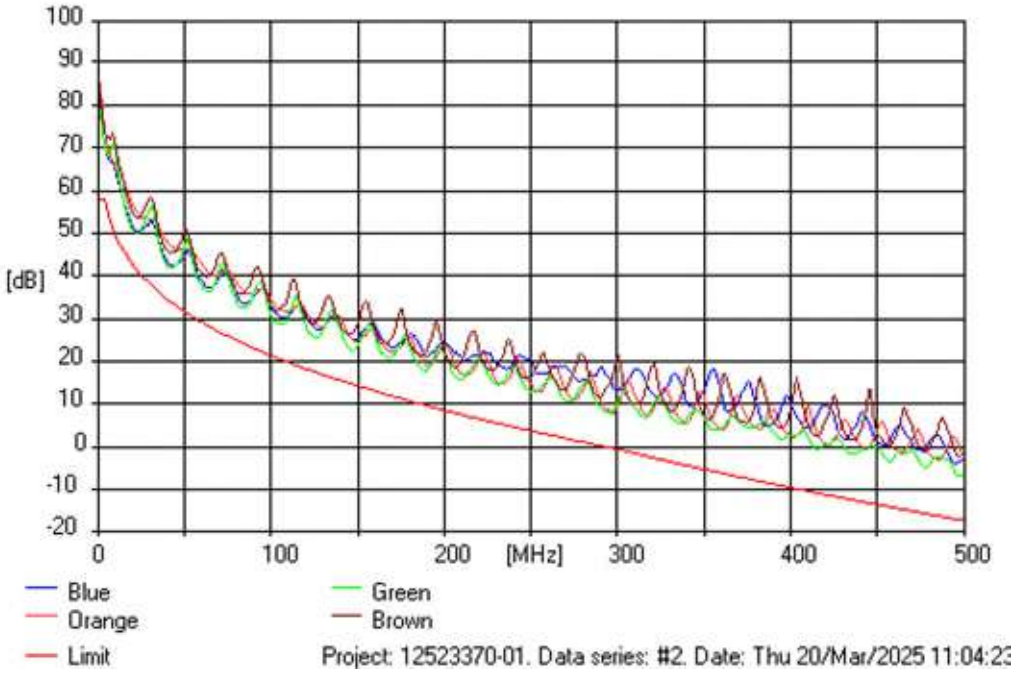


Table 6. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	79.2	58.0	21.2
4	3.5	71.0	58.0	13.0
16	16.0	55.1	45.3	9.9
100	99.6	31.4	21.6	9.8
250	250.5	13.2	3.7	9.4
500	500.0	-6.6	-17.2	10.6

NEAR END CROSSTALK (NEXT). From equipment end

Link #1. Worst case margin: 10 dB at 498.8 MHz for Blue /Green pair.

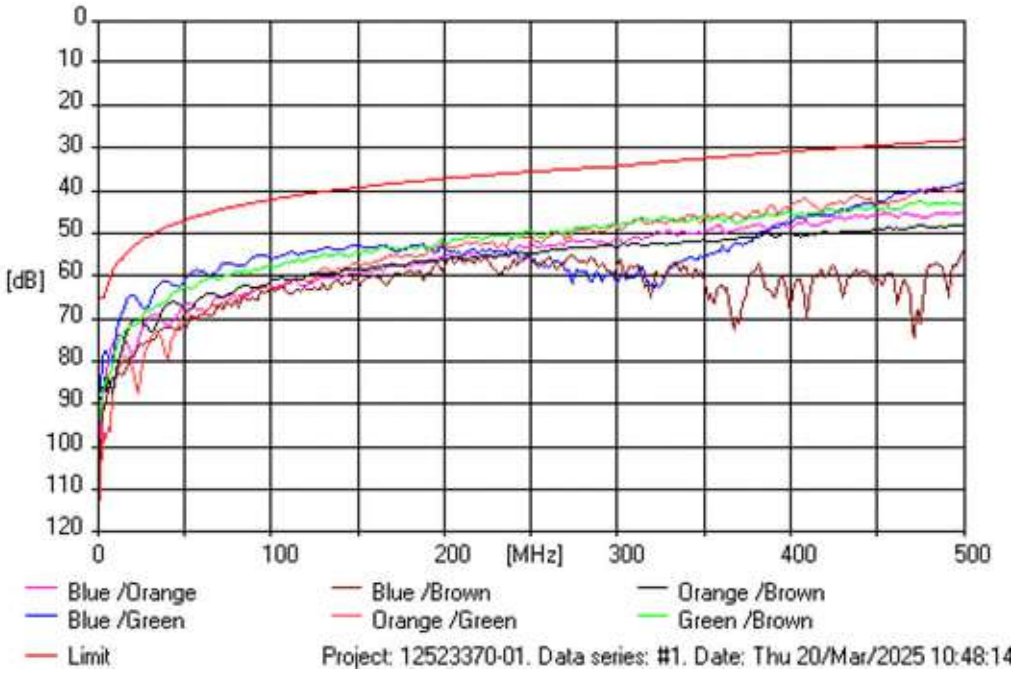


Table 7. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	86.8	65.0	21.8
4	3.5	77.8	65.0	12.8
16	16.0	65.8	54.6	11.2
100	99.6	55.9	41.9	14.1
250	250.5	49.4	35.3	14.1
500	500.0	38.1	27.9	10.2

PS NEAR END CROSSTALK (PSNEXT). From equipment end
Link #1. Worst case margin: 9.9 dB at 497.5 MHz for Green pair.

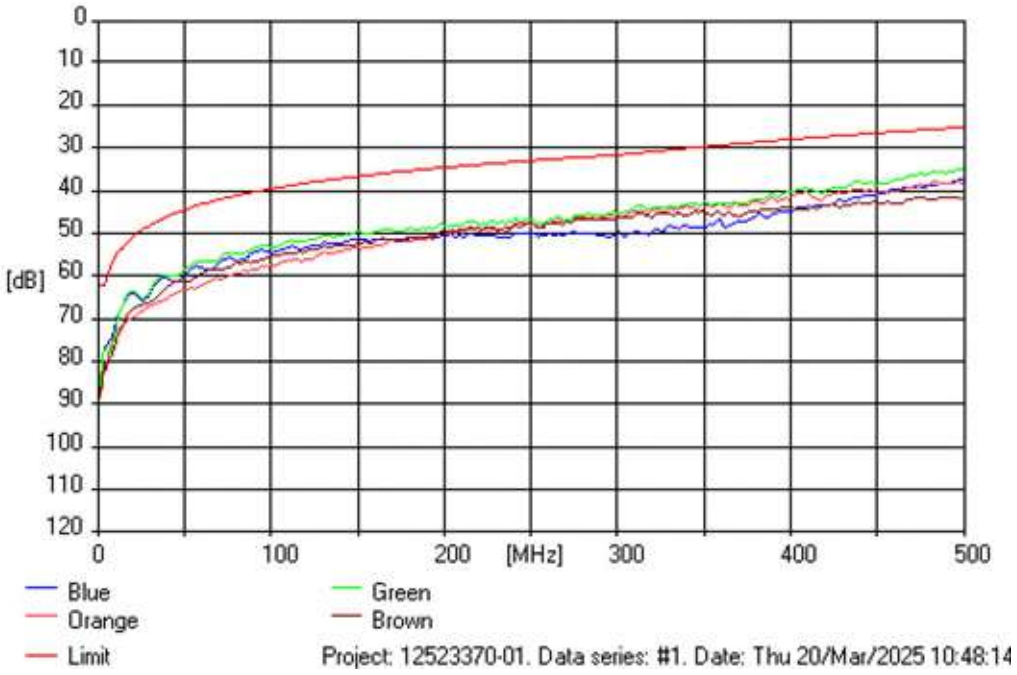


Table 8. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	85.9	62.0	23.9
4	3.5	76.8	62.0	14.8
16	16.0	64.7	52.2	12.5
100	99.6	53.1	39.3	13.8
250	250.5	46.5	32.7	13.8
500	500.0	35.0	24.8	10.1

RETURN LOSS. From equipment end

Link #1. Worst case margin: 7.5 dB at 1 MHz for Blue pair.

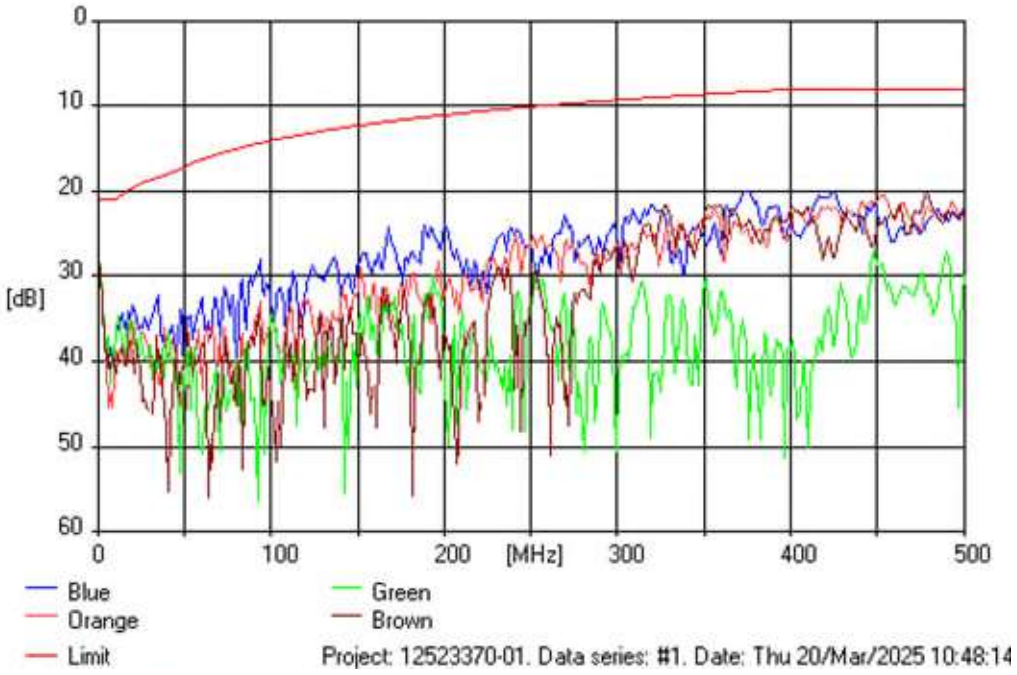


Table 9. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	28.5	21.0	7.5
4	3.5	36.0	21.0	15.0
16	16.0	36.3	20.0	16.3
100	99.6	32.1	14.0	18.1
250	250.5	25.1	10.0	15.1
500	500.0	21.8	8.0	13.8

ATTENUATION TO CROSSTALK RATIO, NEAR END (ACR-N). From equipment end
Link #1. Worst case margin: 11.3 dB at 17.2 MHz for Blue/Green-Blue pair.

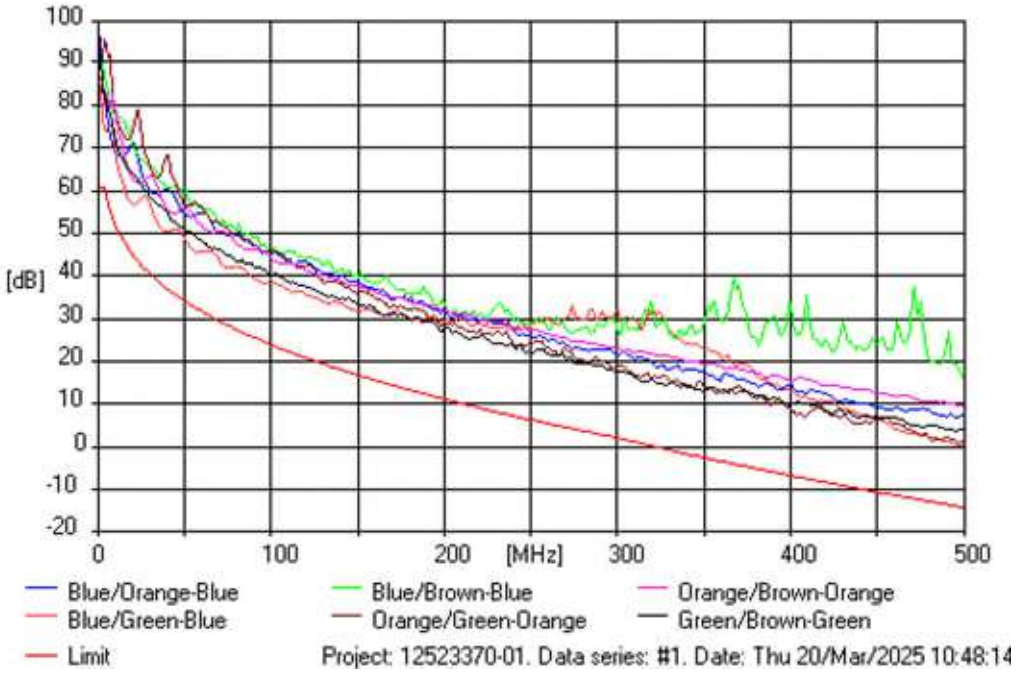


Table 10. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	85.1	61.0	24.1
4	3.5	74.7	61.0	13.7
16	16.0	59.4	47.6	11.7
100	99.6	39.2	24.1	15.1
250	250.5	22.1	6.4	15.7
500	500.0	0.2	-14.2	14.4

PS ATT TO CROSSTALK RATIO, NEAR END (PSACR-N). From equipment end
Link #1. Worst case margin: 12.8 dB at 17.2 MHz for Green pair.

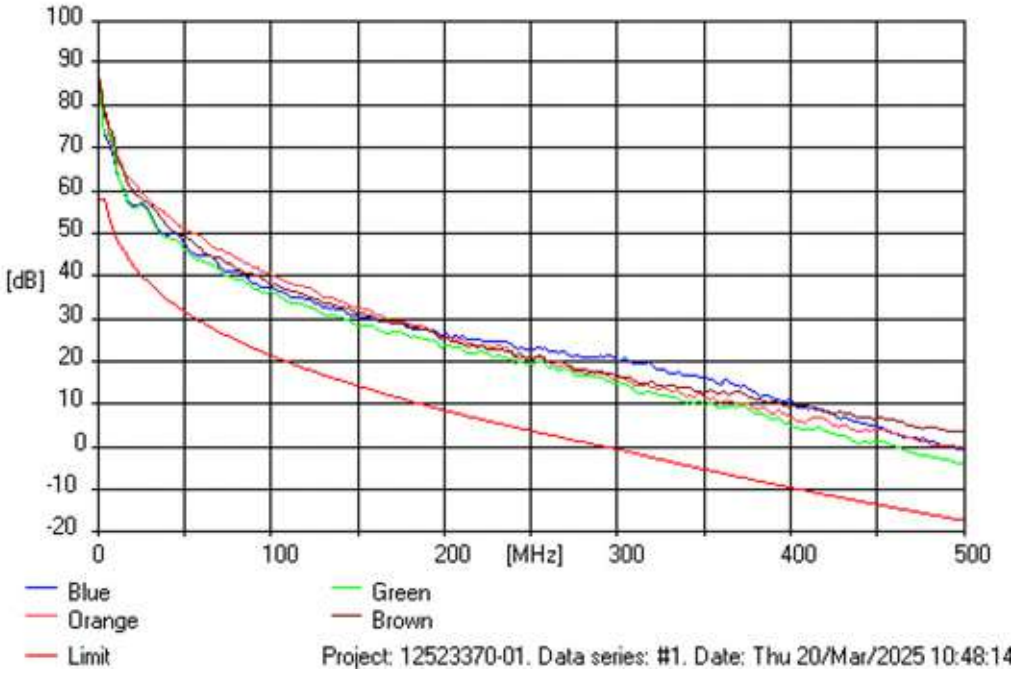


Table 11. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	84.2	58.0	26.2
4	3.5	73.7	58.0	15.7
16	16.0	58.3	45.3	13.0
100	99.6	36.4	21.6	14.8
250	250.5	19.2	3.7	15.5
500	500.0	-3.9	-17.2	13.4

BALANCED MODE ATTENUATION.

Link #1. Worst case margin: 0.3 dB at 6 MHz for Orange pair.


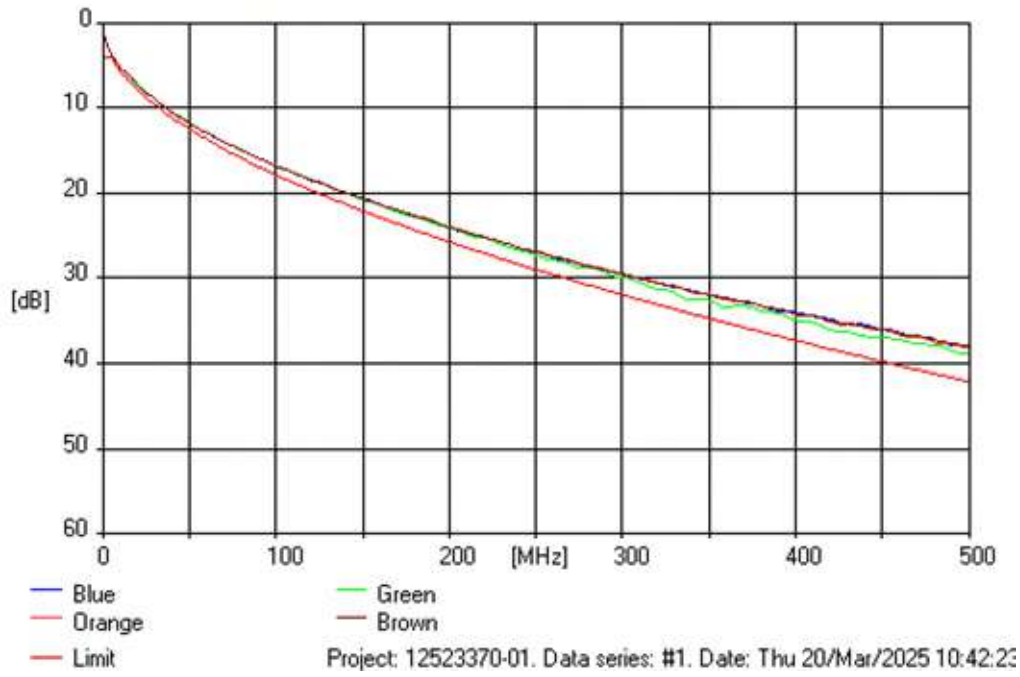


Table 12. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	1.8	4.0	2.2
4	3.5	3.1	4.0	0.9
16	16.0	6.4	7.0	0.5
100	99.6	16.7	17.8	1.0
250	250.5	27.3	28.9	1.6
500	500.0	38.8	42.1	3.2


ATTENUATION TO CROSSTALK RATIO - FAR (ACR-F).

Link #1. Worst case margin: 12.4 dB at 1 MHz for Blue/Orange-Blue pair.

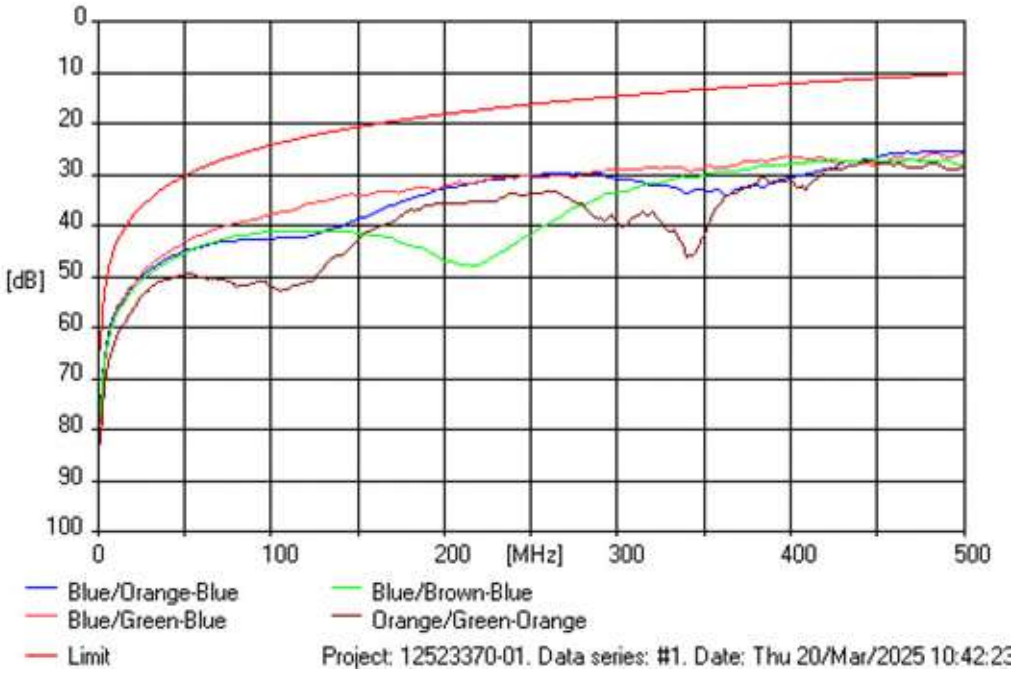

ATTENUATION TO CROSSTALK RATIO - FAR (ACR-F).

Link #1. Worst case margin: 11 dB at 1 MHz for Orange/Blue-Orange pair.

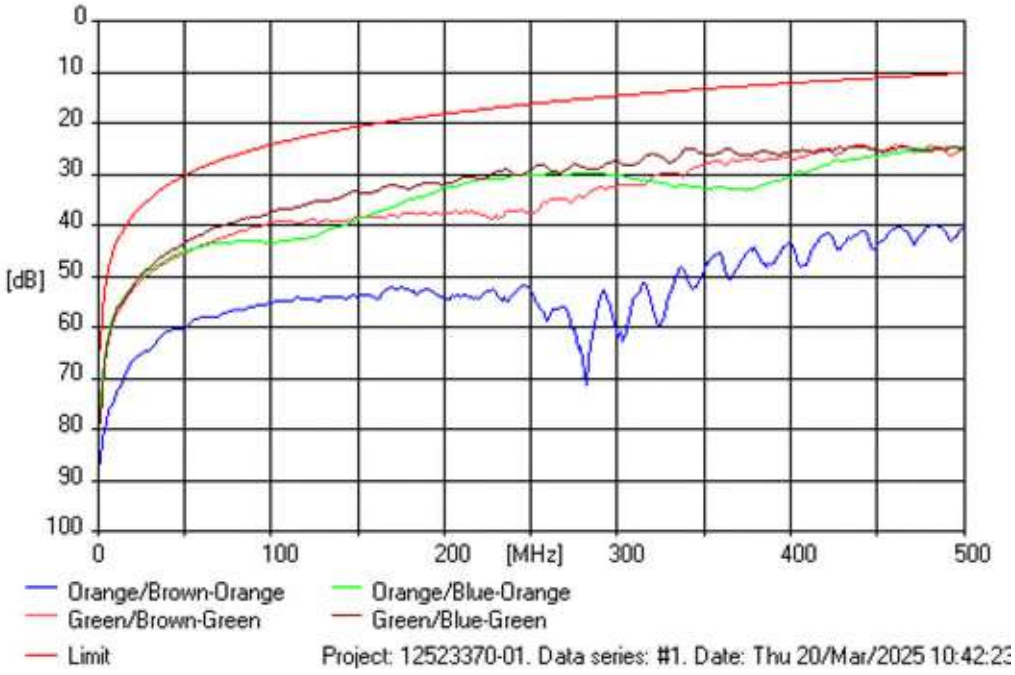

ATTENUATION TO CROSSTALK RATIO - FAR (ACR-F).

Link #1. Worst case margin: 13.4 dB at 1 MHz for Brown/Blue-Brown pair.

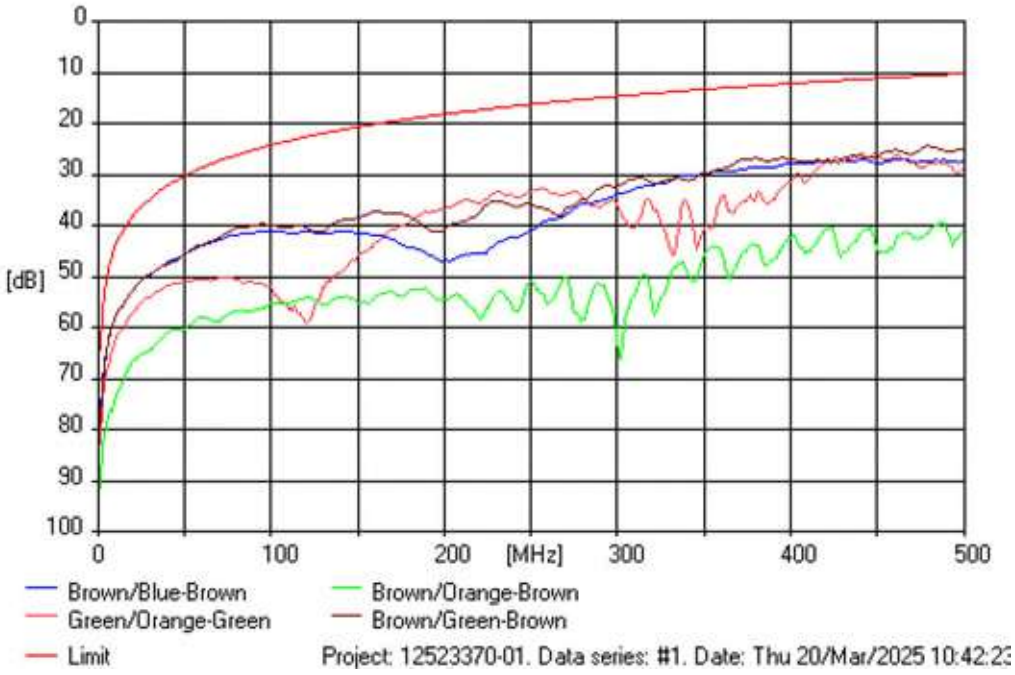


Table 13. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	75.2	64.2	11.0
4	3.5	66.2	53.3	12.9
16	16.0	53.5	40.1	13.3
100	99.6	37.5	24.2	13.3
250	250.5	28.9	16.2	12.7
500	500.0	24.6	10.2	14.3

PS ATTENUATION TO CROSSTALK RATIO - FAR (PSACR-F).

Link #1. Worst case margin: 11.2 dB at 1 MHz for Blue pair.

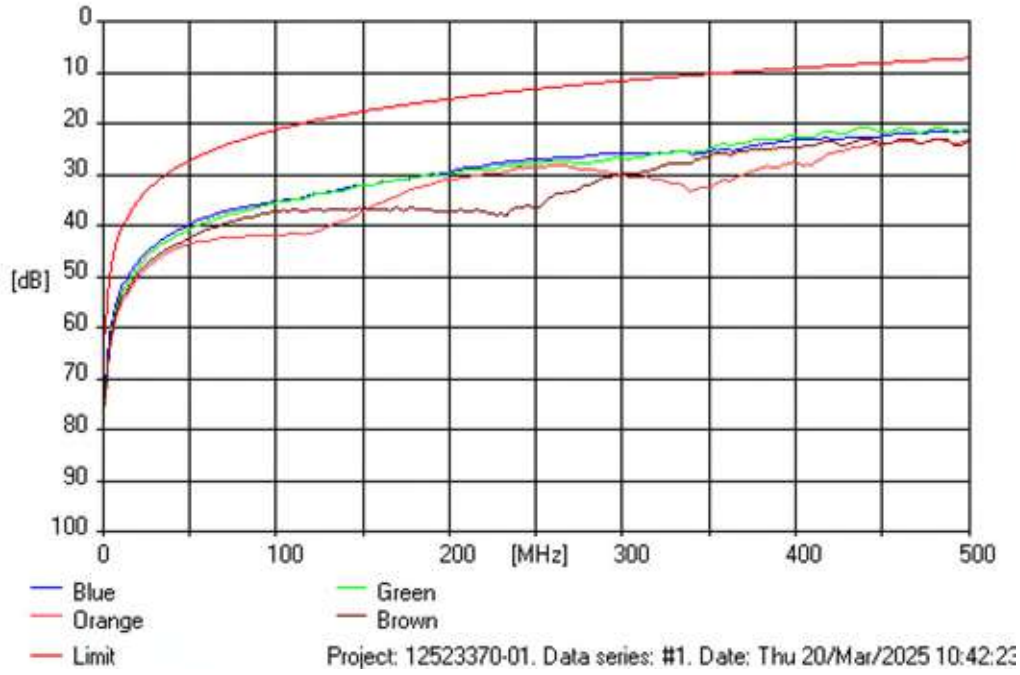


Table 14. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	72.4	61.2	11.2
4	3.5	62.1	50.3	11.7
16	16.0	49.1	37.1	12.0
100	99.6	35.2	21.2	14.0
250	250.5	27.2	13.2	13.9
500	500.0	20.9	7.2	13.7

PROPAGATION DELAY.

Link #1. Worst case margin: 0.087 µs at 497.5 MHz for Orange pair.

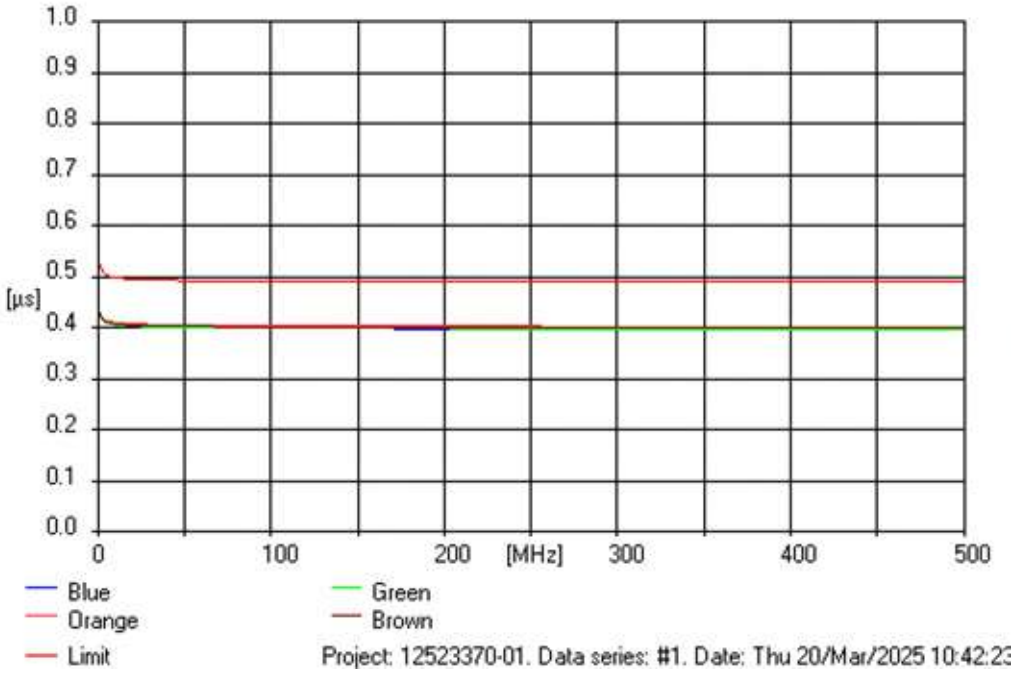


Table 15. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [ns]	Limit value [ns]	Calc. margin [ns]
1	1.0	430	520	90
4	3.5	416	505	89
16	16.0	409	496	88
100	99.6	404	491	87
250	250.5	403	490	87
500	500.0	402	490	87

DELAY SKEW.

Link #1. Worst case margin: 39.9 ns.

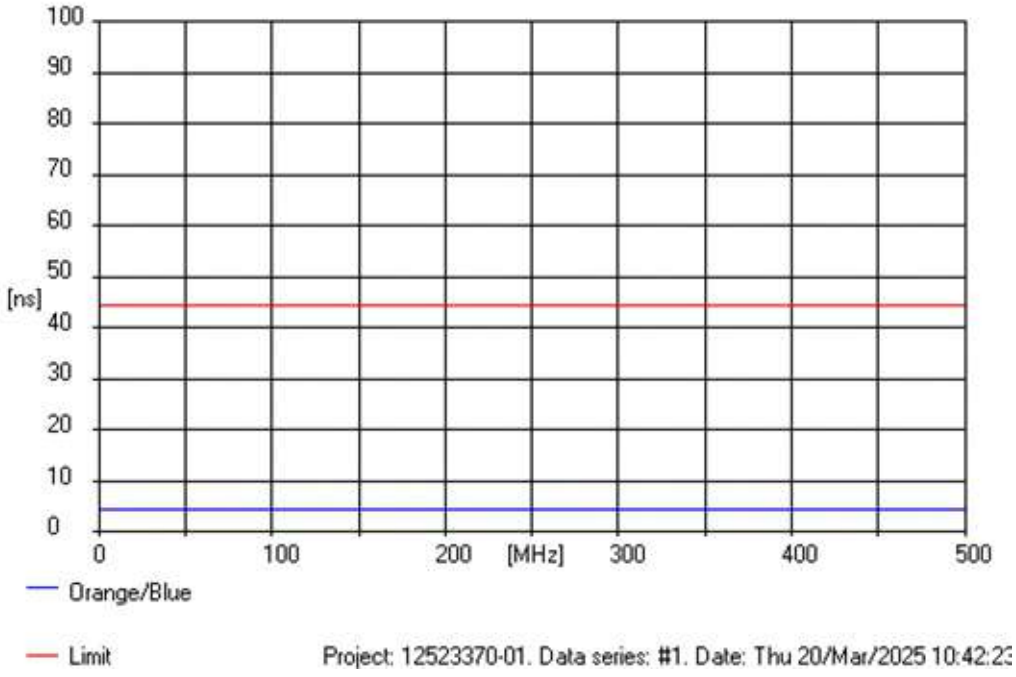


Table 16. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [ns]	Limit value [ns]	Calc. margin [ns]
1	1.0	4.4	44.3	39.9
4	3.5	4.3	44.3	39.9
16	16.0	4.4	44.3	39.9
100	99.6	4.4	44.3	39.9
250	250.5	4.4	44.3	39.9
500	500.0	4.3	44.3	39.9

Equipment:

Network Analyser, Agilent E5071C, 4-port	Instrument no.: 31187
Switch, Agilent, type 87050A	Instrument no.: 80139
Balun, BH, type 040-0192	Instrument no.: 31301 to 31304
Balun, BH, type 040-0192	Instrument no.: 31305 to 31308

4.4 High frequency transmission test results. Link #2 (15 m horizontal cable)

NEAR END CROSSTALK (NEXT). From terminal end

Link #2. Worst case margin: 3.9 dB at 296.7 MHz for Orange /Green pair.

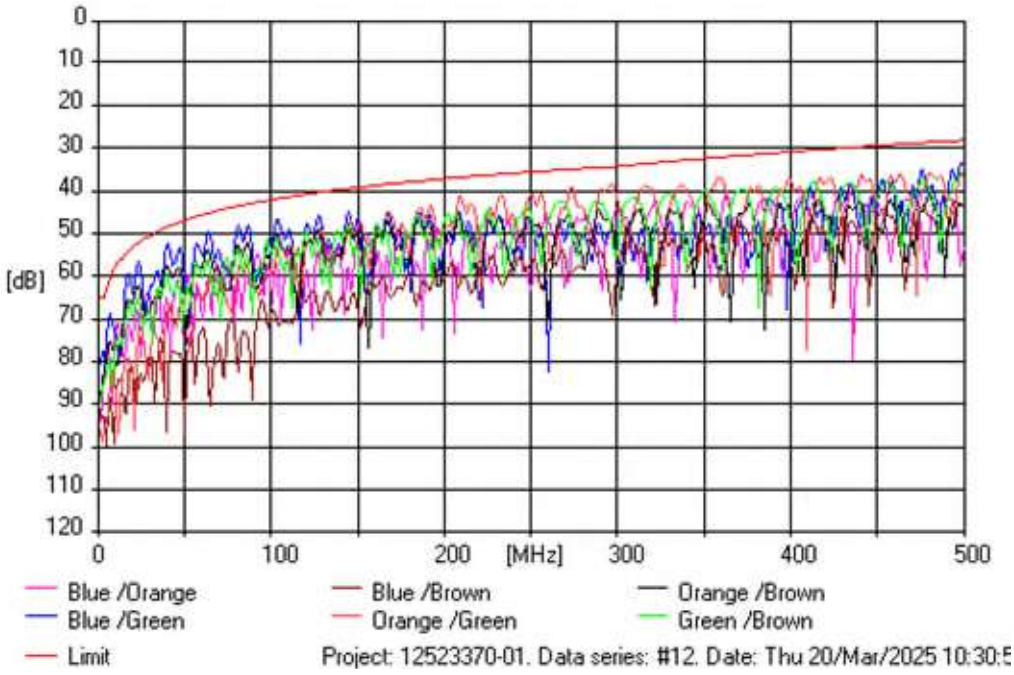


Table 17. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	80.2	65.0	15.2
4	3.5	79.8	65.0	14.8
16	16.0	60.7	54.6	6.1
100	99.6	52.5	41.9	10.6
250	250.5	40.5	35.3	5.1
500	500.0	34.0	27.9	6.1

PS NEAR END CROSSTALK (PSNEXT). From terminal end
Link #2. Worst case margin: 4.9 dB at 208.1 MHz for Green pair.

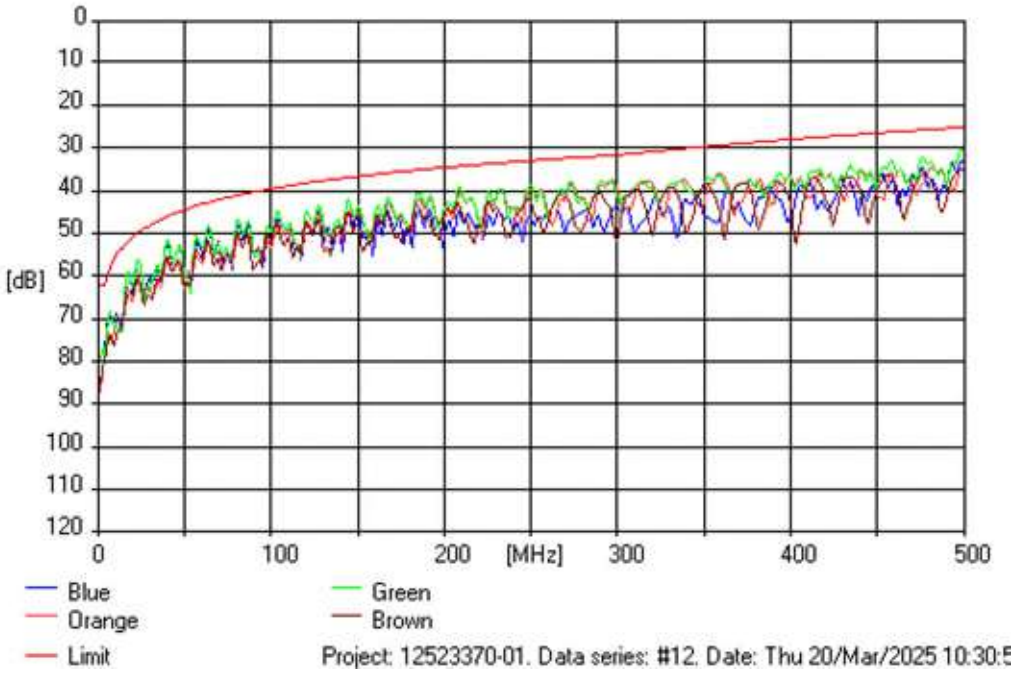


Table 18. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	79.6	62.0	17.6
4	3.5	77.4	62.0	15.4
16	16.0	60.0	52.2	7.7
100	99.6	49.5	39.3	10.2
250	250.5	39.1	32.7	6.4
500	500.0	30.6	24.8	5.8

RETURN LOSS. From terminal end

Link #2. Worst case margin: 3.2 dB at 2.2 MHz for Green pair.

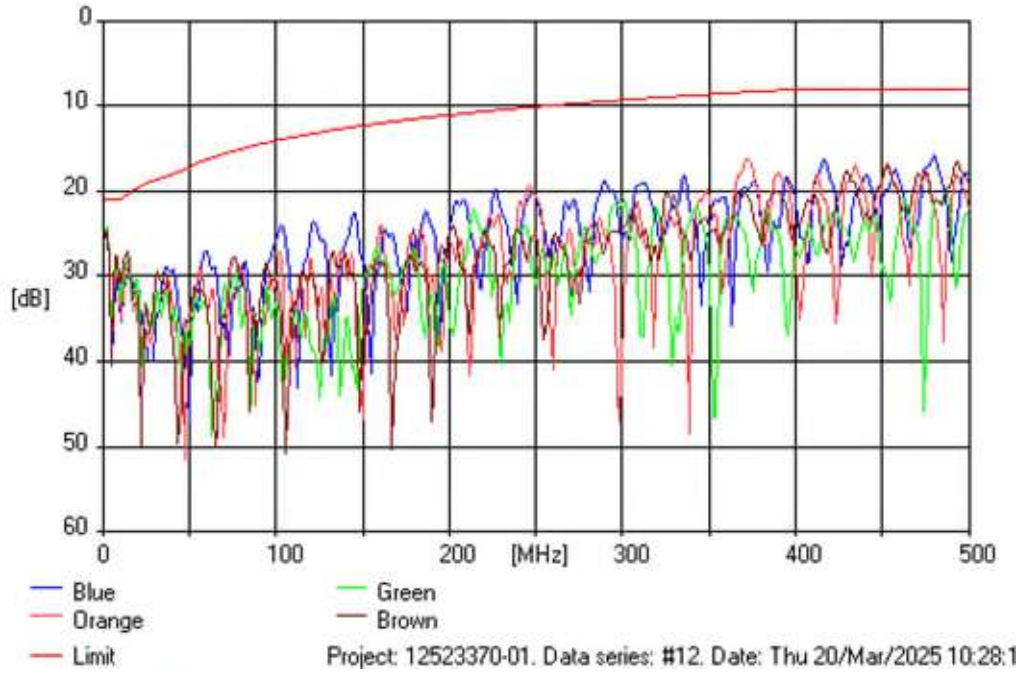


Table 19. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	24.6	21.0	3.6
4	3.5	27.8	21.0	6.8
16	16.0	31.1	20.0	11.1
100	99.6	25.9	14.0	11.9
250	250.5	21.0	10.0	11.0
500	500.0	18.1	8.0	10.1

ATTENUATION TO CROSSTALK RATIO, NEAR END (ACR-N). From terminal end Link #2. Worst case margin: 5.1 dB at 63.4 MHz for Blue/Green-Blue pair.

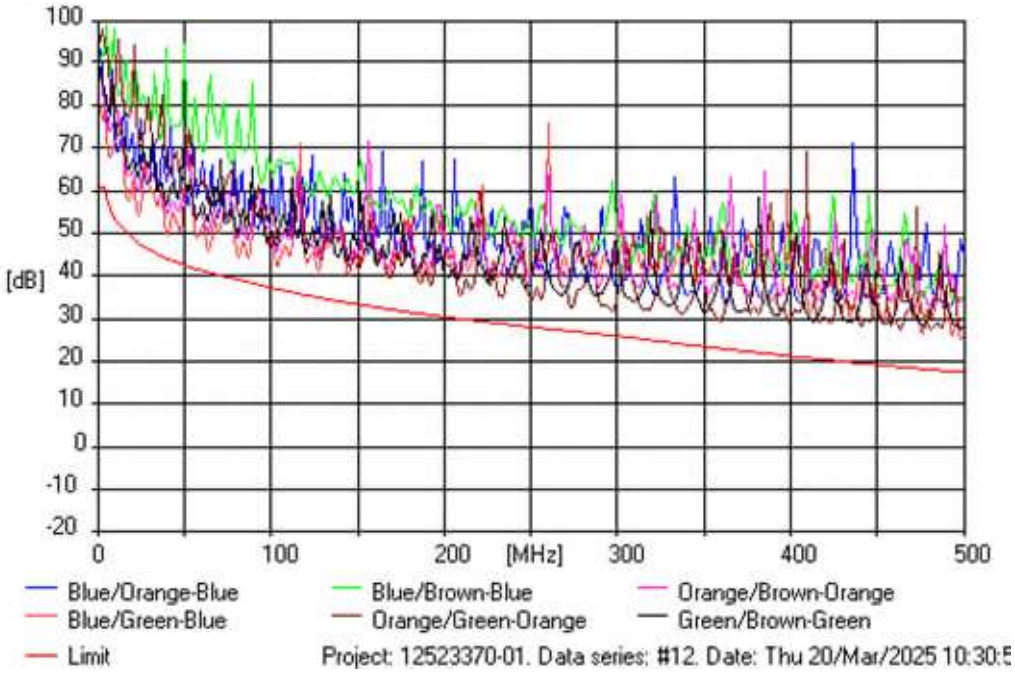


Table 20. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	79.7	61.0	18.7
4	3.5	79.1	61.0	18.1
16	16.0	59.3	50.6	8.7
100	99.6	48.8	37.5	11.4
250	250.5	34.5	28.2	6.3
500	500.0	25.8	17.5	8.3

PS ATT TO CROSSTALK RATIO, NEAR END (PSACR-N). From terminal end Link #2. Worst case margin: 5.8 dB at 209.3 MHz for Green pair.

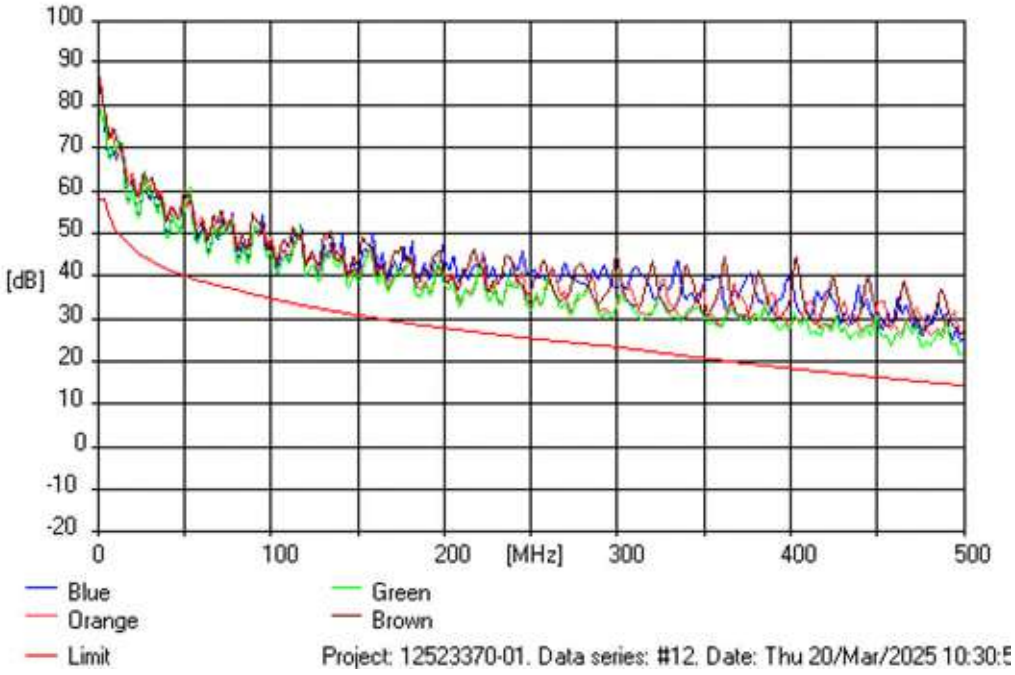


Table 21. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	79.2	58.0	21.2
4	3.5	76.7	58.0	18.7
16	16.0	58.5	48.2	10.3
100	99.6	45.9	34.9	10.9
250	250.5	32.7	25.5	7.2
500	500.0	22.0	14.4	7.6

NEAR END CROSSTALK (NEXT). From equipment end

Link #2. Worst case margin: 4.5 dB at 63.4 MHz for Blue /Green pair.

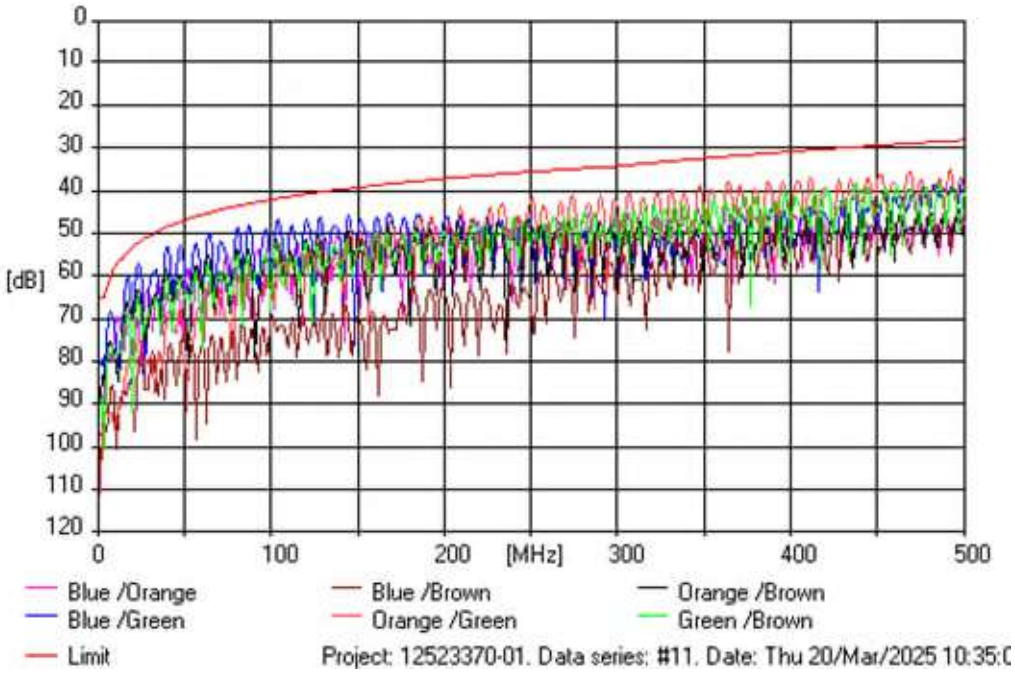


Table 22. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	80.5	65.0	15.5
4	3.5	82.3	65.0	17.3
16	16.0	61.0	54.6	6.4
100	99.6	55.2	41.9	13.3
250	250.5	41.5	35.3	6.2
500	500.0	37.2	27.9	9.3

PS NEAR END CROSSTALK (PSNEXT). From equipment end Link #2. Worst case margin: 6.1 dB at 63.4 MHz for Green pair.

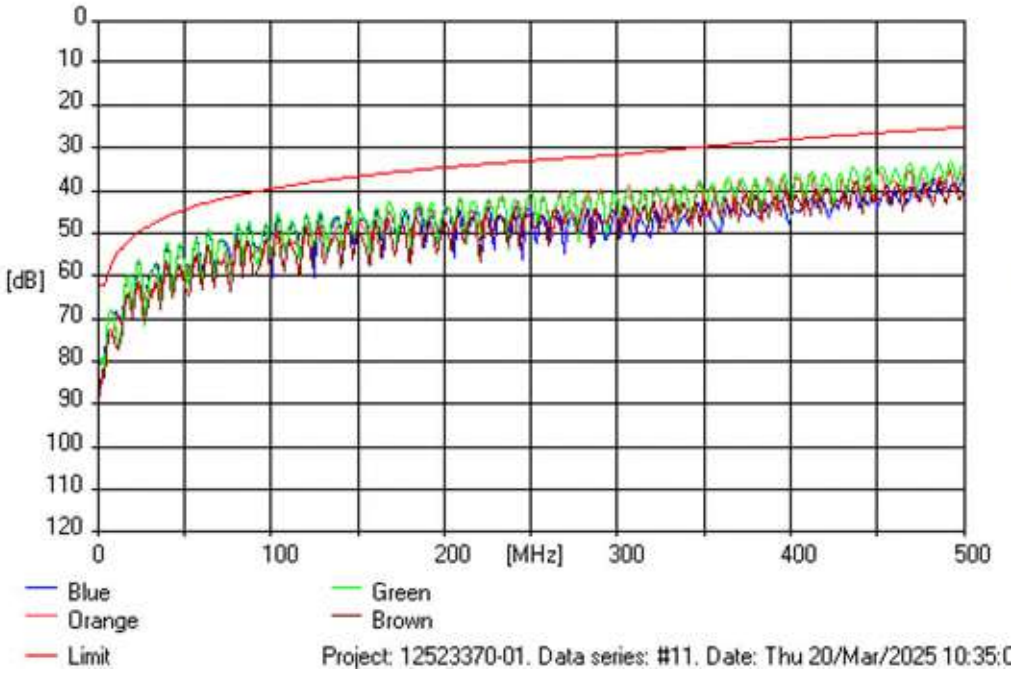


Table 23. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	80.0	62.0	18.0
4	3.5	79.5	62.0	17.5
16	16.0	60.4	52.2	8.1
100	99.6	52.5	39.3	13.1
250	250.5	40.3	32.7	7.6
500	500.0	33.3	24.8	8.4

RETURN LOSS. From equipment end

Link #2. Worst case margin: 2.3 dB at 2.2 MHz for Brown pair.

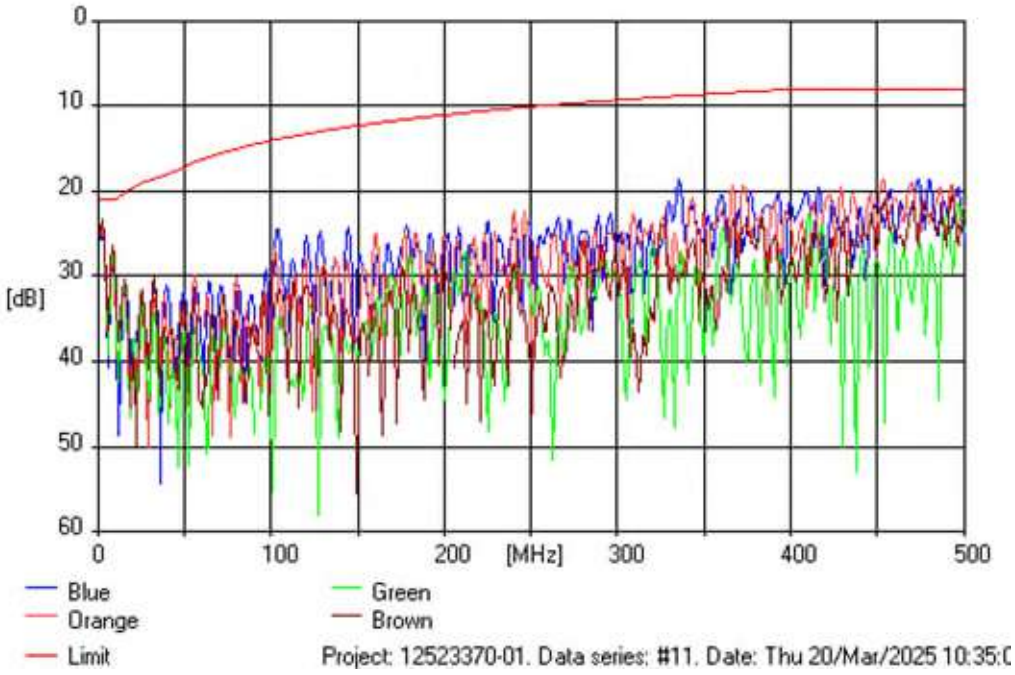


Table 24. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	24.6	21.0	3.6
4	3.5	25.3	21.0	4.3
16	16.0	31.1	20.0	11.1
100	99.6	37.6	14.0	23.5
250	250.5	27.6	10.0	17.5
500	500.0	21.7	8.0	13.7

ATTENUATION TO CROSSTALK RATIO, NEAR END (ACR-N). From equipment end Link #2. Worst case margin: 5.6 dB at 63.4 MHz for Blue/Green-Blue pair.

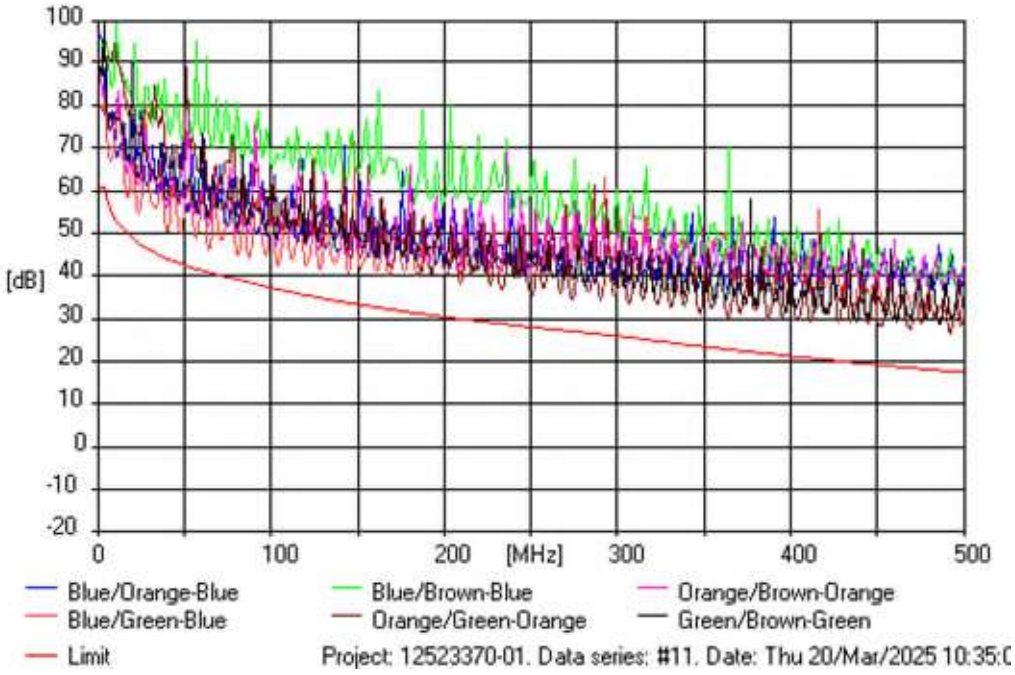


Table 25. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	80.1	61.0	19.1
4	3.5	81.7	61.0	20.7
16	16.0	59.6	50.6	9.0
100	99.6	51.5	37.5	14.1
250	250.5	35.5	28.2	7.3
500	500.0	29.0	17.5	11.5

PS ATT TO CROSSTALK RATIO, NEAR END (PSACR-N). From equipment end
Link #2. Worst case margin: 6.9 dB at 104.5 MHz for Green pair.

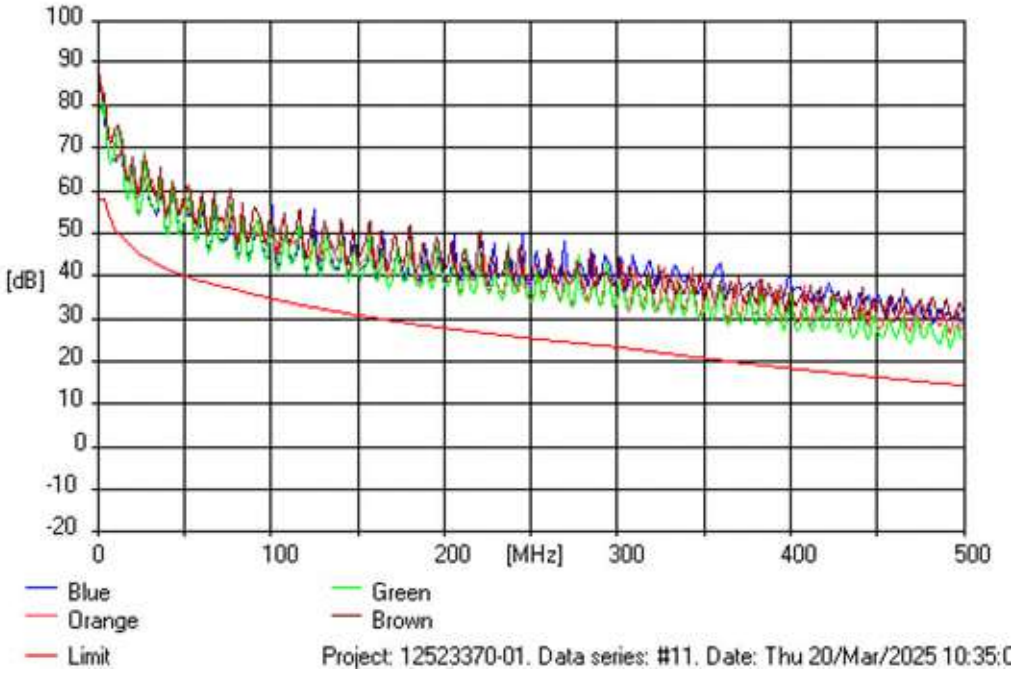


Table 26. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	79.6	58.0	21.6
4	3.5	78.8	58.0	20.8
16	16.0	58.9	48.2	10.7
100	99.6	48.8	34.9	13.9
250	250.5	34.1	25.5	8.5
500	500.0	24.6	14.4	10.2

BALANCED MODE ATTENUATION.

Link #2. Worst case margin: 0.3 dB at 359 MHz for Green pair.


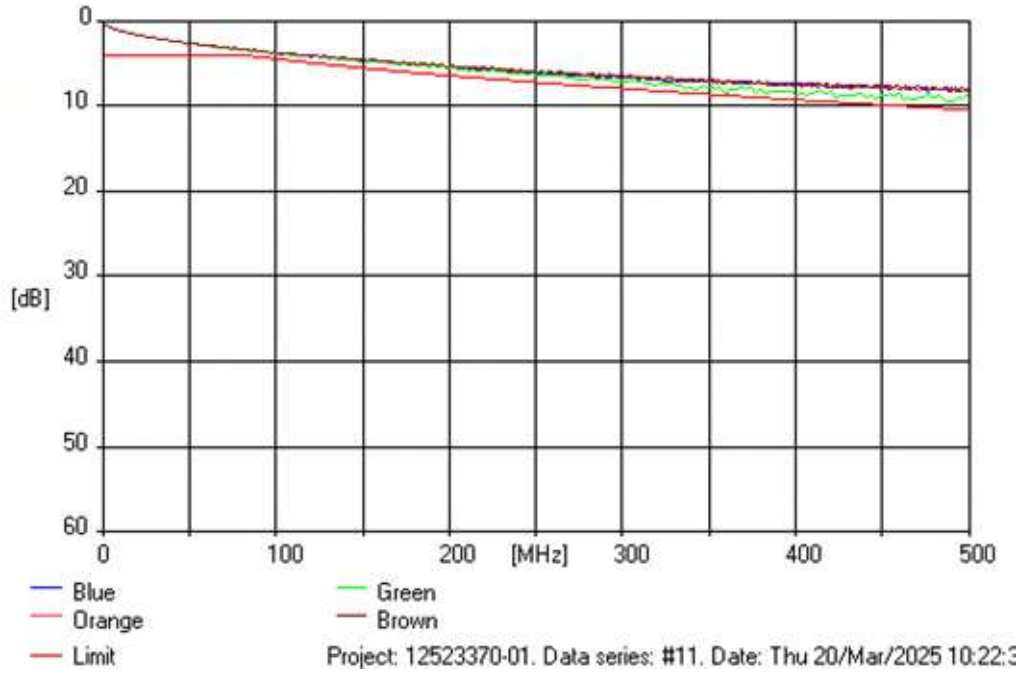


Table 27. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	0.4	4.0	3.6
4	3.5	0.7	4.0	3.3
16	16.0	1.4	4.0	2.6
100	99.6	3.7	4.4	0.7
250	250.5	6.3	7.2	0.8
500	500.0	8.6	10.4	1.8


ATTENUATION TO CROSSTALK RATIO - FAR (ACR-F).

Link #2. Worst case margin: 12.2 dB at 4.7 MHz for Blue/Orange-Blue pair.

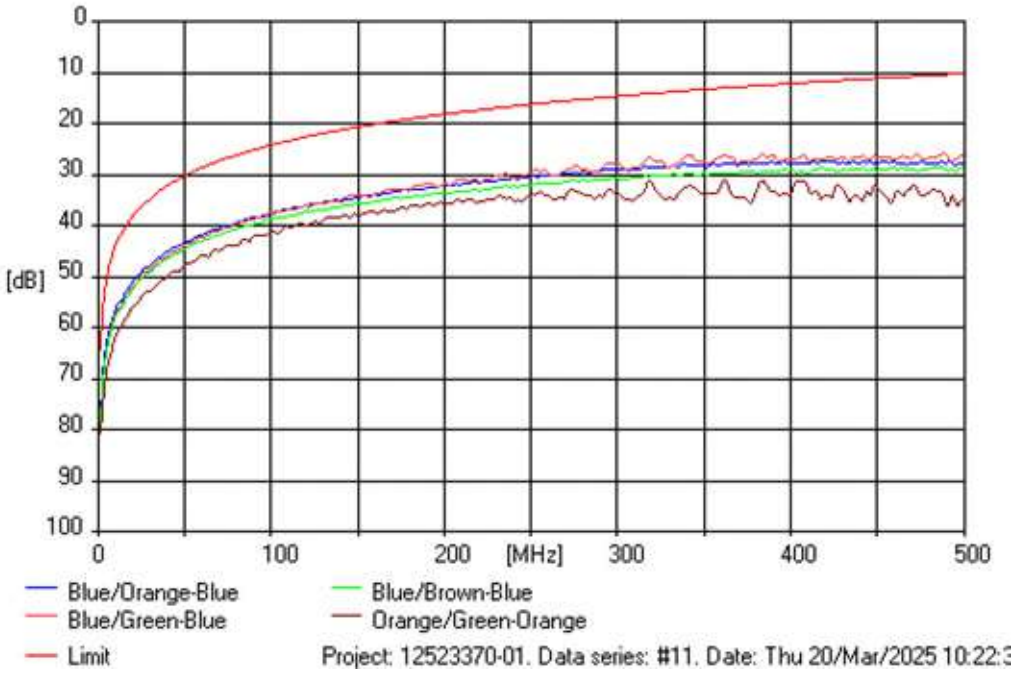

ATTENUATION TO CROSSTALK RATIO - FAR (ACR-F).

Link #2. Worst case margin: 12.3 dB at 4.7 MHz for Orange/Blue-Orange pair.

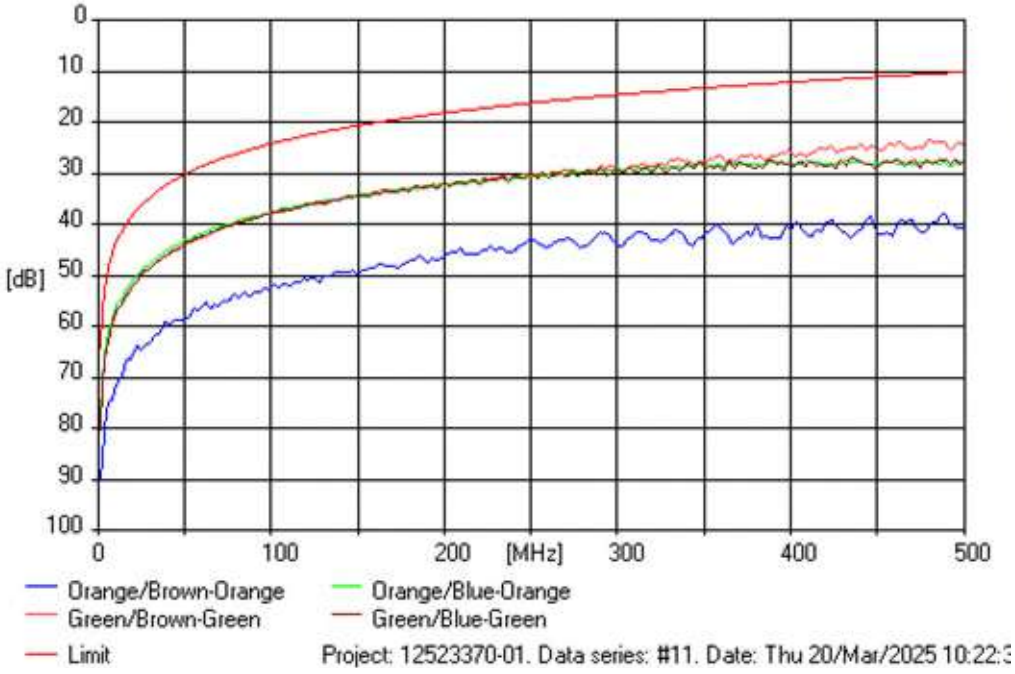

ATTENUATION TO CROSSTALK RATIO - FAR (ACR-F).

Link #2. Worst case margin: 13.4 dB at 3.5 MHz for Brown/Green-Brown pair.

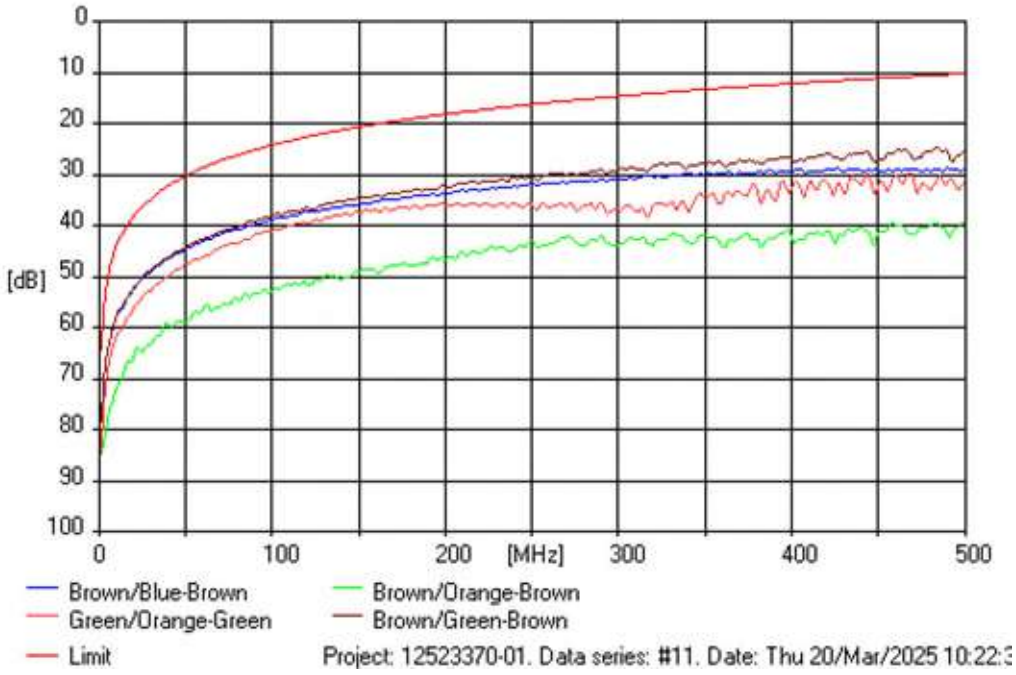


Table 28. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	77.6	64.2	13.4
4	3.5	65.8	53.3	12.4
16	16.0	52.9	40.1	12.8
100	99.6	37.6	24.2	13.4
250	250.5	29.5	16.2	13.3
500	500.0	24.1	10.2	13.9

PS ATTENUATION TO CROSSTALK RATIO - FAR (PSACR-F).

Link #2. Worst case margin: 11.5 dB at 4.7 MHz for Blue pair.

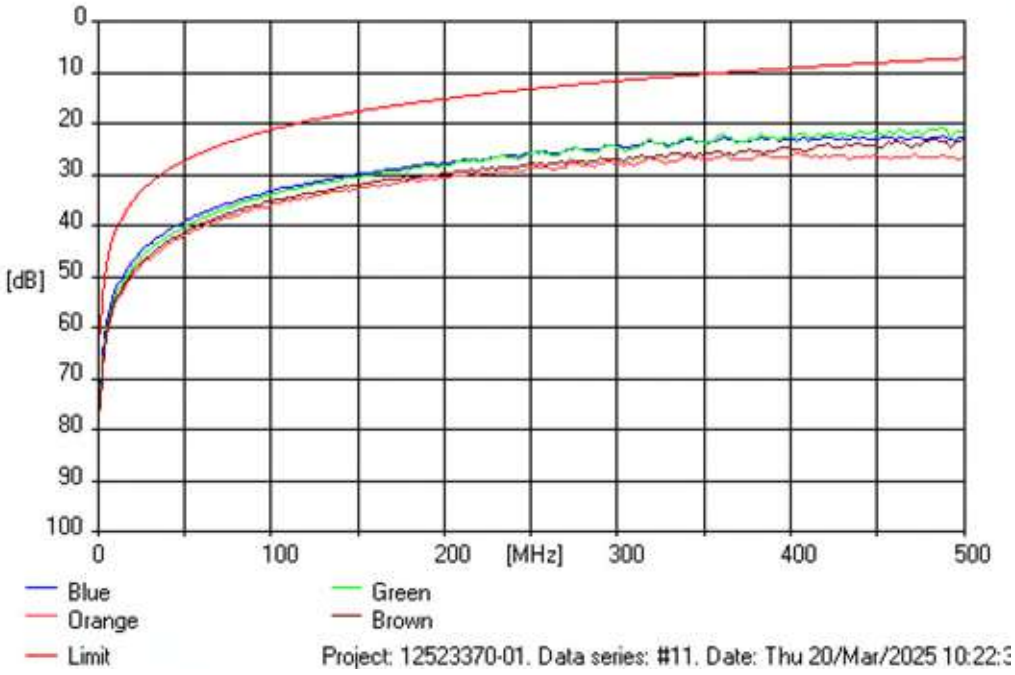


Table 29. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [dB]	Limit value [dB]	Calc. margin [dB]
1	1.0	74.5	61.2	13.3
4	3.5	62.0	50.3	11.7
16	16.0	48.9	37.1	11.8
100	99.6	33.2	21.2	12.0
250	250.5	25.7	13.2	12.5
500	500.0	21.7	7.2	14.5

PROPAGATION DELAY.

Link #2. Worst case margin: 0.027 µs at 492.5 MHz for Orange pair.

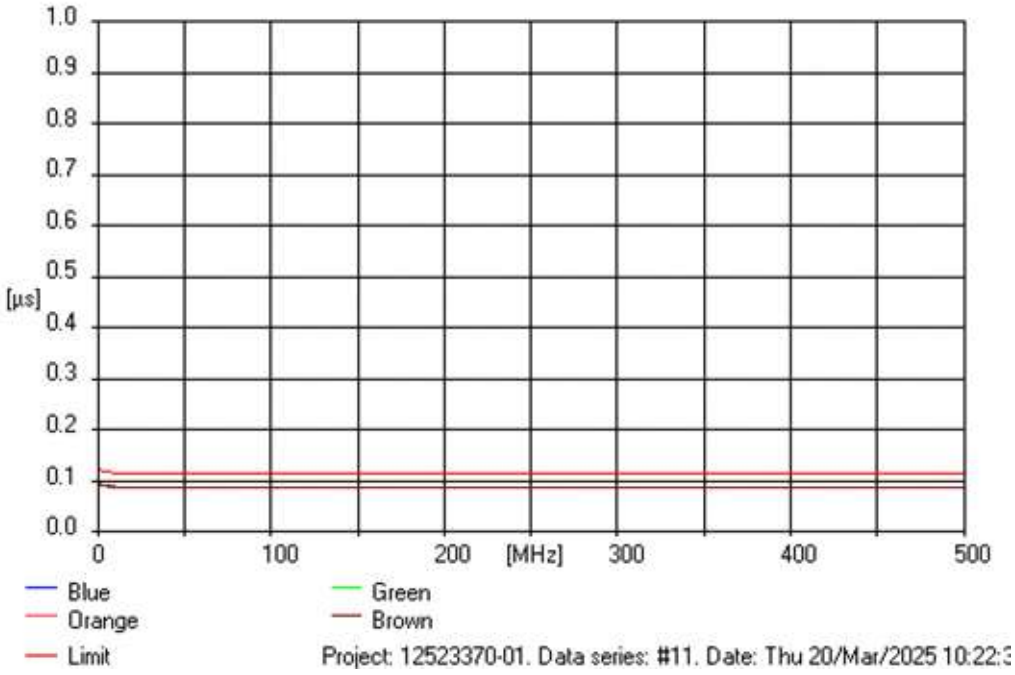


Table 30. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [ns]	Limit value [ns]	Calc. margin [ns]
1	1.0	94	122	28
4	3.5	91	118	27
16	16.0	89	116	27
100	99.6	88	115	27
250	250.5	88	115	27
500	500.0	88	115	27

DELAY SKEW.

Link #2. Worst case margin: 11.9 ns.

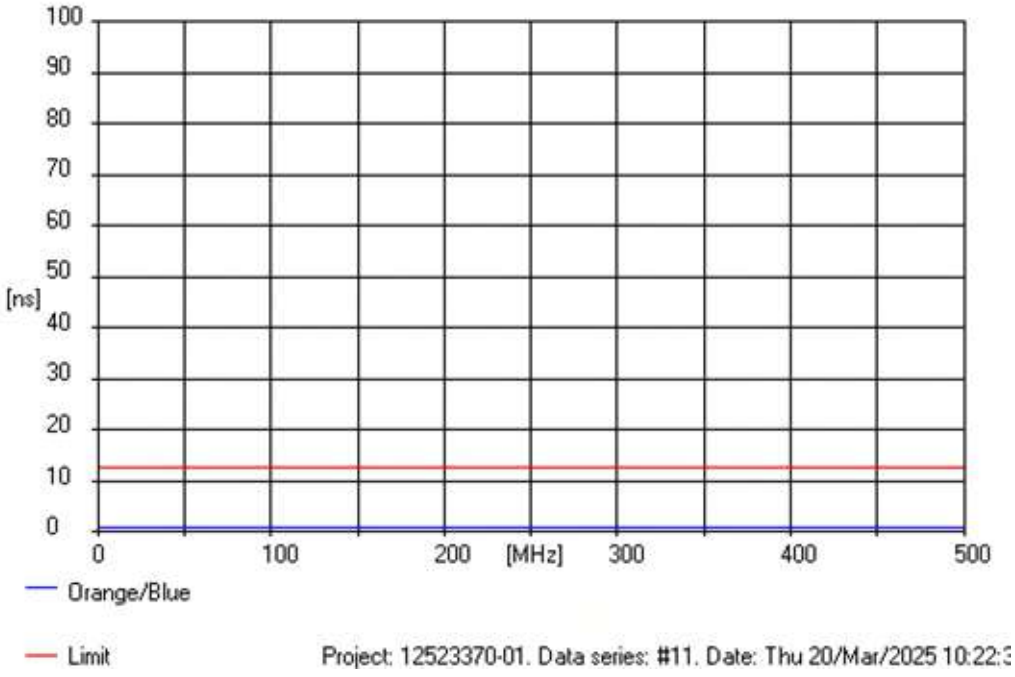


Table 31. Worst case margins at selected nominal frequencies.

Nominal Freq. [MHz]	Meas. Freq. [MHz]	Meas. value [ns]	Limit value [ns]	Calc. margin [ns]
1	1.0	0.8	12.8	11.9
4	3.5	0.8	12.8	11.9
16	16.0	0.8	12.8	11.9
100	99.6	0.8	12.8	11.9
250	250.5	0.8	12.8	11.9
500	500.0	0.8	12.8	11.9

Equipment:

Network Analyser, Agilent E5071C, 4-port	Instrument no.: 31187
Switch, Agilent, type 87050A	Instrument no.: 80139
Balun, BH, type 040-0192	Instrument no.: 31301 to 31304
Balun, BH, type 040-0192	Instrument no.: 31305 to 31308

4.5 Resistance properties

Table 32. DC loop resistance, link #1

Pair	Resistance [Ohm]	Requirement	Compliance
1	13.2	< 18.3	YES
2	13.3		YES
3	13.1		YES
4	12.9		YES

Table 33. DC resistance unbalance, link #1

Pair	R unbalance [%]	Requirement	Compliance
1	1.9	< 3 %	YES
2	1.4		YES
3	1.0		YES
4	0.0		YES

Table 34. DC resistance unbalance (between pairs), link #1

Pair	R unbalance [%]	Requirement	Compliance
1-2	0.4	<7%	YES
1-3	0.3		YES
1-4	1.1		YES
2-3	0.6		YES
2-4	1.4		YES
3-4	0.8		YES

Equipment:

Multimeter, Keithley, type DMM6500 Instrument no.: 31220

5 Reference to applicable standards and documents

Test of the cabling product is performed with reference to the following standards:

5.1 Generic cabling standards

ISO/IEC 11801-1:2017 (Ed. 1.0)
Information technology - Generic cabling for customer premises -
Part 1: General requirements

ISO/IEC 11801-2:2017 (Ed. 1.0)
Information technology - Generic cabling for customer premises -
Part 2: Office premises

CENELEC EN 50173-1:2018
Information Technology - Generic cabling systems - Part 1: General requirements

CENELEC EN 50173-2:2018
Information technology - Generic cabling systems - Part 2: Office spaces

TIA-568.2-D:2018
Balanced Twisted-Pair Telecommunications Cabling and Components Standard

5.2 Special requirements for EC VERIFIED

DQP231006 (version 29, May 2018)
Terms and conditions for the EC VERIFIED programme for Generic and Coaxial cabling

6 Test procedures

The tests carried out on the communication cabling under test are performed according to the standard: IEC 61935-1 Specification for the testing of balanced and coaxial information technology cabling - Part 1: Installed balanced cabling as specified in ISO/IEC 11801 and related standards.

The test methods are detailed in test procedures worked out by FORCE and approved by DANAK. In this section the procedures are described briefly.

6.1 Electrical test

The electrical tests on the communication link under test are performed according to the procedures described in this section. The performed tests are shown in the following table. The floor cable is stretched on a non-conductive surface.

Table 35. Performed tests

	Measured from	
	Equipment end (patch panel)	**Terminal end (wall outlet)**
Attenuation	x	
Near end crosstalk (NEXT)	x	x
Attenuation to crosstalk ratio far (ACR-F)	x	
Return loss	x	x
Propagation delay	x	
Delay skew	x	
Resistance properties	x	

6.1.1 Attenuation

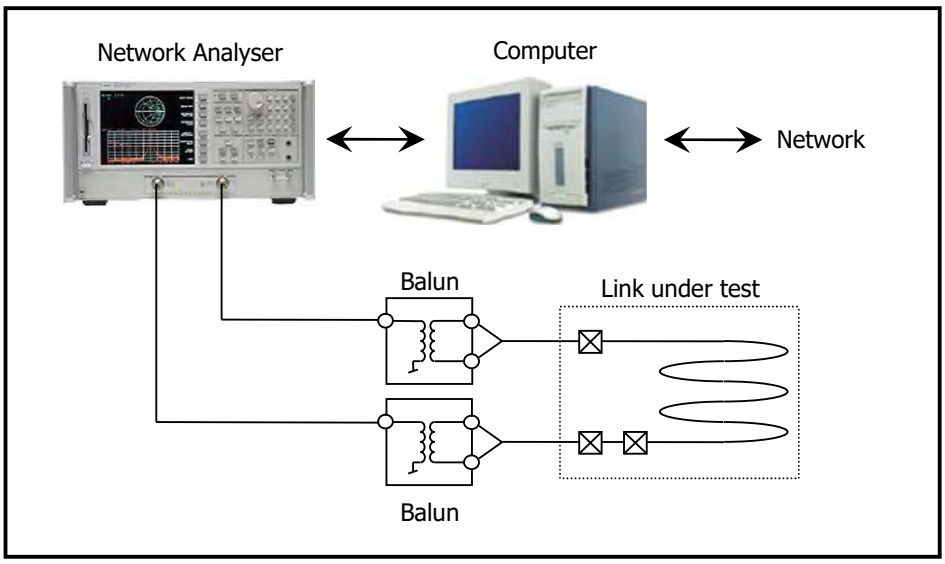


Figure 3. Test set-up for attenuation measurements.

Terminal end and equipment end are connected to one balun each.

The measurement uncertainty for Attenuation is dependent of the level of measured Attenuation. The uncertainty is shown in the table below:

Measured attenuation	Uncertainty
1 dB	±0.1 dB
10 dB	±0.3 dB
60 dB	±0.5 dB
80 dB	±2 dB

6.1.2 Return loss

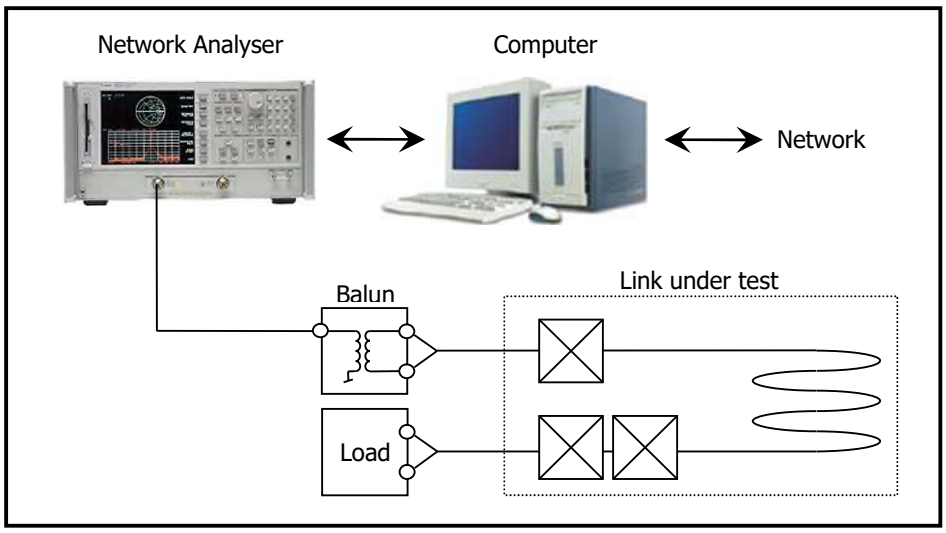


Figure 4. Test set-up for return loss measurements.

The return loss of the link under test is measured with the far end terminated with a resistance of the specified characteristic impedance of the link under test.

The measurement uncertainty for impedance is ±1.7 % at 100 MHz.
The measurement uncertainty for return loss is dependent of the measured return loss value. The error band is specified in the table below:

Measured return loss	Error band
5 dB	±0.2 dB
10 dB	±0.3 dB
15 dB	±0.5 dB
20 dB	±1 dB
25 dB	±2 dB
30 dB	±3 dB

At frequencies above 500 MHz add ±1 dB to the uncertainty.

6.1.3 Near end crosstalk (NEXT)

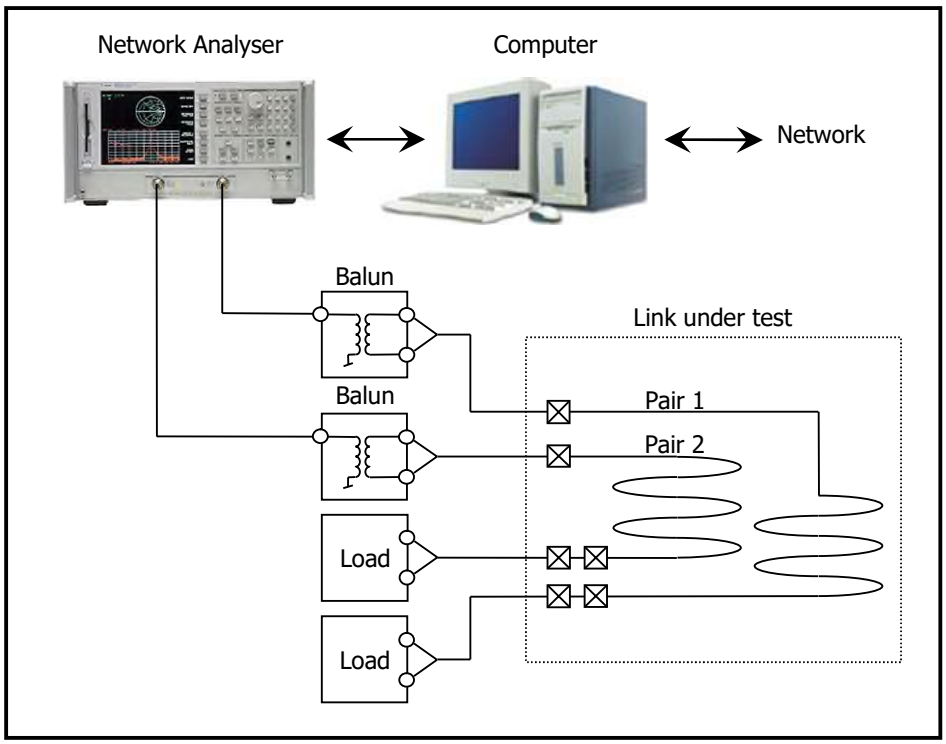


Figure 5. Test set-up for near end cross talk measurements.

Near end crosstalk, NEXT, is measured as the attenuation from one pair to the others and these measurements are repeated for all pair combinations.

In the far end all pairs are terminated with a resistor with a value of the nominal characteristic impedance of the component under test.

The measurement uncertainty for NEXT is dependent of the level of measured NEXT.
The uncertainty is shown in the table below:

Measured NEXT	Uncertainty
40 dB	±0.5 dB
60 dB	±0.6 dB
70 dB	±0.8 dB
80 dB	±1.7 dB

6.1.4 Powersum near end crosstalk (PSNEXT)

PSNEXT is calculated for each pair according to the formula:

$$PSNEXT = -10\,log(\,10^{-x1/10} + 10^{-x2/10} + 10^{-x3/10})$$

where x1, x2, x3 are the pair-to-pair crosstalk measurements in dB between the selected pair and the other three pairs.

The measurement uncertainty is the same as for NEXT measurements.

6.1.5 Attenuation to crosstalk loss ratio (ACR-N)

Attenuation to crosstalk ratio loss near end, ACR-N is calculated for each pair as the difference between the near end crosstalk loss and the attenuation.

The measurement uncertainty is the same as for NEXT measurements.

6.1.6 Power sum ACR (PSACR-N)

PSACR-N is calculated according to the formula:

$$PSACR - N = -10log\,(10^{-x1/10} + 10^{-x2/10} + 10^{-x3/10})$$

where x1, x2 and x3 are the ACR-N values in dB between the selected pair and the other three pairs.

The measurement uncertainty is the same as for NEXT measurements.

6.1.7 Attenuation to crosstalk ratio-far end (ACR-F)

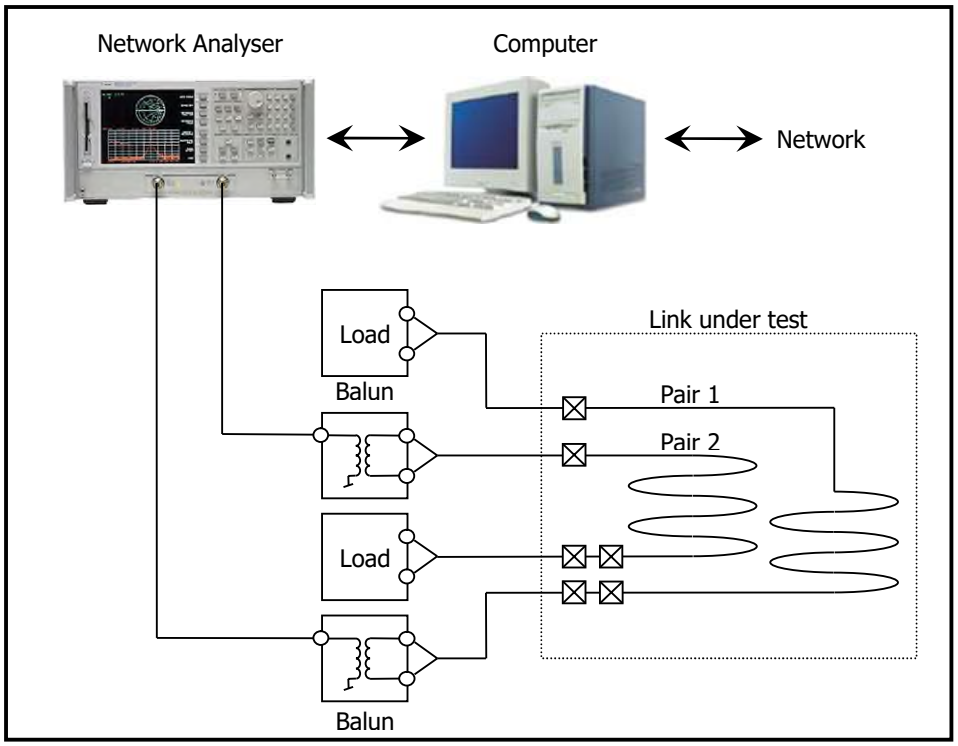


Figure 6. Test set-up for far end crosstalk measurements.

ACR-F is calculated from the measured values of far end cross talk, FEXT and attenuation, ATT.

ACR-F = FEXT - ATT

The measurement uncertainty for ACR-F is the sum of uncertainties for NEXT and ATT.

6.1.8 Power sum attenuation to crosstalk ratio far end (PSACR-F)

PSACR-F is calculated for each pair according to the equation:

$$PSACR - F = PSFEXT - ATTENUATION$$

$$PSFEXT = -10\,log(\,10^{-x1/10} + 10^{-x2/10} + 10^{-x3/10})$$

Where x1, x2, x3 are the pair-to-pair crosstalk measurements in dB between the selected pair and the other three pairs.

6.1.9 Propagation delay

Propagation delay is measured by determining the phase delay of a signal transmitted through the cable.

$$\delta = \frac{\varphi}{2\pi \times f}$$

where φ is the phase delay, f is the frequency in Hertz.

The measurement uncertainty for delay is ±1 %.

6.1.10 Delay skew

Delay skew is calculated as the difference between the maximum and minimum propagation delay over the four pairs at each frequency.

The measurement uncertainty for skew is ±10 %.

6.1.11 DC loop resistance

DC loop resistance is measured for each conductor in a pair. The loop resistance is calculated by adding the resistance of each conductor. The measured value is corrected for the temperature of the test object in order to obtain the resistance at 20 °C.

The measurement uncertainty for DC resistance is ±1.4 %.

APPENDIX

Appendix 1 Test software

Test software according to information in the table below is used for the conducted tests.

Software name	Function	File name	Version	Date
Cablingtotal	Electrical cable HF tests	Cabltot	4.14	19.03.2021
ECCalculate	Calculated parameters	ECCalculate	12.00	15.11.2019
ECReport	Makes graphs	Xreport.exe	43.00	01.08.2014
Report 2002	Automatic report processing	Rapport.exe	2.4	25.11.2020
Report 2002 Database	Data and documents	Cable report	5.80	15.06.2021
Journal	Keeps journal data	Journal*.xlsm	5.01	25.11.2022
Worksheets	Keeps data	Work*.xlsm	13.0	19.02.2025