
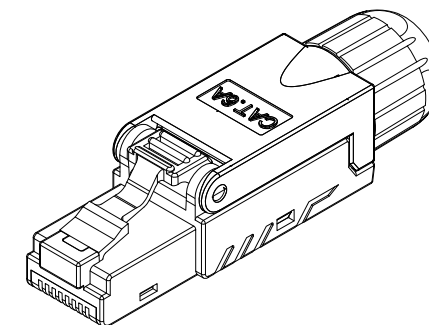
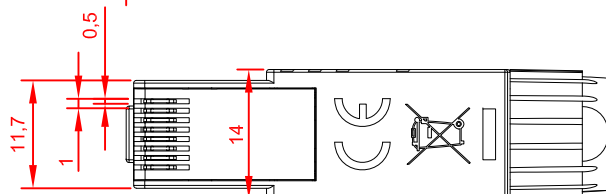

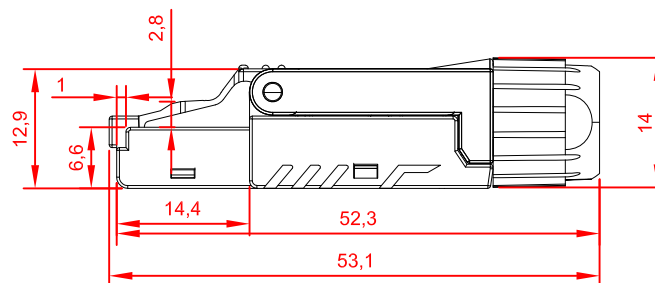
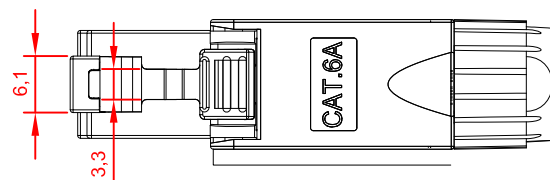








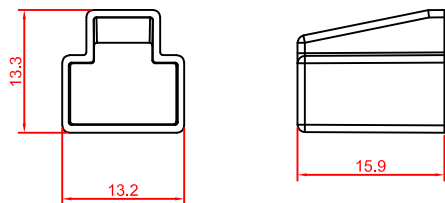

NOTES:

ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PC
2. PCB MATERIAL:FR-4 T=1.6mm
3. CONTACT MATERIAL:PHOSPHOR BRONZE
STAMP PIN 0.30mm
4. IDC LIFE:200 TIMES MIN
5. WIRE:AWG 23-26
6. Nut material:Plastic

					Neklan Stay connected!						
					Material					Item No.	1012905
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	UTP Cat.6a Tolless-plug RJ45
							A4	X:1	mm		
Drawn				Tolerance				A4	X:1	mm	ERP
Checked				0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle +30'							
Approved											
					Sheet	1 OF 1		Version: A/0		Part No.	