




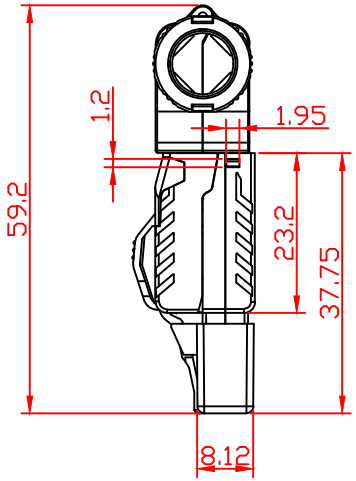

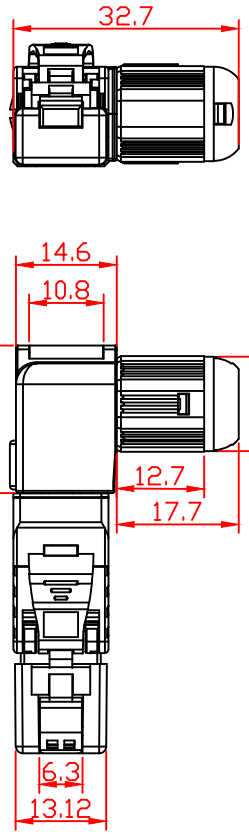

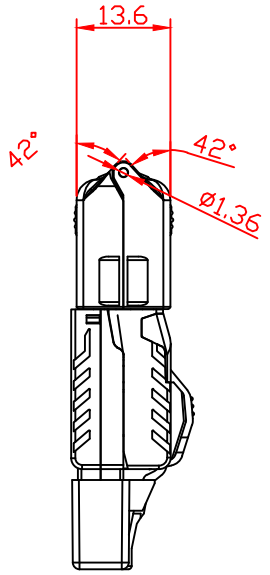

ELECTRICAL:

1. CONTACT RESISTANCE:20M OHMS MAX
2. INSULATION RESISTANCE:250M OHMS MIN @500 DC
3. WITHSTAND VOLTAGE:DC1000V AC700V RMS 60HZ, IMIN
4. CAT6 PERMANENT LINK:CONFORM TO ANST/TIA/EIA 568B.2-10

ENVIRONMENTAL:


5. STORAGE:-40° / +70°
6. OPERATION:-10° / 60°

MECHANICAL:

7. PLASTIC MATERIAL: PC
8. IDC MATERIAL:PC
9. THE SHELL MATERIAL: ZINC ALLOY
10. RJ45 CONTACT LIFE:750 TIMES MIN
11. IDC LIFE: 200 TIMES MIN

TYPE:

12. SNHIELDED CAT6ATOOLLESS PLUG



SYM	Number	Bill No. of Alteration	Signature	Date

Drawn	Ding jian bo	2016.1.14	Tolerance
Checked	Ge pei jun	2016.1.14	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30'
Approved	Wang wei jun	2016.1.14	

Neklan
Stay connected!

Material	ABS			Item No.	1012912
Angles Projection	Size	Scale	Unit	Part Name	Cat.6A shielded toolless type plug
	A4	X:1	mm		
Sheet 1 OF 1		Version: A/0		ERP Part No.	