


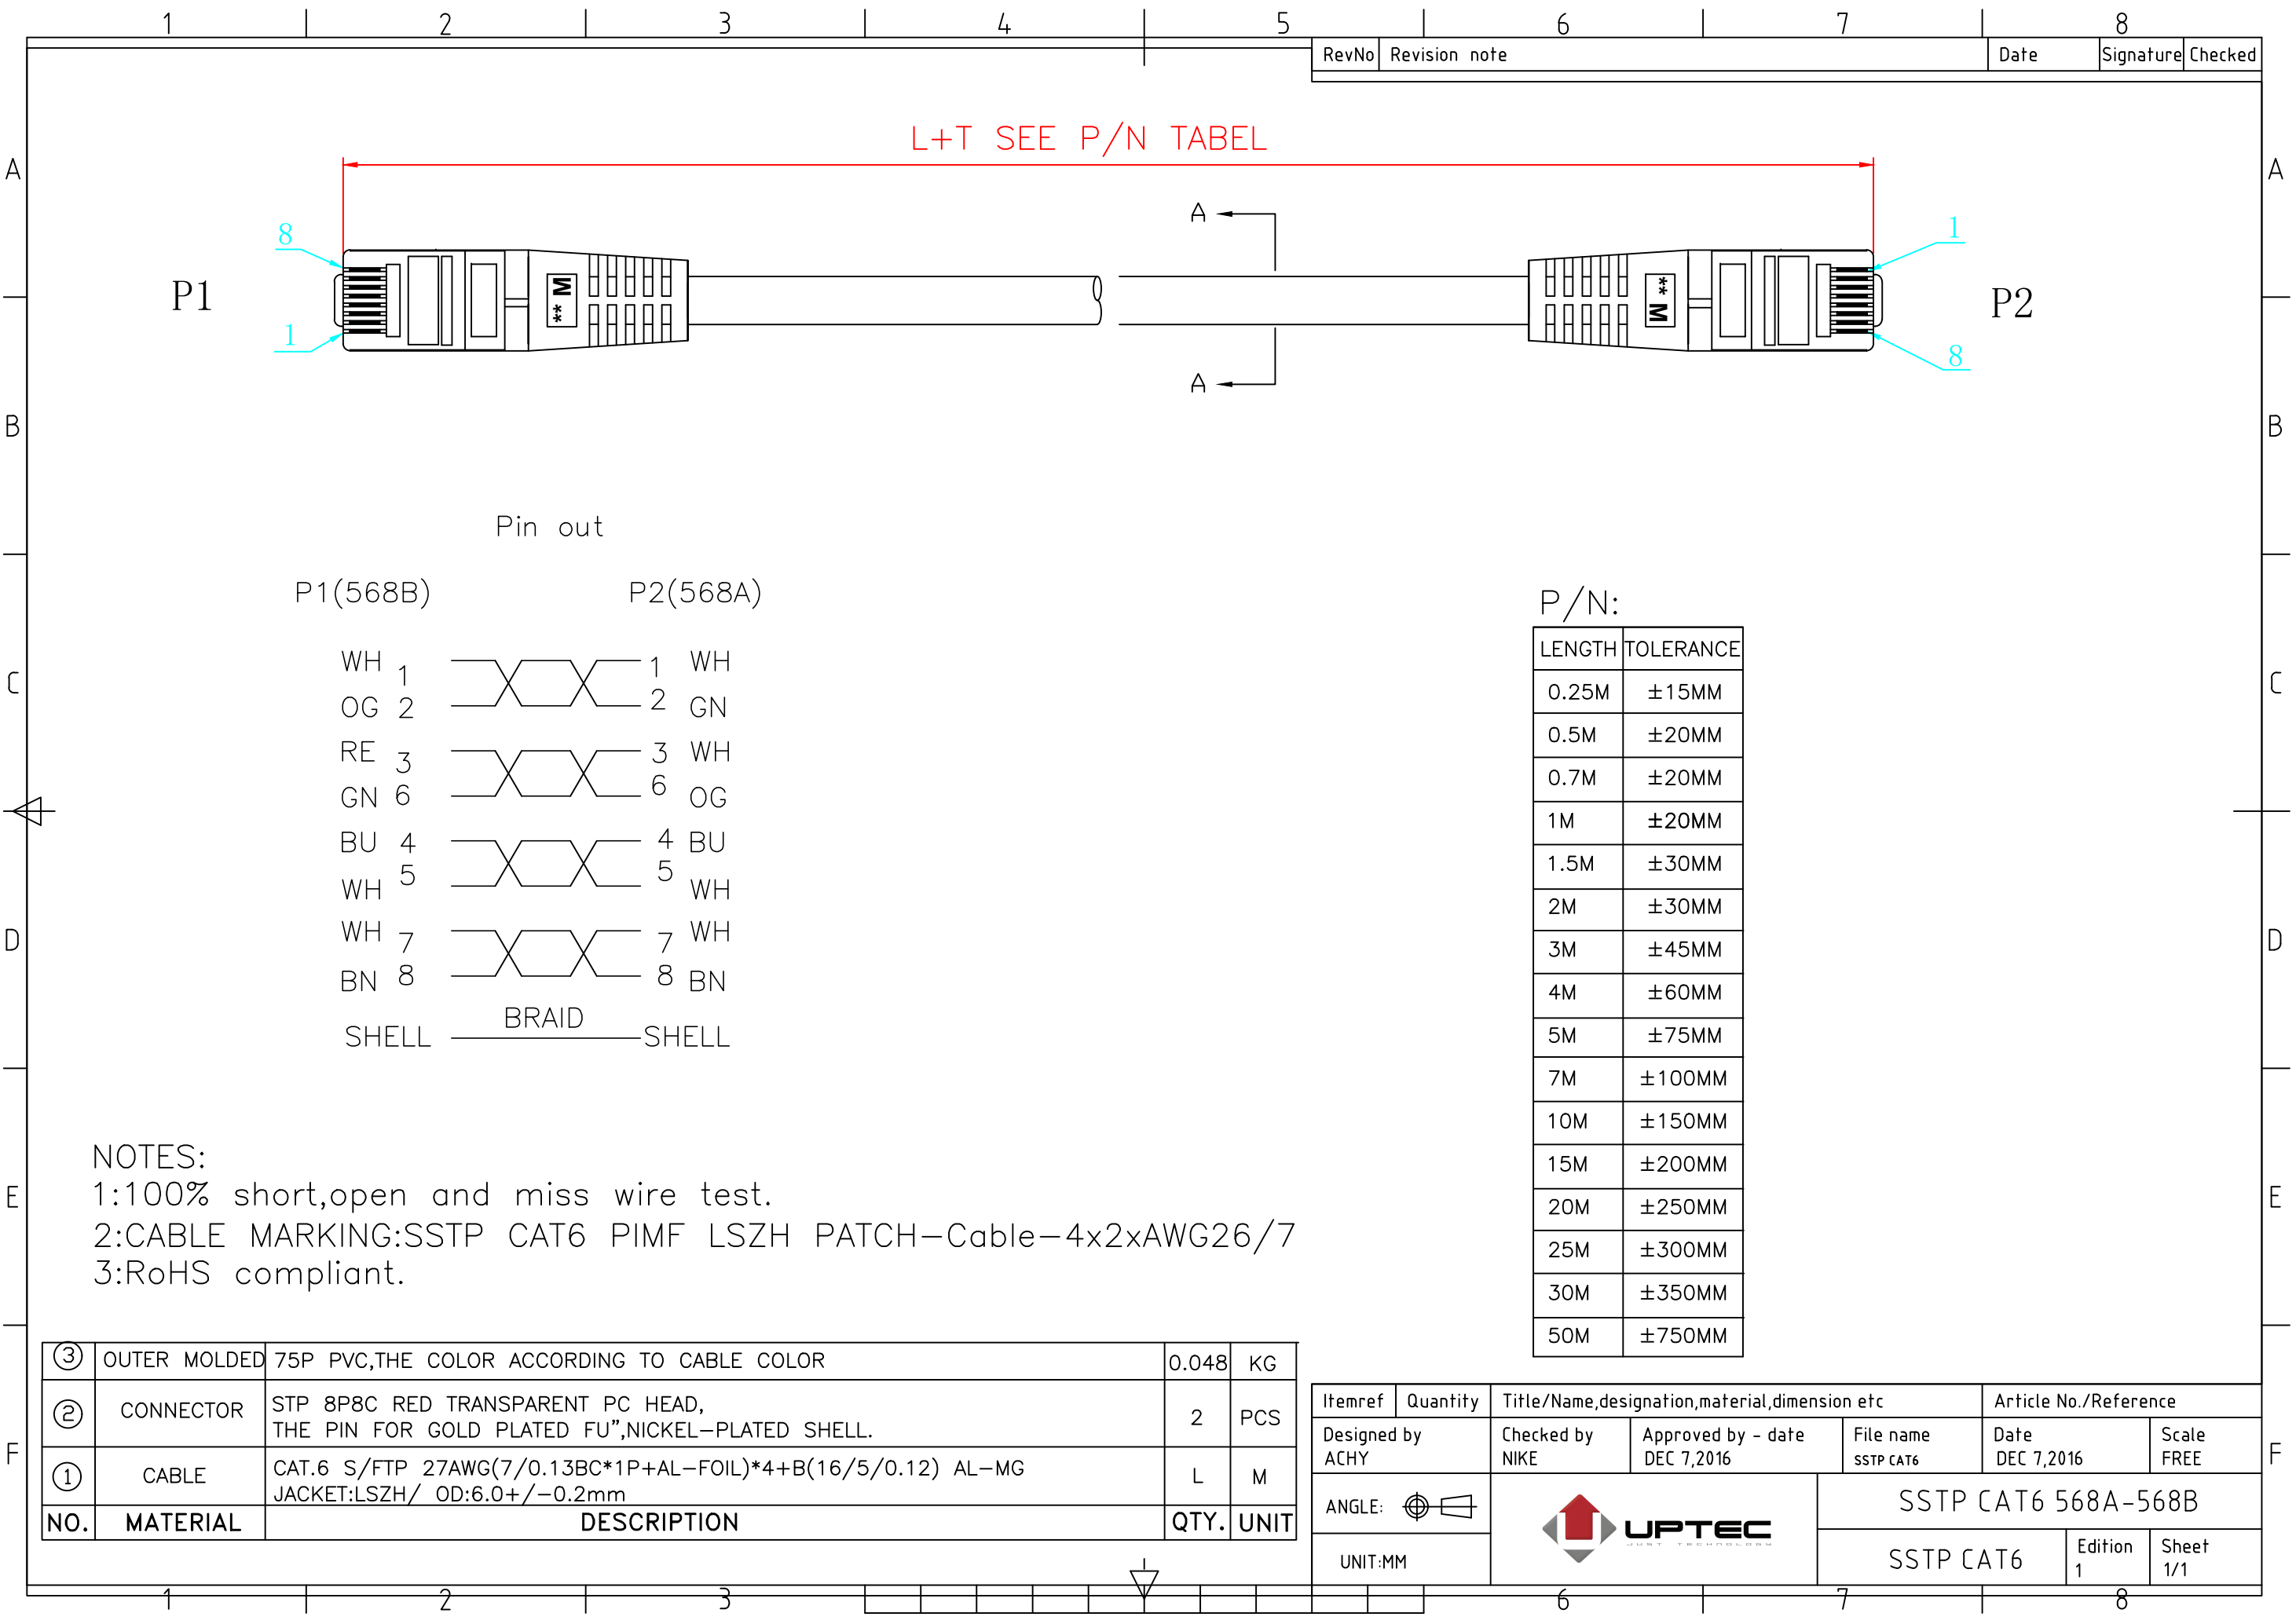

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

Pin out

P1(568B)		P2(568A)
WH 1		1 WH
OG 2		2 GN
RE 3		3 WH
GN 6		6 OG
BU 4		4 BU
WH 5		5 WH
WH 7		7 WH
BN 8		8 BN
SHELL	BRAID	SHELL

P/N:	
LENGTH	TOLERANCE
0.25M	±15MM
0.5M	±20MM
0.7M	±20MM
1M	±20MM
1.5M	±30MM
2M	±30MM
3M	±45MM
4M	±60MM
5M	±75MM
7M	±100MM
10M	±150MM
15M	±200MM
20M	±250MM
25M	±300MM
30M	±350MM
50M	±750MM

NOTES:
1:100% short,open and miss wire test.
2:CABLE MARKING:SSTP CAT6 PIMF LSZH PATCH-Cable-4x2xAWG26/7
3:RoHS compliant.

③	OUTER MOLDED	75P PVC,THE COLOR ACCORDING TO CABLE COLOR	0.048	KG
②	CONNECTOR	STP 8P8C RED TRANSPARENT PC HEAD, THE PIN FOR GOLD PLATED FU",NICKEL-PLATED SHELL.	2	PCS
①	CABLE	CAT.6 S/FTP 27AWG(7/0.13BC*1P+AL-FOIL)*4+B(16/5/0.12) AL-MG JACKET:LSZH/ OD:6.0+/-0.2mm	L	M
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Itemref	Quantity	Title/Name,designation,material,dimension etc				Article No./Reference	
Designed by ACHY		Checked by NIKE	Approved by - date DEC 7,2016	File name SSTP CAT6	Date DEC 7,2016	Scale FREE	
ANGLE: 		 UPTEC U P T E C		SSTP CAT6 568A-568B			
UNIT:MM				SSTP CAT6		Edition 1	Sheet 1/1