



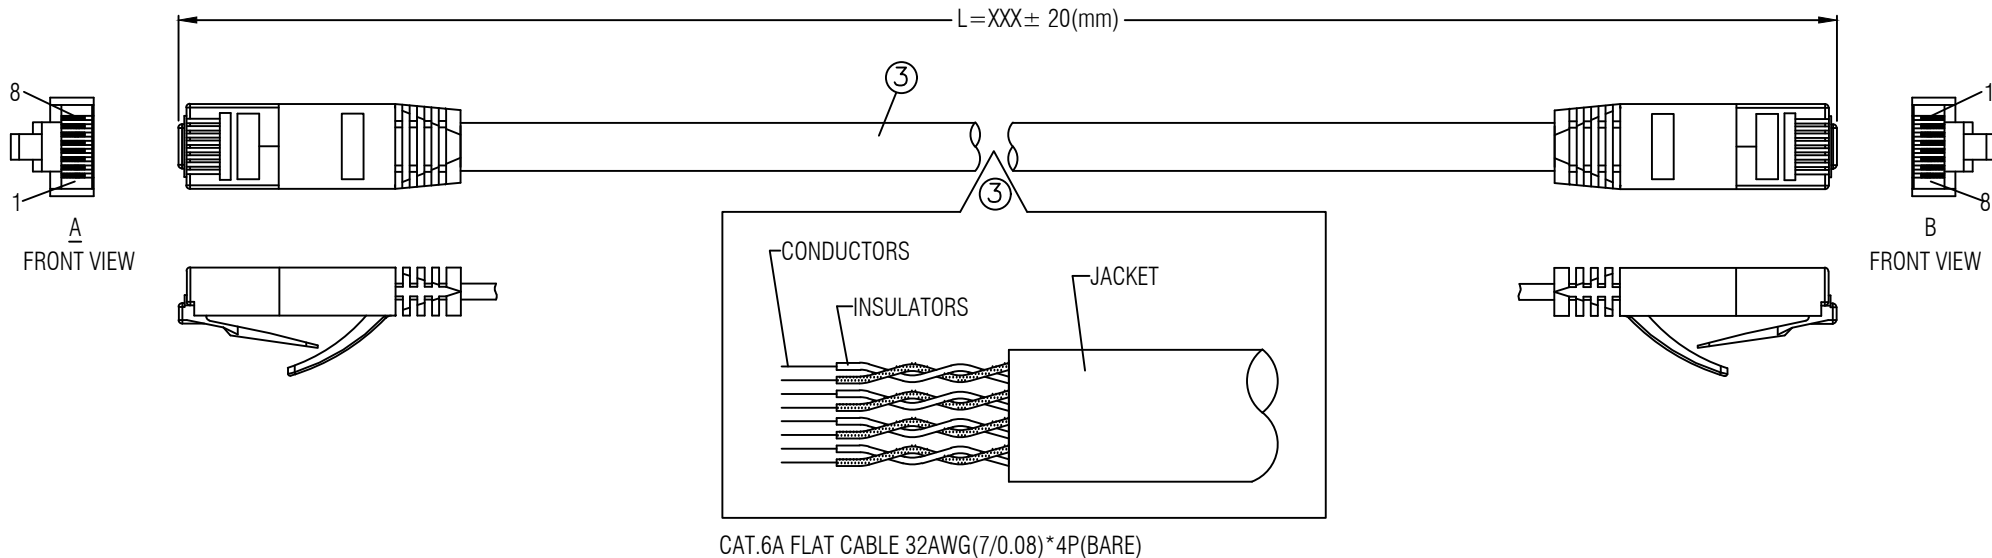


CHART:

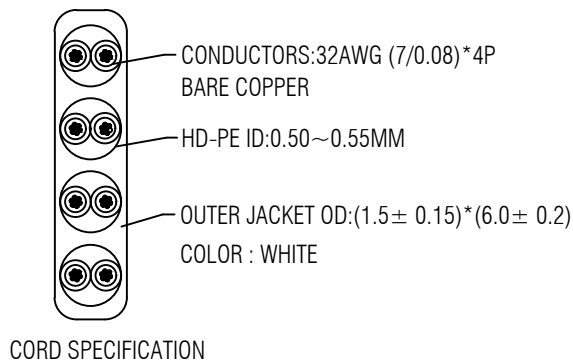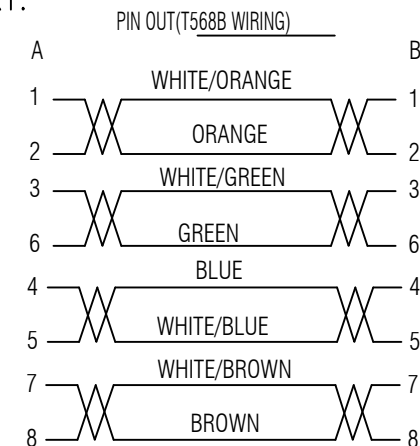

NOTES:

- 1.ELECTRICAL TEST:100% OPEN,SHORT & MISS WIRE TEST.
- 2.CONDUCTOR RESISTANCE : 2 OHMS MAX. INSULATOR RESISTANCE: 5M OHMS MIN.
- 3.HI-POT: DC 300V 0.01sec.
4. ALL MATERIAL FIT ROHS STANDARD(INCLUDE ALL PACKING OR OTHER MATERIAL).
- 5.PRINT WORD: " CAT.6A FLAT CABLE "

Neklan 
Stay connected!

			DESCRIPTION:	ASSEMBLY FOR RJ45/M-RJ45/M		NO.	CKEN00000
REV	DESCRIPTION	DATE	NO.	SPECIFICATION STANDARD	QT'Y	ITEM NO.	
1.0	DRAWING ISSUE	2023.02.14	①	RJ45 MALE CONNECTOR,PIN GOLD PLATED Fu".	2	DRAWN BY:	Mark
			②	50P LSZH OUTER MOLDING HOUSING,COLOR:XX	2	CHECKED BY:	Chris
			③	CAT.6A FLAT CABLE 32AWG(7/0.08)*4P(BARE COPPER),COLOR:XX	1	DATE:	2023.02.14
						APPVL BY:	ZHL
						SCALE:	NONE
						TOLER:	±0.20
						REV:	1.0