

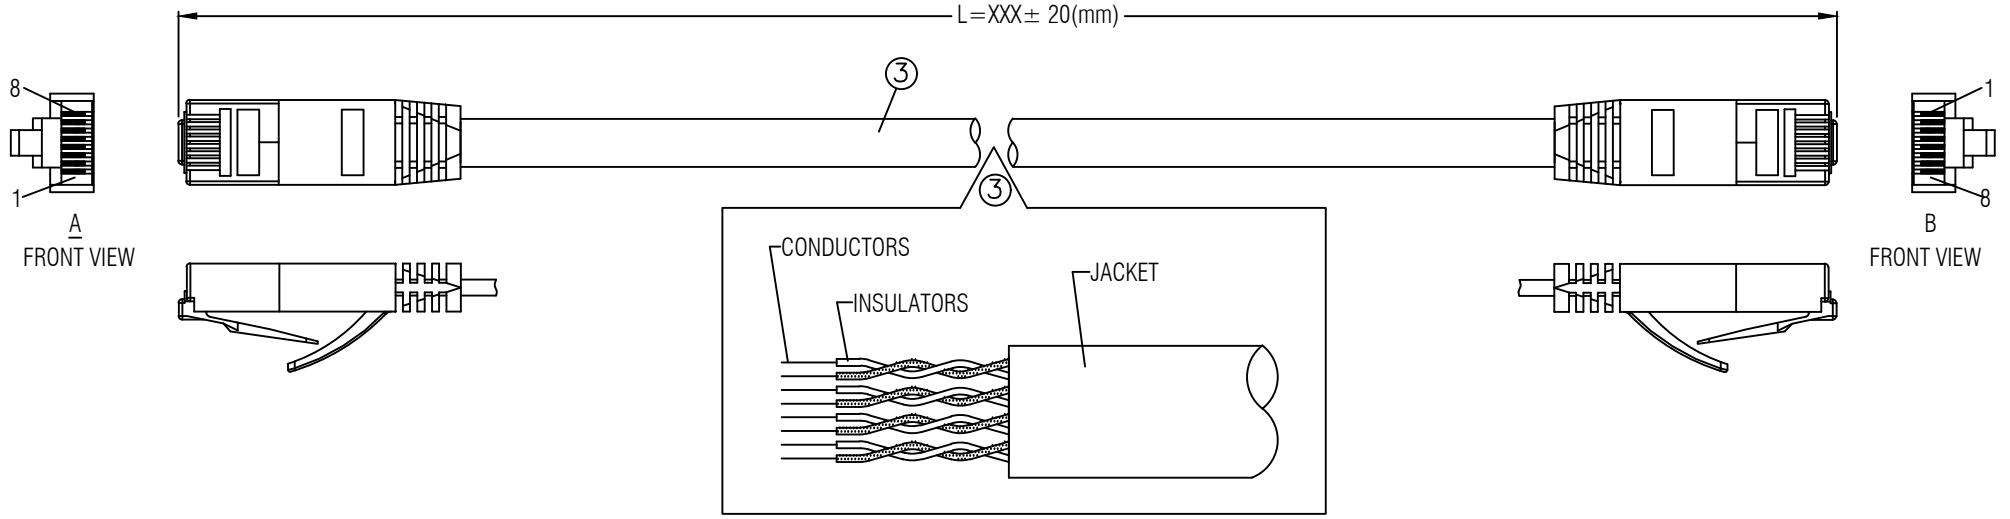


CAT.6A FLAT CABLE 32AWG(7/0.08)*4P(BARE)

CHART:

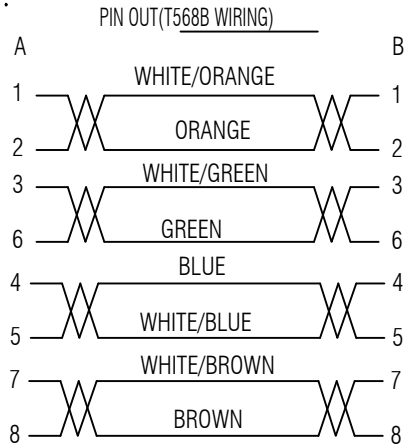



CONDUCTORS:32AWG (7/0.08)*4P
BARE COPPER

HD-PE ID:0.50～0.55MM

OUTER JACKET OD:(1.5± 0.15)*(6.0± 0.2)
COLOR : WHITE

CORD SPECIFICATION

NOTES:
1.ELECTRICAL TEST:100% OPEN,SHORT & MISS WIRE TEST.
2.CONDUCTOR RESISTANCE : 2 OHMS MAX. INSULATOR RESISTANCE: 5M OHMS MIN.
3.HI-POT: DC 300V 0.01sec.
4. ALL MATERIAL FIT ROHS STANDARD(INCLUDE ALL PACKING OR OTHER MATERIAL).
5.PRINT WORD: " CAT.6A FLAT CABLE "

NO.	SPECIFICATION STANDARD	QT'Y
①	RJ45 MALE CONNECTOR,PIN GOLD PLATED Fu".	2
②	50P LSZH OUTER MOLDING HOUSING,COLOR:XX	2
③	CAT.6A FLAT CABLE 32AWG(7/0.08)*4P(BARE COPPER),COLOR:XX	1

REV	DESCRIPTION	DATE
1.0	DRAWING ISSUE	2023.02.14

Neklan
Stay connected !

DESCRIPTION:	ASSEMBLY FOR RJ45/M-RJ45/M			NO.	CKEN00000
ITEM NO.		DRAW NO.	C6A-FLAT-XM-BK	PAGE:	1 OF 1
DRAWN BY:	Mark	UNIT:	mm	SCALE:	NONE
CHECKED BY:	Chris	DATE:	2023.02.14	TOLER:	±0.20
APPVL BY:	ZHL			REV:	1.0