


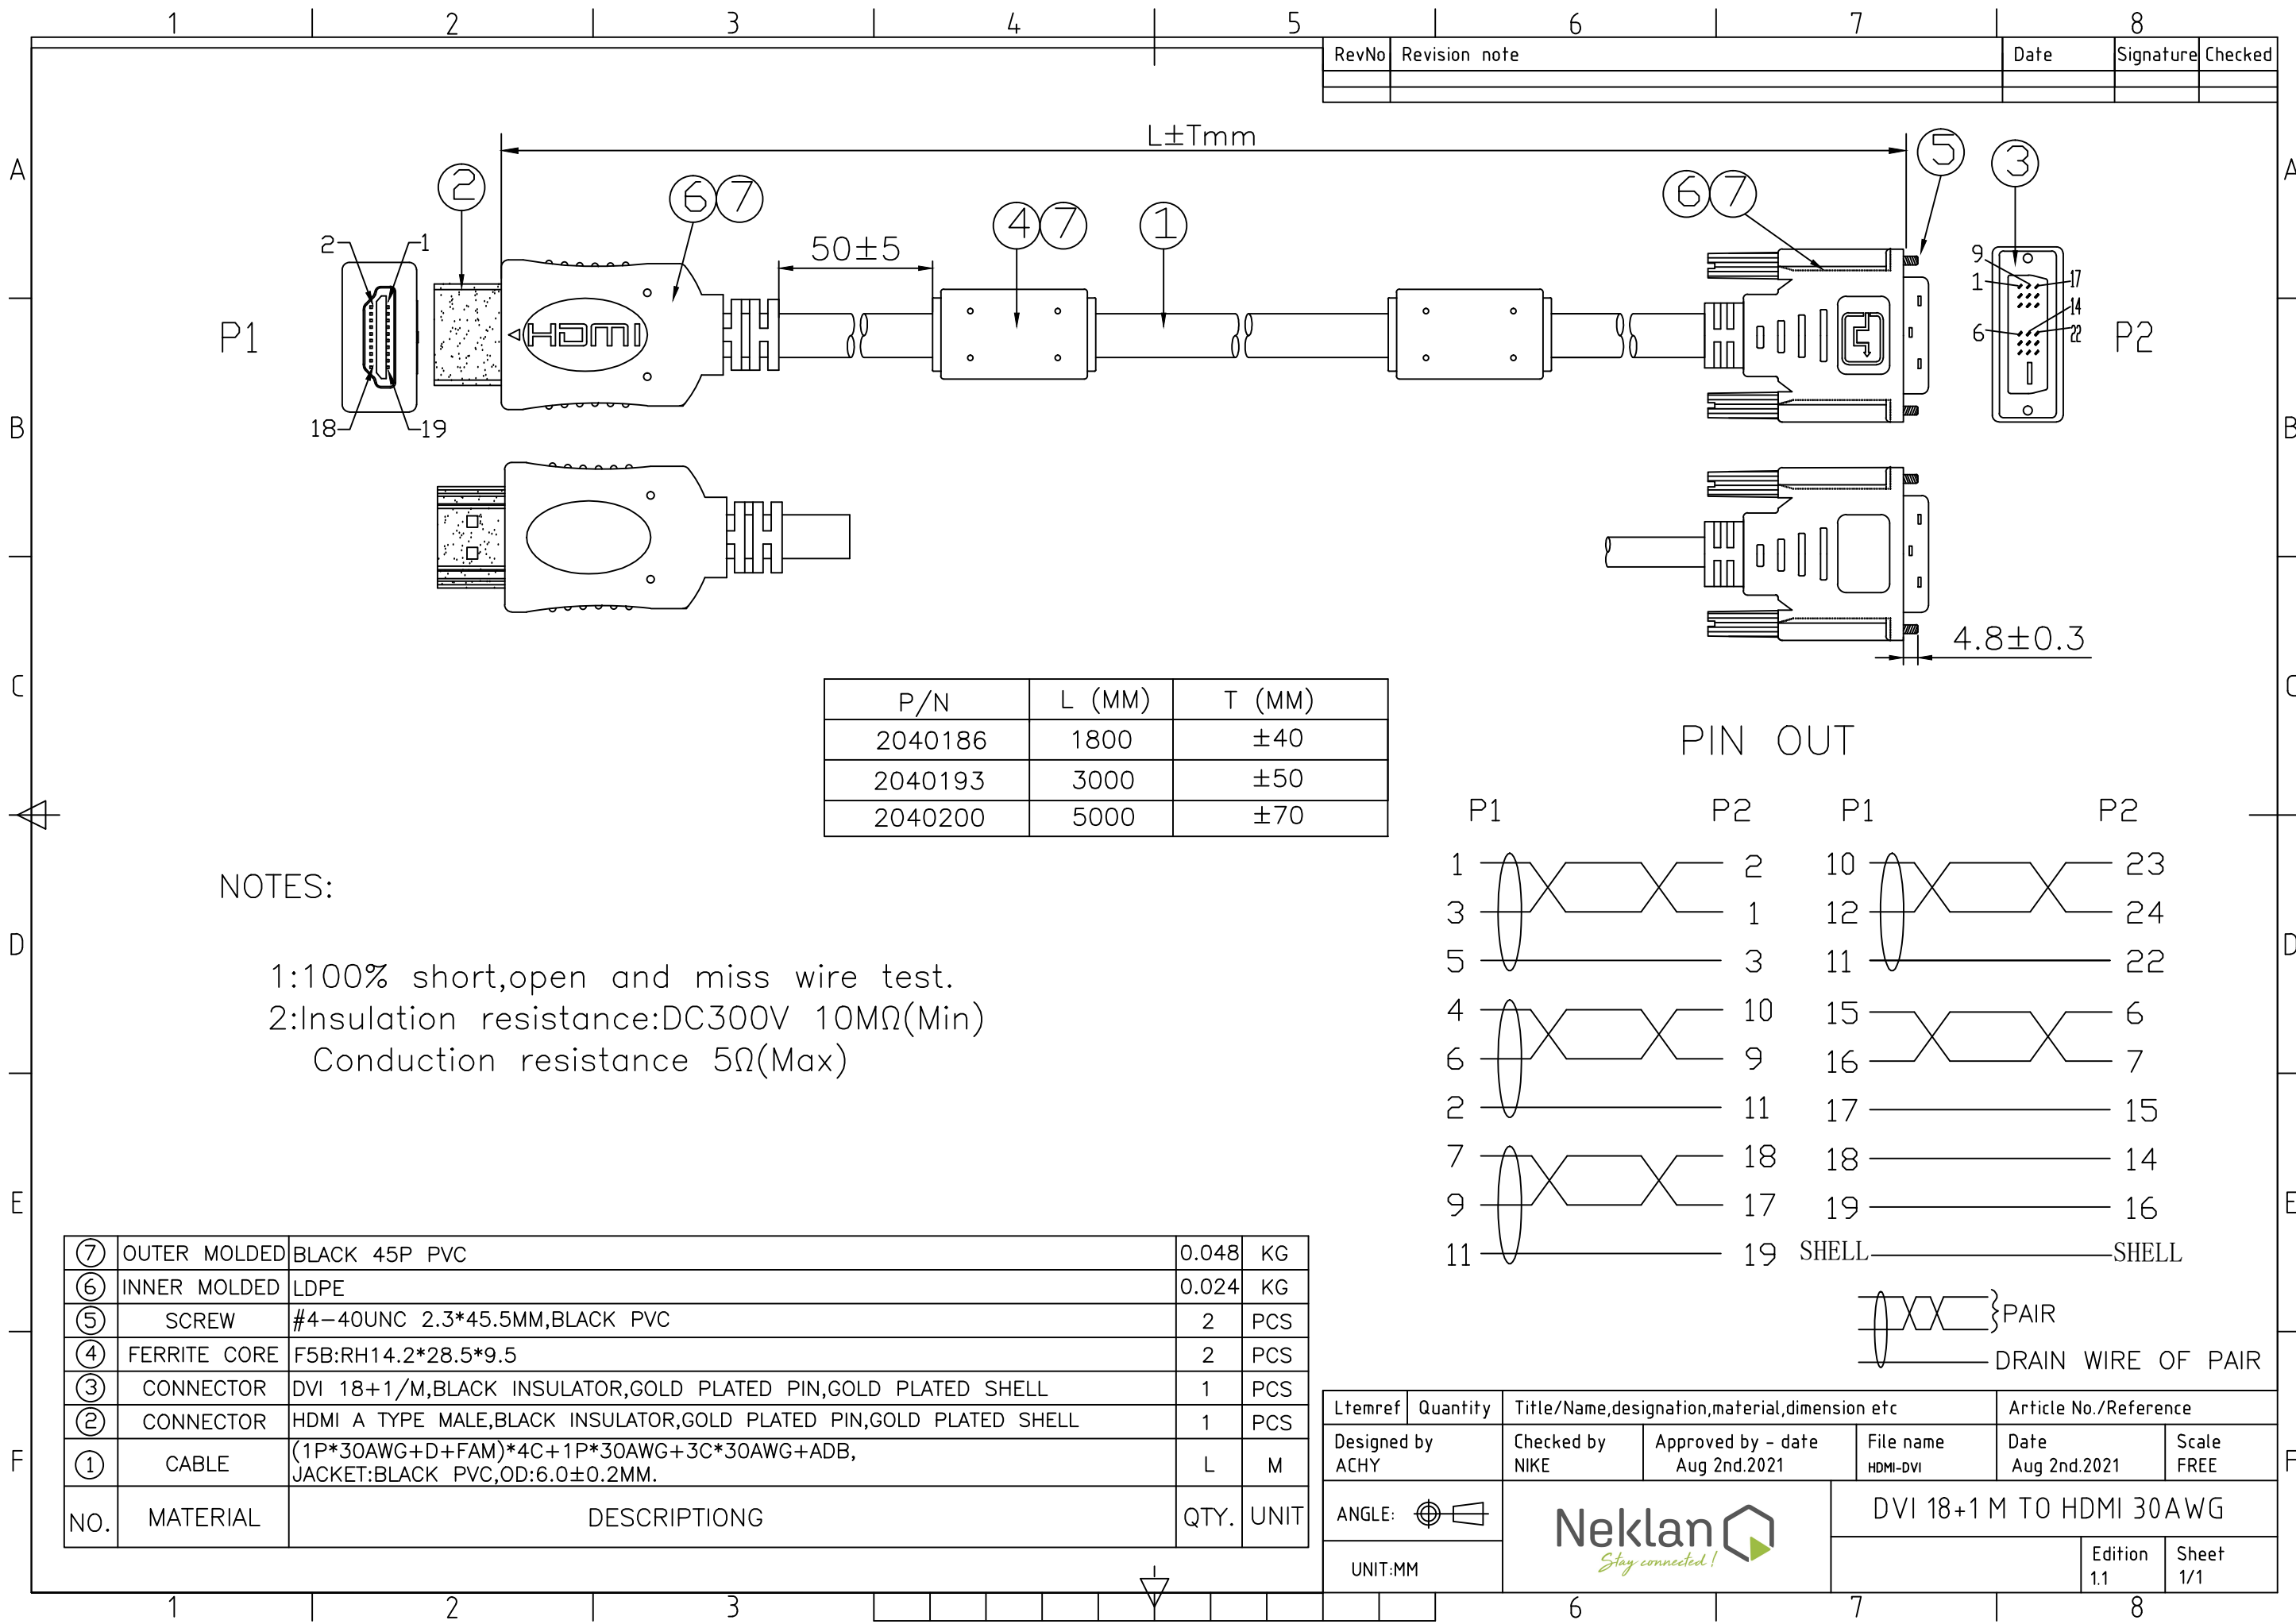


RevNo	Revision note	Date	Signature	Checked

P/N	L (MM)	T (MM)
2040186	1800	±40
2040193	3000	±50
2040200	5000	±70

NOTES:

1:100% short,open and miss wire test.
2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

PIN OUT

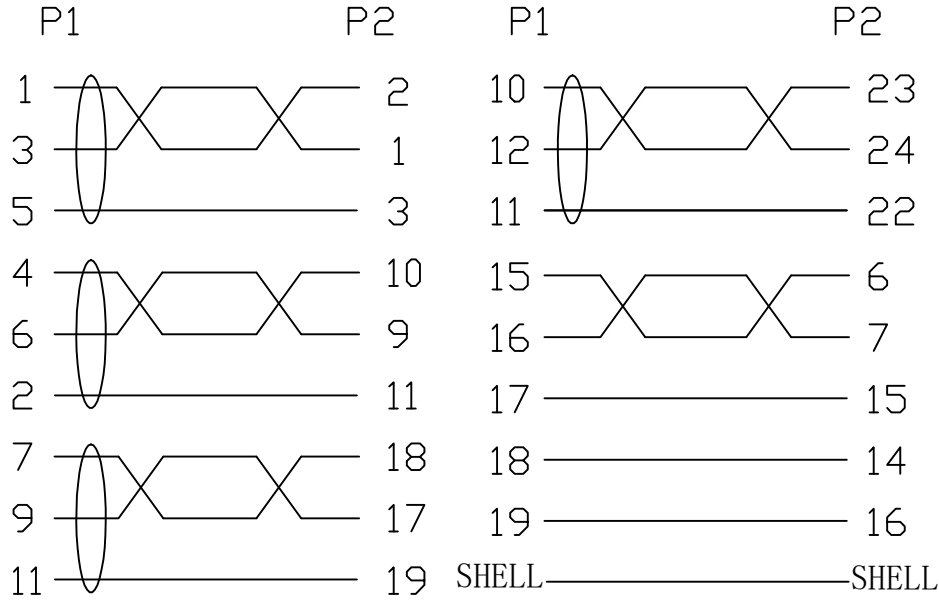

⑦	OUTER MOLDED	BLACK 45P PVC	0.048	KG
⑥	INNER MOLDED	LDPE	0.024	KG
⑤	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	2	PCS
④	FERRITE CORE	F5B:RH14.2*28.5*9.5	2	PCS
③	CONNECTOR	DVI 18+1/M,BLACK INSULATOR,GOLD PLATED PIN,GOLD PLATED SHELL	1	PCS
②	CONNECTOR	HDMI A TYPE MALE,BLACK INSULATOR,GOLD PLATED PIN,GOLD PLATED SHELL	1	PCS
①	CABLE	(1P*30AWG+D+FAM)*4C+1P*30AWG+3C*30AWG+ADB, JACKET:BLACK PVC,OD:6.0±0.2MM.	L	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by ACHY		Checked by NIKE	Approved by – date Aug 2nd.2021	File name HDMI-DVI	Date Aug 2nd.2021	Scale FREE
ANGLE: 				DVI 18+1 M TO HDMI 30AWG		
UNIT:MM						Edition 1.1