



Adaptateur HDMI M vers DisplayPort F - 0.2m - avec cordon USB 0.8m

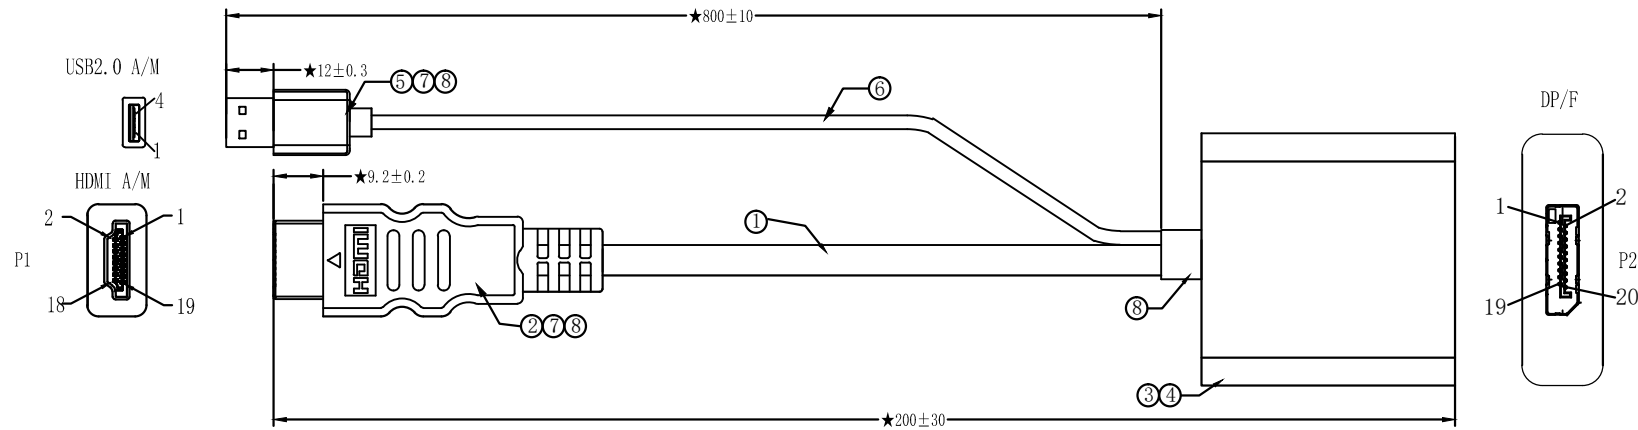

REQUIREMENTS:

- 1:100% Open circuit and short circuit test.
- 2:Insulation resistance:10MΩ(Min)
- 3:Conduction resistance:3Ω(Max)
- 4:Voltage:DC 300V/0.02S
- 5:Use testing:4KX2K@60Hz

⑧	OUTER MOLDED	PVC Black 45P		G
⑦	INNER MOLDED	LEPE		G
⑥	CABLE	UL2464 #28(TS)*2C ,PVC Black 80P,OD:3.0	1	PCS
⑤	CONNECTOR	USB2.0 A Male,The Pin Gold Plating FU",The Shell For Plating G/F White Insulation	2	PCS
④	SHELL	DP/F ABS Black 42.44*12.5*5.9mm (VGA/HDMI/DVI)F Black(Hole size OD:12*8MM):ABS L44.8*W44.8mm	1	PCS
③	CONNECTOR	PCBA:HDMI TO DP With Power. LT6711A.Terminal G/F. Shell G/F	1	PCS
②	CONNECTOR	HDMI A Male,The Pin Gold Plating FU",The Shell For Plating G/F Black Insulation	1	PCS
①	CABLE	UL20276 #32*5P+ #26*1C+ #32*2C+AEB AL-MG PVC OD:5.0mm	200	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

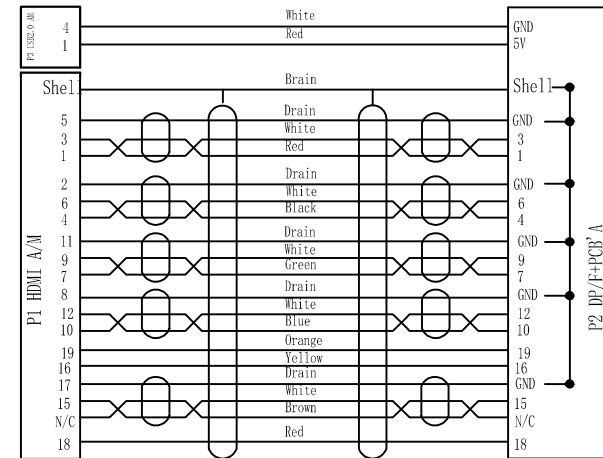

Item ref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by ACHY	Checked by NIKE	Approved by—date Sep 23rd,2020	File name HDMI/DP F+USB	Date Sep 23rd,2020	Scale FREE	
ANGLE:				HDMI/DP F+USB		
UNIT:MM						
			2052147	Edition 1	Sheet 1/1	