



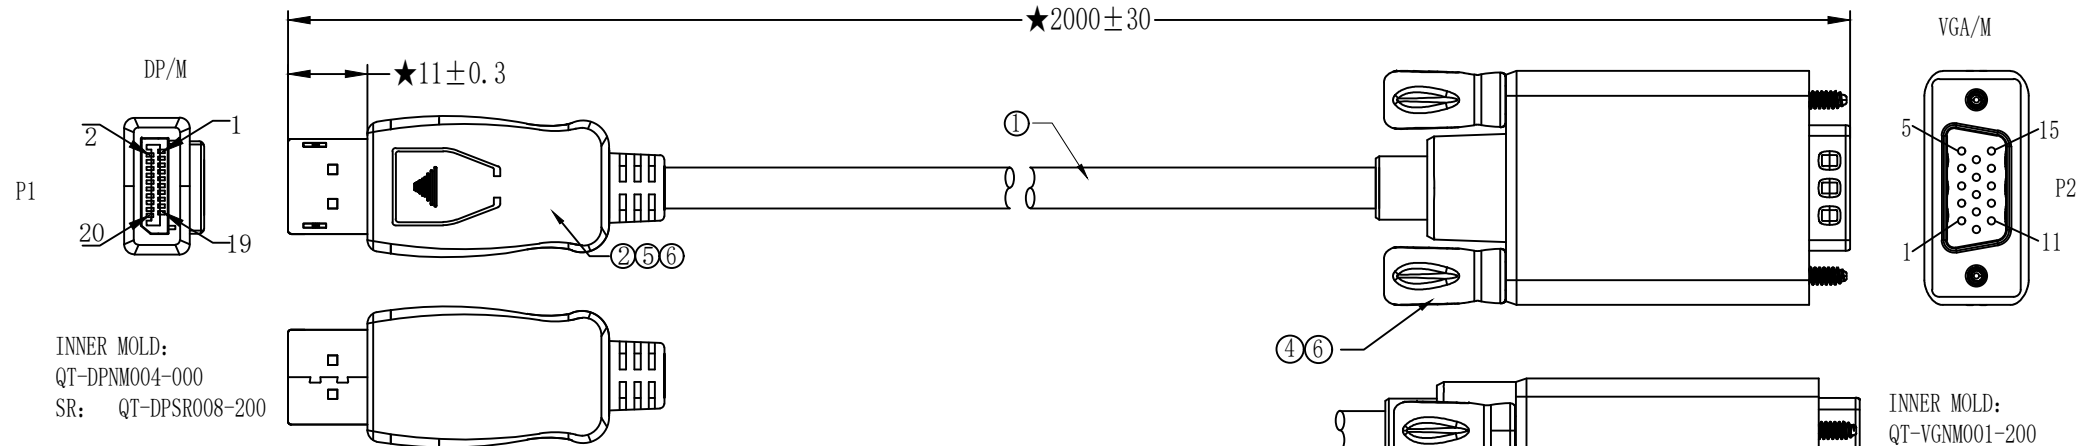


INNER MOLD:
QT-DPNM004-000
SR: QT-DPSR008-200



INNER MOLD:
QT-VGNM001-200
SR: QT-VGWM001-100

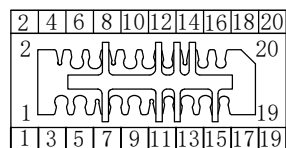

DP/M line clip drawing

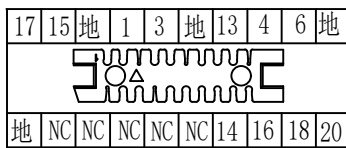

PCBA line clip drawing

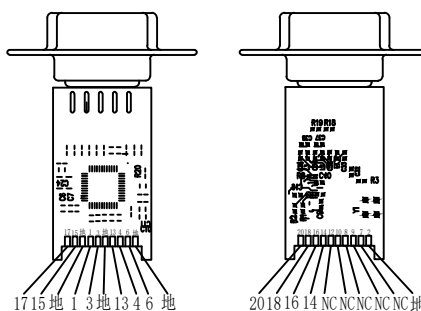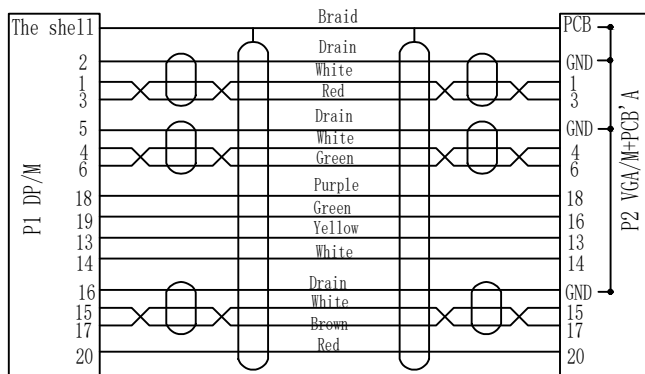

ANX9833 PLAN

(DP TO VGA real detection)

1.Signal source resolution

UXGA: 1920*1080P

2.Refresh rate : 60HZ

3.Video image without signal jitter and drag,
Double shadow, lack of color and other abnormal
display

4.No noise, clear sound.

6	OUTER MOLD	BLACK 45P PVC	A/R	
5	INNER MOLD	LD-PE:COLOR:NATURAL	A/R	
4	Screw	(self-made) Screw: 2.8 * 64mm (VGA) screw, Iron nickel plating, black glue (OD: 2.8 * L=61MM)	2	
3	PCBA	PCBA:ANX9833 Terminal G/F, Gold-plated shell, Black rubber core	1	
2	CONNECTOR	DP/M:CONTACT:G/F, INSULATION:BLACK, SHELL:AU PLATED	1	
1	CABLE	UL20276 #32*3P+#32*5C+AEB JACKET:BLACK OD:5.0mm PVC	1	
ITEM	NAME	DESCRIPTION	Q' TY	REMARK

Neklan
Stay connected!

TITLE:
DP/M TO VGA/M Gold/Gold Total length 2M
Black32#5.0 1080P(IC: ANX9833)

Customer P/N: 2052154

Product P/N:

ToL	Inch	mm	Units:	mm	Draw:	Q' TY	REMARK
X.	.02	0.5	Angle:	±°	Check:		
X.X	.12	0.3	Scale	NONE	App'd:		
X.XX	.008	0.2	第三视角		Date	2023-02-13	
X.XXX	.006	0.15	REV.	A	Sheet	1/1	
X.XXX	.006	0.15					