
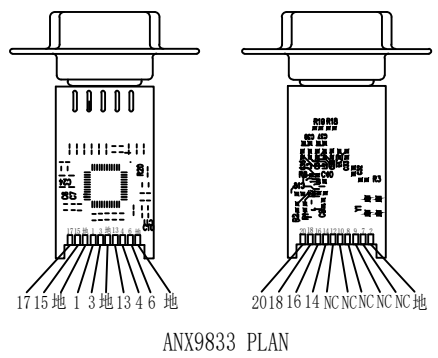
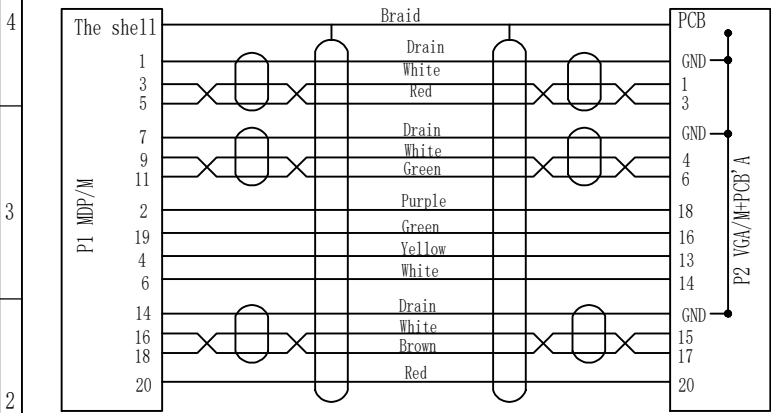
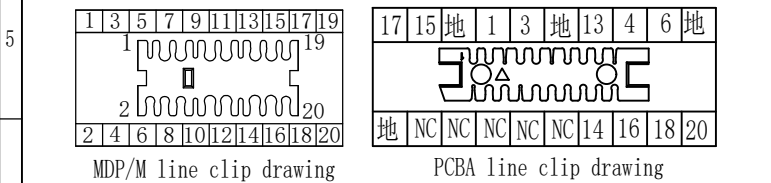


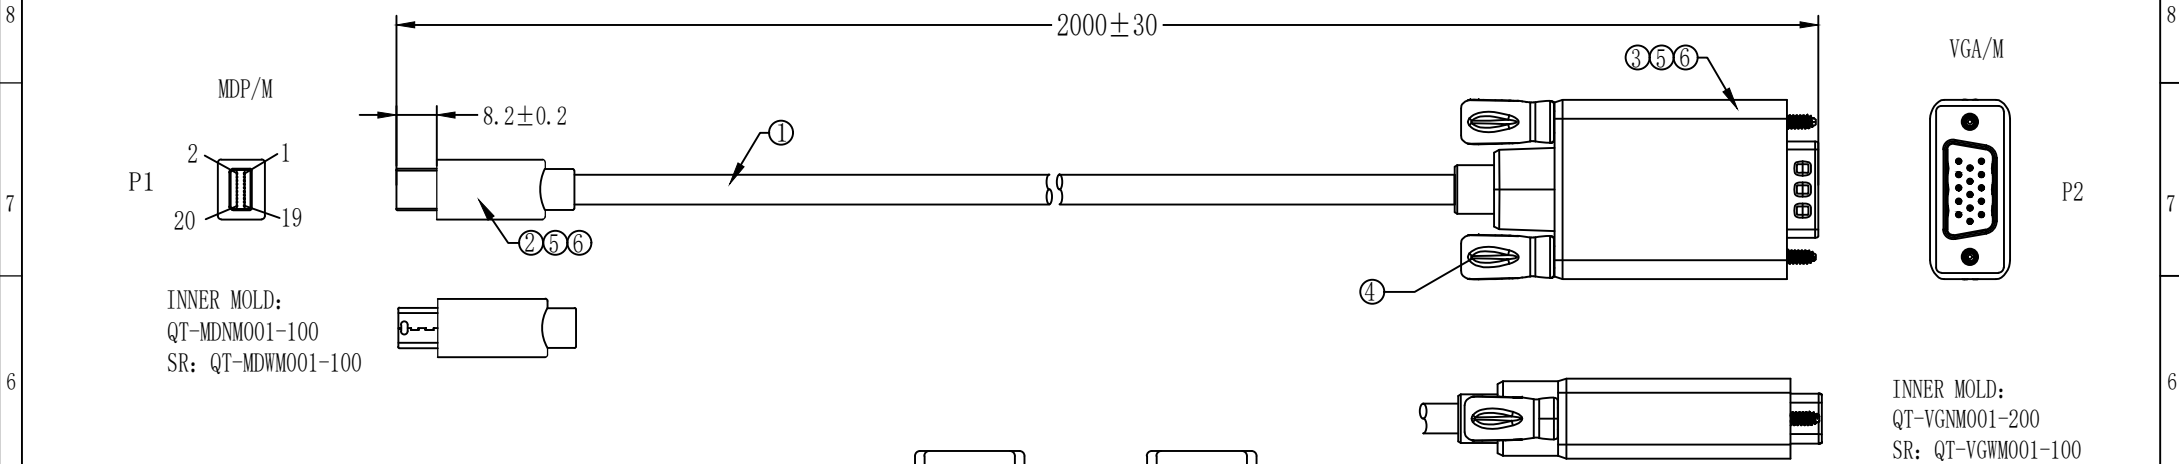


- (MDP TO VGA real detection)
- 1.Signal source resolution
UXGA: 1920*1080P
 - 2.Refresh rate : 60HZ
 - 3.Video image without signal jitter and drag,
Double shadow, lack of color and other abnormal display
 - 4.No noise, clear sound.

6	OUTER MOLD	BLACK 45P PVC	A/R	
5	INNER MOLD	LD-PE:COLOR:NATURAL	A/R	
4	Screw	(self-made) Screw: 2.8 * 64mm (VGA) screw, Iron nickel plating, black glue (OD: 2.8 * L=61MM)	2	
3	PCBA	PCBA:ANX9833 Terminal G/F, Gold-plated shell, Blue rubber core	1	
2	CONNECTOR	MDP/M: terminal G/F, Iron shell G/F, White rubber core, Solder cup with tin	1	
1	CABLE	UL20276 #32*3P+#32*5C+AEB JACKET:BLACK OD:5.0mm PVC	1	
ITEM	NAME	DESCRIPTION	Q' TY	REMARK

Neklan

Stay connected!

TITLE: MDP/M TO VGA/M Gold/Gold Total length 2M Black32#5.0 1080P(IC: ANX9833)				Tol.		Inch		mm		Units:		mm		Draw:		Ouyang			
				X.		.02		0.5		Angle:		±°		Check:					
				X.X		.12		0.3											
				X.XX		.008		0.2		Scale		NONE		App' d:					
X.XXX		.006		0.15															
Customer P/N:		2052160				X.XXX		.006		0.15		第三视角 		Date		2023-02-13			
Product P/N:						X.XXX		.006		0.15				REV.		A		Sheet	
E		F		G		H		I		J									