

Cordon HDMI 2.0 - 4Kx2K@60Hz - AWG24 - M/M

RevNo	Revision note	Date	Signature	Checked

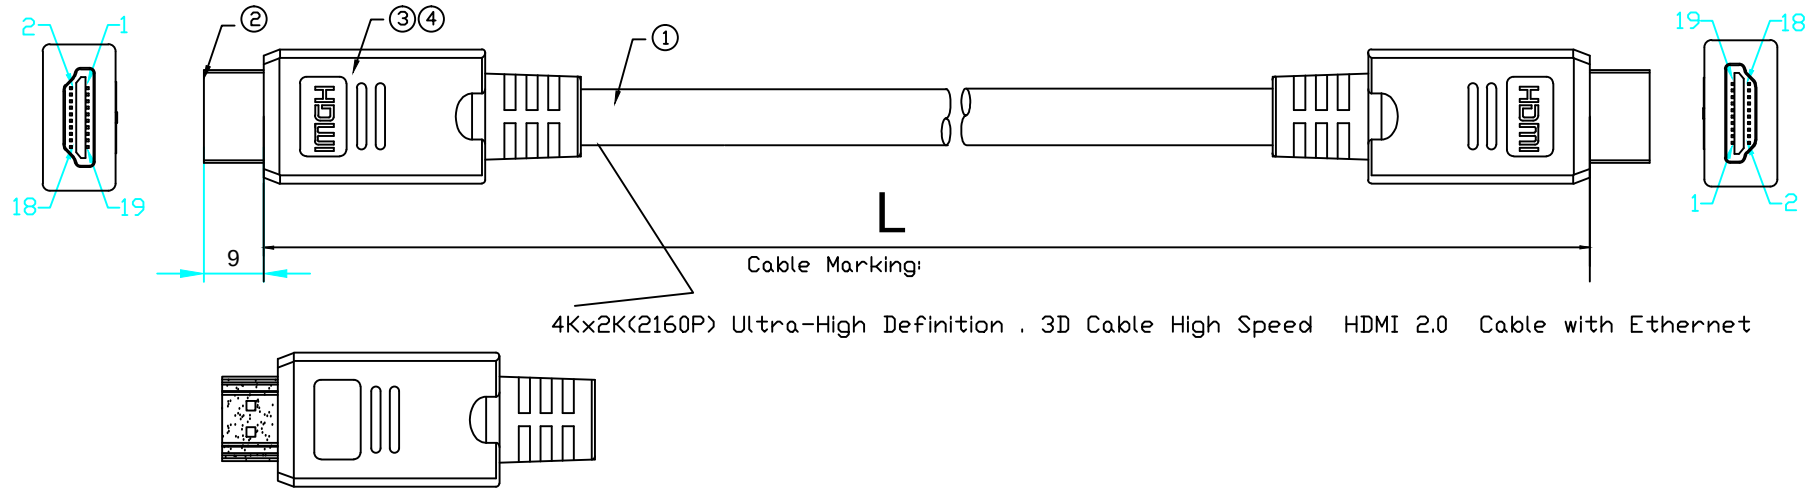

P/N	L(MM)	T(MM)
2061803	15000	±150
2061810	20000	±200

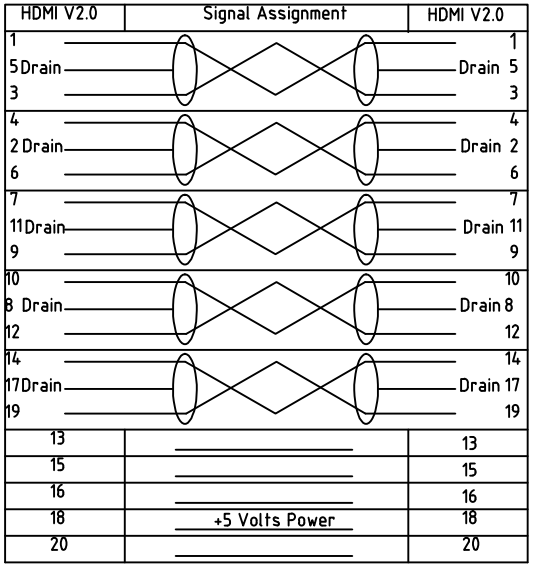

REQUIREMENTS:

1:100% short,open and miss wire test.
2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)
3:Use testing: 4Kx2K@60Hz

NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT
④	OUTER MOLDED	BLACK 45P PVC	0.040	KG
③	INTER MOLDED	LDPE	0.008	KG
②	CONNECTOR	HDMI 19PIN MALE,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING	2	PCS
①	CABLE	[1P*24AWG(1/0.404BC)+D(1/0.32mmBC)+AL/MY]*5P+ 4C*28AWG(1/0.32mmBC)*3C+1C*1/0.404mmBC+AL+D(1/0.23 mmBC)+B(16/6/0.12mmAL-MG) OD:8.5±0.15mm BLACK	L	M

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by ACHY		Checked by NIKE	Approved by - date April 9TH 2018	File name HDMI2.0 A M-M	Date April 9TH 2018	Scale FREE
ANGLE:		Neklan Stay connected !		HDMI2.0 A M/M		
UNIT:MM				20618xx	Edition 1	Sheet 1/1