



ELECTRICAL TEST:

- 1.100% OPEN SHORT MIS WIRE TEST
- 2.CONTACT RESISTANCE:5 OHM MAX
- 3.INSULATION RESISTANCE:5M OHM MIN
- 4.HI-POT TEST:DC 300V/10ms
- 5.PASS 8K@60Hz 4K@120Hz 48G TEST


Cordon HDMI 2.1 - 8K - 7680x4320@60Hz - 48Gbps - AWC30 - M/M - 0.5m

CONSUMER ITEM	LENGTH(mm)
2062026	500±20
2062033	1000±30
2062040	2000±30

P1

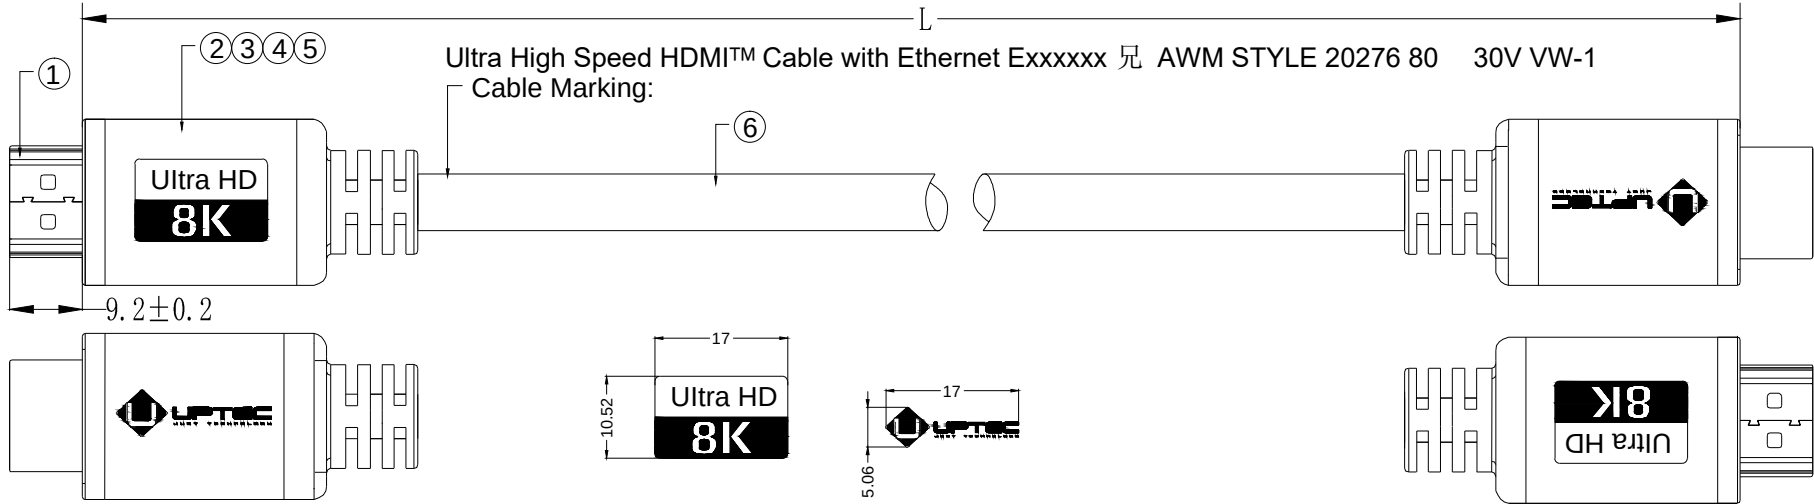

P2

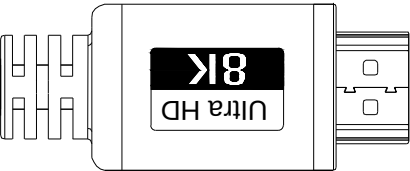


PIN Assignment

P1 HDMI AM

P2 HDMI AM

1	1
3	3
2	2
4	4
6	6
5	5
7	7
9	9
8	8
10	10
12	12
11	11
14	14
19	19
17	17
13	13
15	15
16	16
18	18
SHELL	SHELL

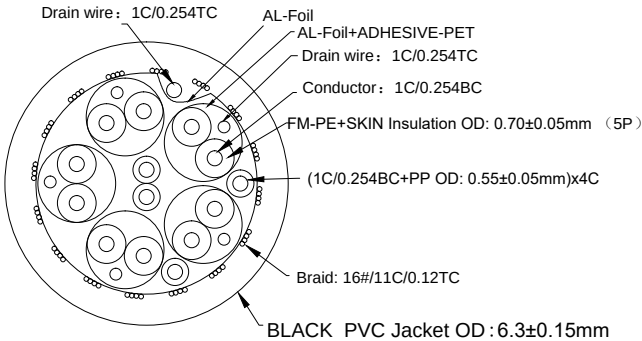

⑥	Cable	(1/0.254BC*1P+D1/0.254TC+AL-Foil+ADHESIVE-PET)*5C+1/0.254BC*4C+AL-Foil+D1/0.254TC+176#/0.12AM BLACK PVC Jacket OD:6.3±0.15mm	M
⑤	outer molding	BLACK PVC 45P	xxg
④	inner molding	PE,Nature color	xxg
③	Copper foil	Copper foil size:5mm	mm
②	SHELL	Blue aluminum shell	2PCS
①	Connector	HDMI AM 19P SHELL/PIN: Gold plated & Tinplate	2PCS
NO.	PART NAME	DESCRIPTION	UNIT

	DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
	MODEL NO.	2062026	△			
	DRAWING NO.		△			
	FINISHING		△	2021/06/25		A1
	MATERIAL		SYM	DATE		REVISION