


ELECTRICAL TEST:
1.100% OPEN SHORT MIS WIRE TEST
2.CONTACT RESISTANCE:5 OHM MAX
3.INSULATION RESISTANCE:5M OHM MIN
4.HI-POT TEST:DC 300V/10ms
5.PASS 8K@60Hz 4K@120Hz 48G TEST

Cordon HDMI 2.1 - 8K - 7680x4320@60Hz - 48Gbps - AWC30 - M/M - 2m

CONSUMER ITEM	LENGTH(mm)
2062026	500±20
2062033	1000±30
2062040	2000±30



P1

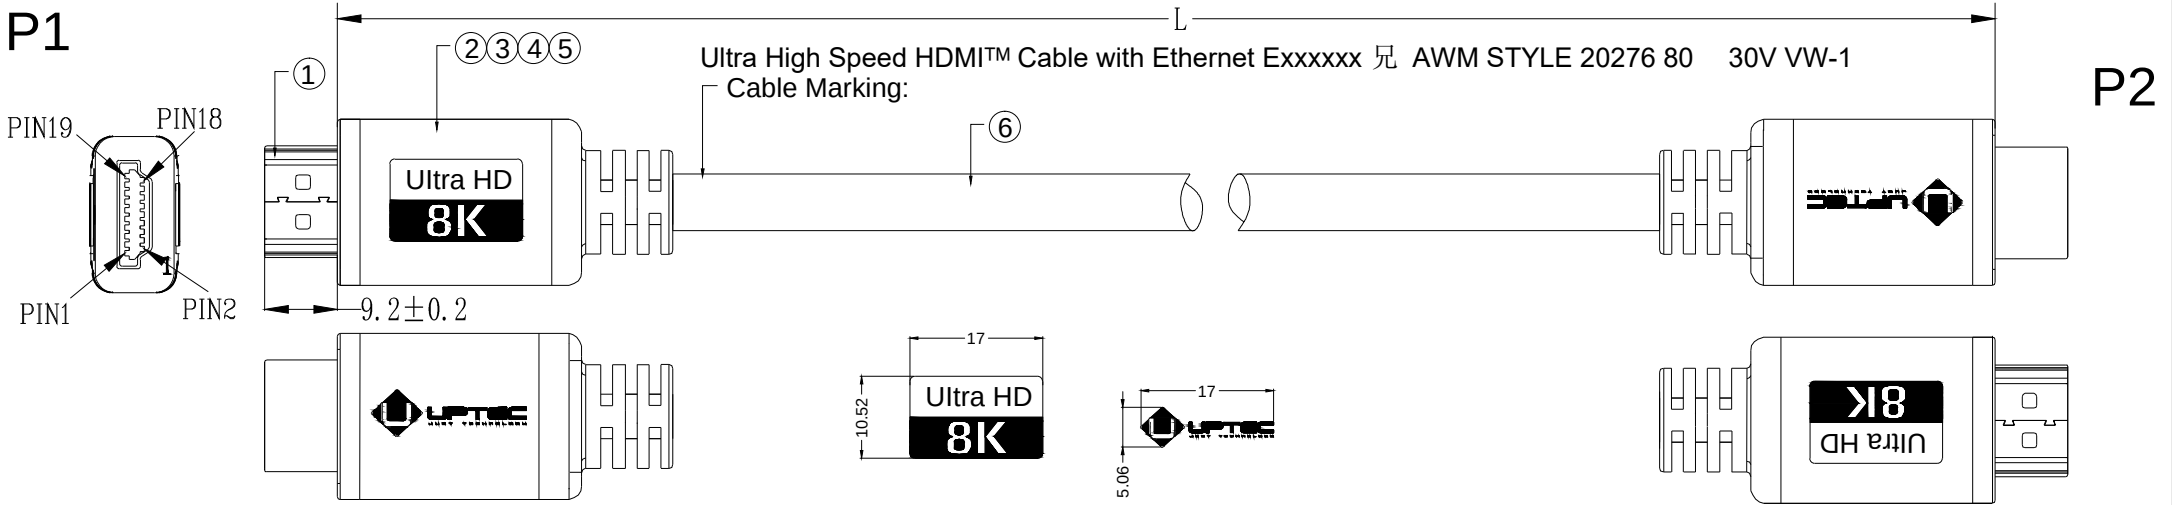

P2

PIN Assignment

P1 HDMI AM P2 HDMI AM

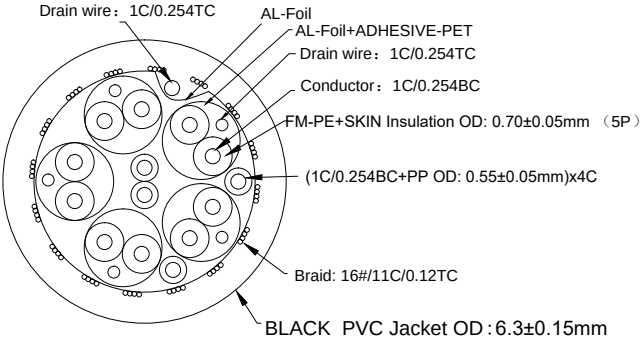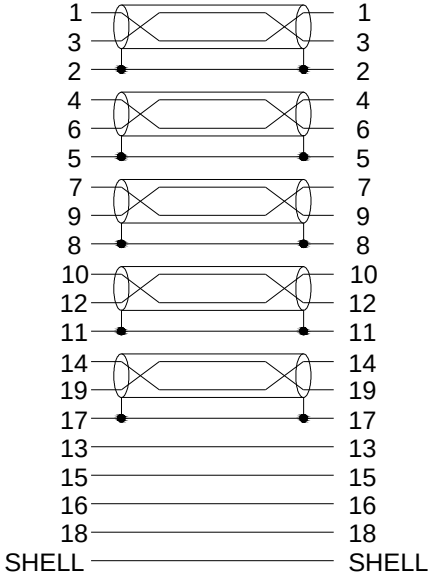

⑥	Cable	(1/0.254BC*1P+D1/0.254TC+AL-Foil+ADHESIVE-PET)*5C+1/0.254BC*4C+AL-Foil+D1/0.254TC+176#/0.12AM BLACK PVC Jacket OD:6.3±0.15mm	M
⑤	outer molding	BLACK PVC 45P	xxg
④	inner molding	PE,Nature color	xxg
③	Copper foil	Copper foil size:5mm	mm
②	SHELL	Blue aluminum shell	2PCS
①	Connector	HDMI AM 19P SHELL/PIN: Gold plated & Tinplate	2PCS
NO.	PART NAME	DESCRIPTION	UNIT

	DESCRIPTION	FINISHED PRODUCT'S FIGURE		SCALE	FIT	UNITS: MM	1RD ANGLE
	MODEL NO.	2062040		△			
	DRAWING NO.			△			
	FINISHING			△	2021/06/25		A1
	MATERIAL			SYM	DATE		REVISION