


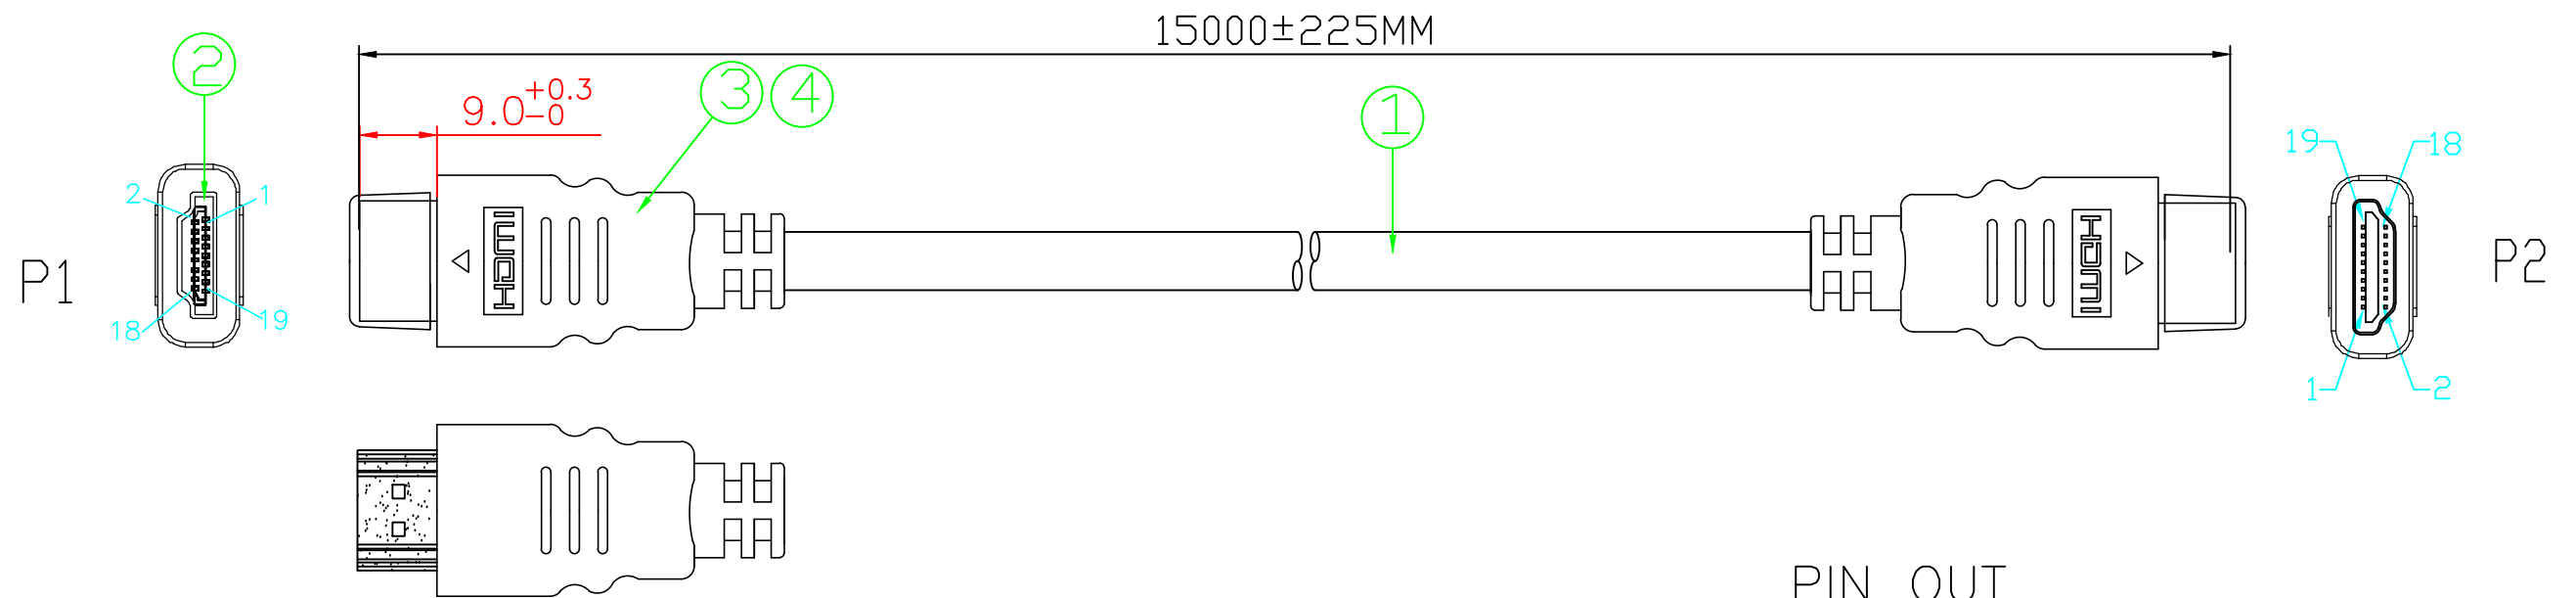

PIN OUT

[illegible]

NOTES:

- 1:100% short,open and miss wire test.
2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)
3:Support YUV 4:2:0 4KX2K@60Hz

④	OUTER MOLDED	BLACK 45P PVC	0.038	KG
③	INTER MOLDED	LDPE	0.021	KG
②	CONNECTOR	HDMI 19PIN MALE,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING	2	PCS
①	CABLE	(1/0.40CCS+ALMYLAR)*4P+(1/0.40CCS+D1/0.25CCS+ALMYLAR)*1P+1/0.25CCS*3C+1/0.40CCS*1CAL+D/0.25CCS,OD:8.0+/-0.15mm	15000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Item ref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference		
Designed by ACHY		Checked by NIKE	Approved by - date June 16TH,2023	File name HDMI AM TO AM	Date June 16TH,2023	Scale FREE	
ANGLE: 				HDMI2.0 A M/ M 26AWG			
UNIT:MM				2062124		Edition 1	Sheet 1/1