
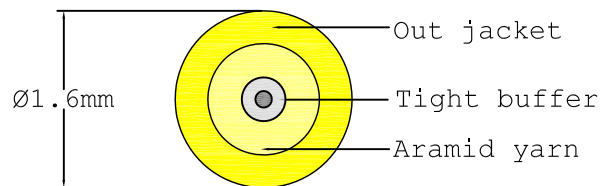


## SIMPLEX FIBER OPTIC CABLE SC/APC-SC/APC 9/125 G657A2 LSZH

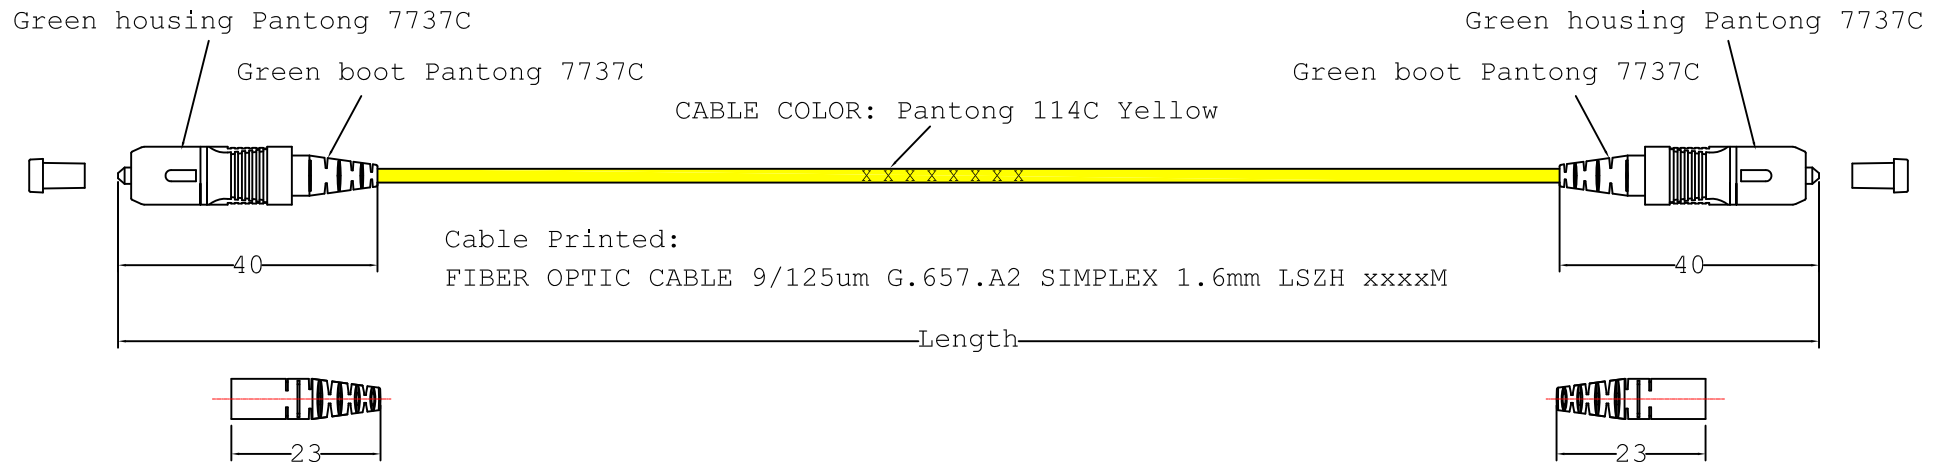

Length Tolerance:

| Length (M)      | Tolerance         |
|-----------------|-------------------|
| $L \leq 1$      | $+5\text{CM}/-0$  |
| $1 < L \leq 10$ | $+10\text{CM}/-0$ |
| $10 < L$        | $+1.1\%/-0$       |

Specifications:

|                          |                   |
|--------------------------|-------------------|
| Fiber Mode               | SM                |
| Type                     | SC/APC-SC/APC     |
| APC Angle tolerance      | $\pm 0.2^{\circ}$ |
| Cable Diameter(mm)       | $\Phi$ 1.6        |
| Cable Color              | Yellow            |
| Core Diameter(um)        | 9/125             |
| Insertion Loss(dB)       | $\leq 0.25$       |
| Typical IR(dB)           | $\leq 0.12$       |
| Return Loss(dB)          | $\geq 60$         |
| Fiber Height(nm)         | $\pm 80$ nm       |
| Random Test(dB)          | $< 0.3$           |
| Operating Temperature(℃) | -20~+70           |
| Storage Temperature(℃)   | -20~+70           |



Neklan   
*Stay connected!*

| TOLERANCE TO BE |         |       |
|-----------------|---------|-------|
| LINEAR          | ANGULAR |       |
| X.X ±0.5        | X°      | ±1°   |
| X.XX ±0.10      | X°X'    | ±30'  |
| X.XXX ±0.050    | X°X'X'' | ±15'' |

REMOVE ALL SHARP  
EDGES AND ALL BURRS

DO NOT SCALE

UNIT: MILLIMET

0 MATL:

|         |  |
|---------|--|
| FINISH: |  |
|---------|--|

|        |  |
|--------|--|
| REF. : |  |
|--------|--|

|       |    |
|-------|----|
| DRAW: | WR |
|-------|----|

|            |
|------------|
| CKECK: 7.0 |
|------------|

APPR: L.M.T.

DATE: 2020.06.11

DATE: 2020.06.11

DATE: 2020.06.11

|  |              |
|--|--------------|
|  | DESCRIPTION: |
|--|--------------|

Jumper, SC/APC-SC/APC

Simplex 9/125 G657A2 LSZH

10F1

THIRD ANGLE  
PROJECTION

SCALE: 1:1

PART No:1SCSC20061101

|   |        |
|---|--------|
| 1 | SIZE:B |
|---|--------|

A4