
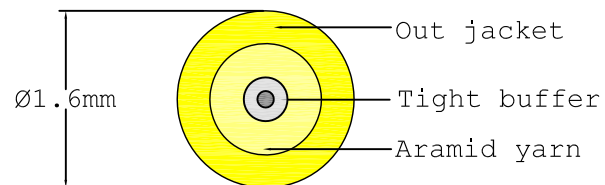


SIMPLEX FIBER OPTIC CABLE SC/APC-SC/APC 9/125 G657A2 LSZH

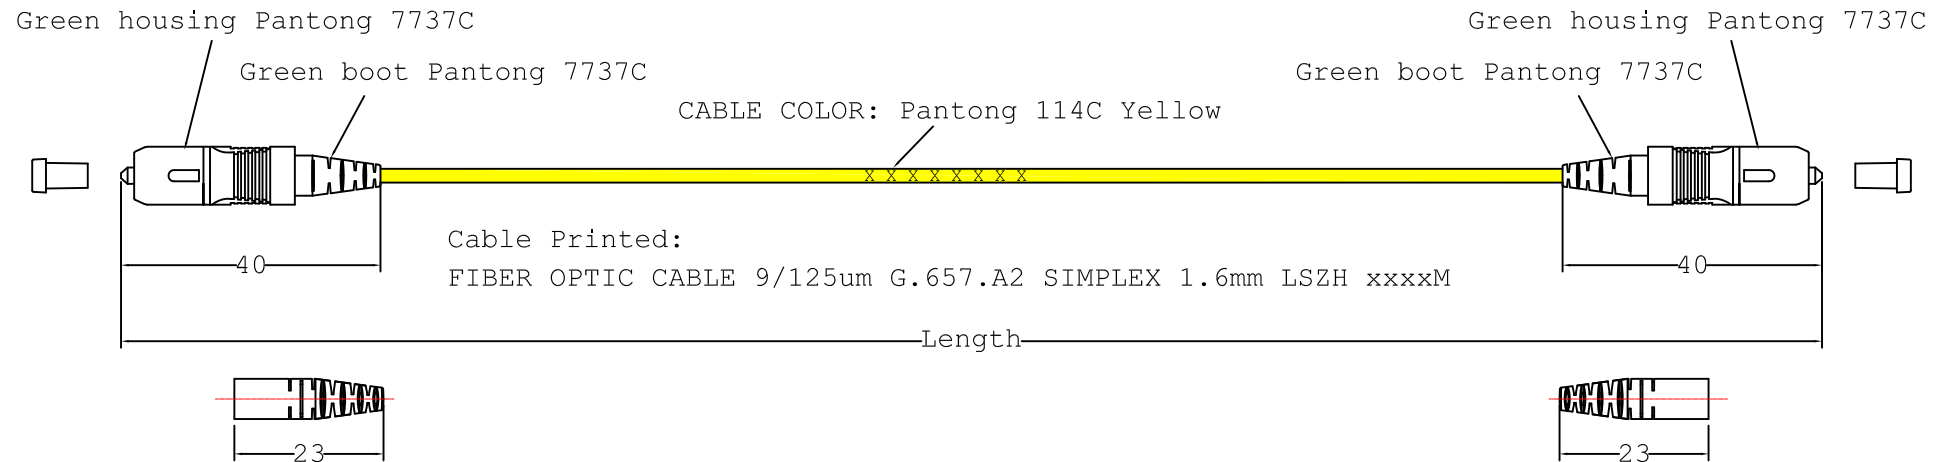

Length Tolerance:

Length(M)	Tolerance
L≤1	+5CM/-0
1<L≤10	+10CM/-0
10<L	+L1%/-0

Specifications:

Fiber Mode	SM
Type	SC/APC-SC/APC
APC Angle tolerance	±0.2°
Cable Diameter(mm)	Φ 1.6
Cable Color	Yellow
Core Diameter(um)	9/125
Insertion Loss(dB)	≤0.25
Typical IR(dB)	≤0.12
Return Loss(dB)	≥60
Fiber Height(nm)	±80nm
Random Test(dB)	<0.3
Operating Temperature(°C)	-20~+70
Storage Temperature(°C)	-20~+70

Neklan
Stay connected!



UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE			
LINEAR		ANGULAR	
X.X	±0.5	X°	±1°
X.XX	±0.10	X°X'	±30
X.XXX	±0.050	X°X'X''	±15
REMOVE ALL SHARP EDGES AND ALL BURRS			
DO NOT SCALE			
UNIT: MILLIMETERS			

MATL:	DRAW: WR	DATE: 2020.06.11
FINISH:	CHECK: ZQ	DATE: 2020.06.11
REF.:	APPR: LML	DATE: 2020.06.11
THIRD ANGLE PROJECTION		

SCALE: 1:1

PART No: 1SCSC20061101

SIZE: B

A4

AP01	NEW REVISION	****	2020.06.11	ECN-#
A	FIRST REVISION	****	2020.06.11	ECN-#
REV.	DESCRIPTION	APVD	DATE	ECN No
	DESCRIPTION: Jumper, SC/APC-SC/APC Simplex 9/125 G657A2 LSZH			10F1