


RoHS compliant

REV	MODIFICATION	DATE
A	ISSUE	2020.08.07


Adaptateur USB3.1 Type C Mâle vers USB 3.0 Type A Femelle - 0.2 m

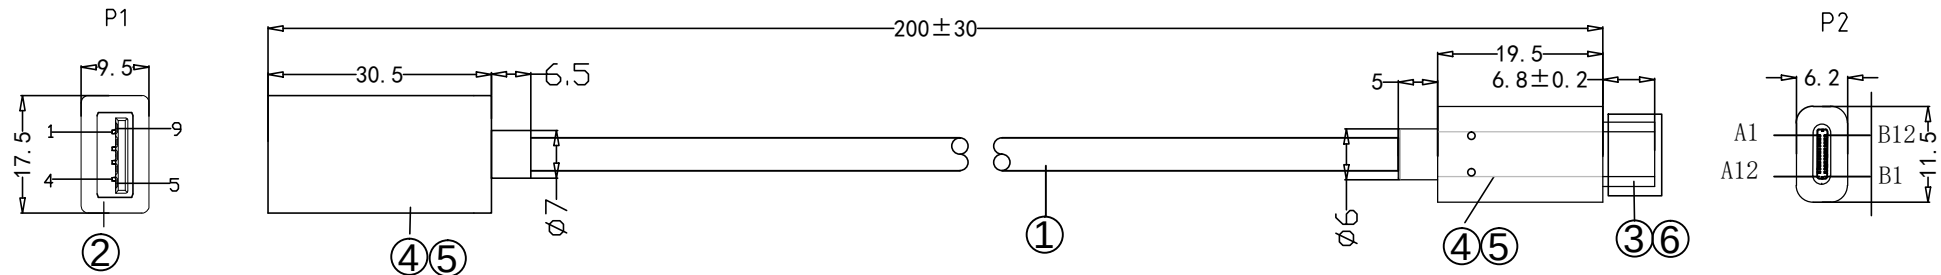

Electronics Test:

- (1).OPEN/SHORT/INTERMITTENCE: 100%.
- (2).CONDUCTIVE RESISTANCE:5 OHM (MAX)
- (3).Support USB 3.0 Read Write Speed:READ 120MB/S (MIN), WRITE 120MB/S (min);

PIN OUT

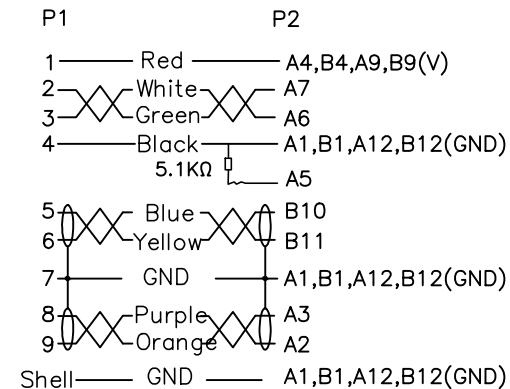

⑤	Dust Cap	TYPE 3.1 Dust Cap	2	PCS
⑤	MOLDED	45P Black PVC	13	G
④	MOLDED	LDPE	5	G
③	CONNECTOR	USB3.1 C TYPE Gold Flash Pin, Stretched iron shell nickel plating + PCB board down pull 5.1KΩ	1	PCS
②	CONNECTOR	USB3.0 AF Gold Flash Pin, Blue INSULATION,nickel plating Shell	1	PCS
①	CABLE	[30#(7/0.10TC)*1P+D(7/0.10TC)+ALMY]*2P+24#(7/0.2TC)*2C+30#(7/0.10TC)*1P+AL+D(1/0.254BC)+B(64/0.12LMS) Black PVC Jacket OD:4.5±0.2MM Cable Marking: HIGH SPEED USB3.0 CABLE E*****兄 AWM STYLE 20276 80° C 30V VW-1	200	MM
NO	NAME		Q'TY	UNIT

Itemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by ACHY		Checked by NIKE	Approved by – date Aug 7th,2020	File name UTP CAT.6	Date Aug 7th,2020	Scale FREE
ANGLE: 				Adapter USB 3.1 M / USB3.0 A F		
UNIT:MM						
				2090687	Edition 1	Sheet 1/1