




| 目录 DIRECTORY | 设变内容 MODIFICATION | 日期 DATE | 修改人 DRAW | 核准 APPROVE |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |

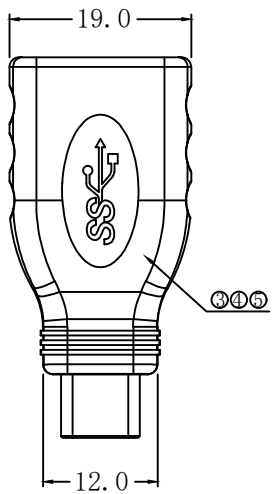





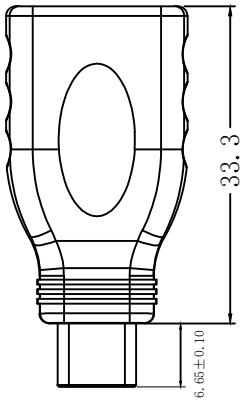

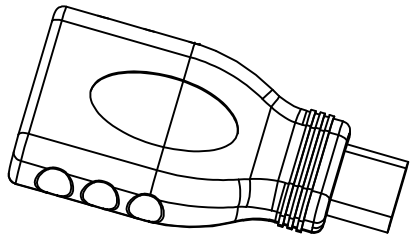

PIN OUT



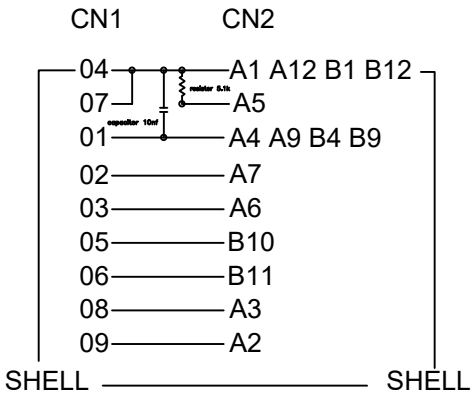
Note:

1. 100% short/open circuit & miswire test conditions.
2. Support power supply, data transmission, OTG function.
3. The product is connected by PCB board.

| No | Name | Description | Material No | Q'ty |
|---|---|---|---|---|
| 5 | Outer Mold | PVC Black | USB-13 | 4.8G |
| 4 | Inner Mold | PE | USB-14 | 2.6G |
| 3 | PCB | PCB T=0.8MM 1* resistor 5.1k 1* capacitor 10nf | JH-001 | 1PCS |
| 2 | Connector | USB 3.1 C TYPE MALE Pearl nickel plated steel shell PIN Gold Plated | DT07015 | 1PCS |
| 1 | Connector | USB 3.0 AF Nickel Plated Iron Shell PIN Gold Plated Blue Insulation | DT06011 | 1PCS |

# 成品图
MANUFACTURE DWG

Neklan
Stay connected!

公差一览表
TOLERANCE UNLESS OTHERWISE

| | | | |
|---|---|---|---|
| X. | ±0.30 | X° . | ±5° |
| .X | ±0.20 | .X° | ±2° |
| .XX | ±0.08 | .XX° | ±1° |
| .XXX | ±0.03 | .XXX° | ±0.5° |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 单位 UNITS | mm | 制图 DRAWING | | 客户料号 CUSTOMER PART NO. | 2090953 | | |
| 比例 SCALE | 1:1 | 审核 CHKD | | 产品名称 DWG NO. | Metal USB 3.1 Type C male to USB 3.0 A Female Adapter | | |
| 日期 DATE | 2016.09.17 | 核准 APPD | | 产品编号 PRODUCT NO. | | | |
| 角法 VIEW | | 版本 VER | A0 | 工程图号 MODEL | | 张数 SHEET | 1/1 |