

RoHS&REACH compliant

REV	MODIFICATION	DATE
A	ISSUE	2021.2.26

Rallonge amplifiée USB 3.0 A-A M/F - 10m

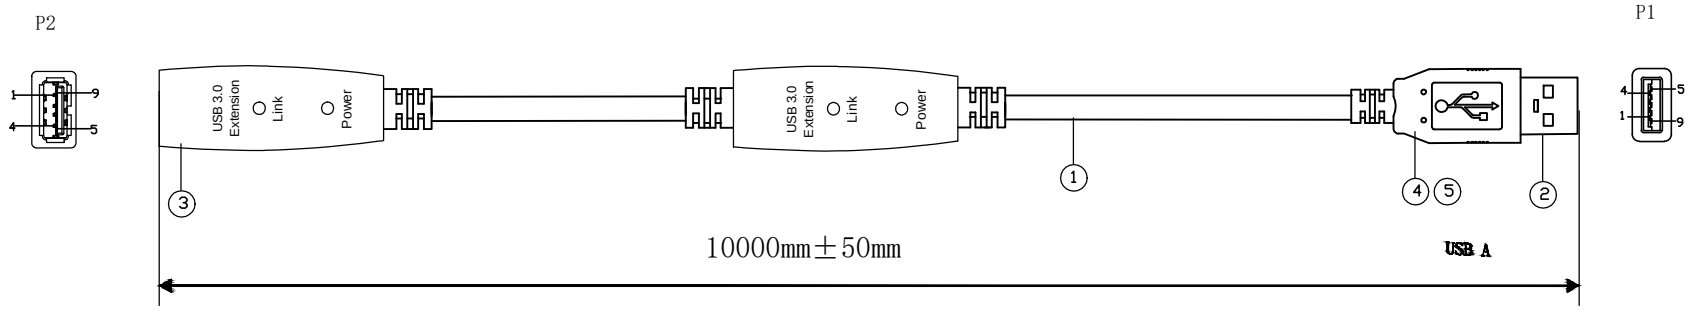

PIN OUT

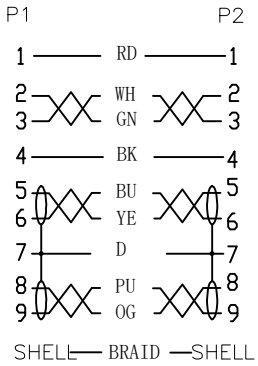

ELECTRONIC TEST:

A.OPEN/SHORT/INTERMITTENCE: 100%.

B.HI-POT: AC 150V 0.01S

C.INSULATION RESISTANCE:DC200V 0.01S 10MΩ(MIN)

D.CONDUCTIVE RESISTANCE:5 OHM (MAX)

NO	NAME	SPECIFICATIONS	Q'TY	UNIT
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	USB3.0 A F Blue Insluation PIN G/F Nickel Plated	1	PCS
②	CONNECTOR	USB3.0 A M Blue Insluation PIN G/F Nickel Plated	1	PCS
①	CABLE	USB3.0 CABLE [(7/0.127TC*1P+D7/0.12TC+AL+MYALR)*2C+7/0.12TC*1P+7/0.20*2C+AL-FOIL+D(1/0.254BC)+B(80/0.12CCAM)]BLACK PVC JACKET,OD;ø5.5±0.2MM	10000	MM

Item ref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by ACHY		Checked by NIKE	Approved by - date Feb 26th,2021	File name USB3.0 A M/B M	Date Feb 26th,2021	Scale FREE
ANGLE:		Neklan Stay connected!		USB3.0 A Male/A Female		
UNIT:MM				2090983	Edition	Sheet