


REV	DESCRIPTION	SIGNATURE	DATE
A0	ORIGIN	Flynn	2021. 12. 24

TABLE A

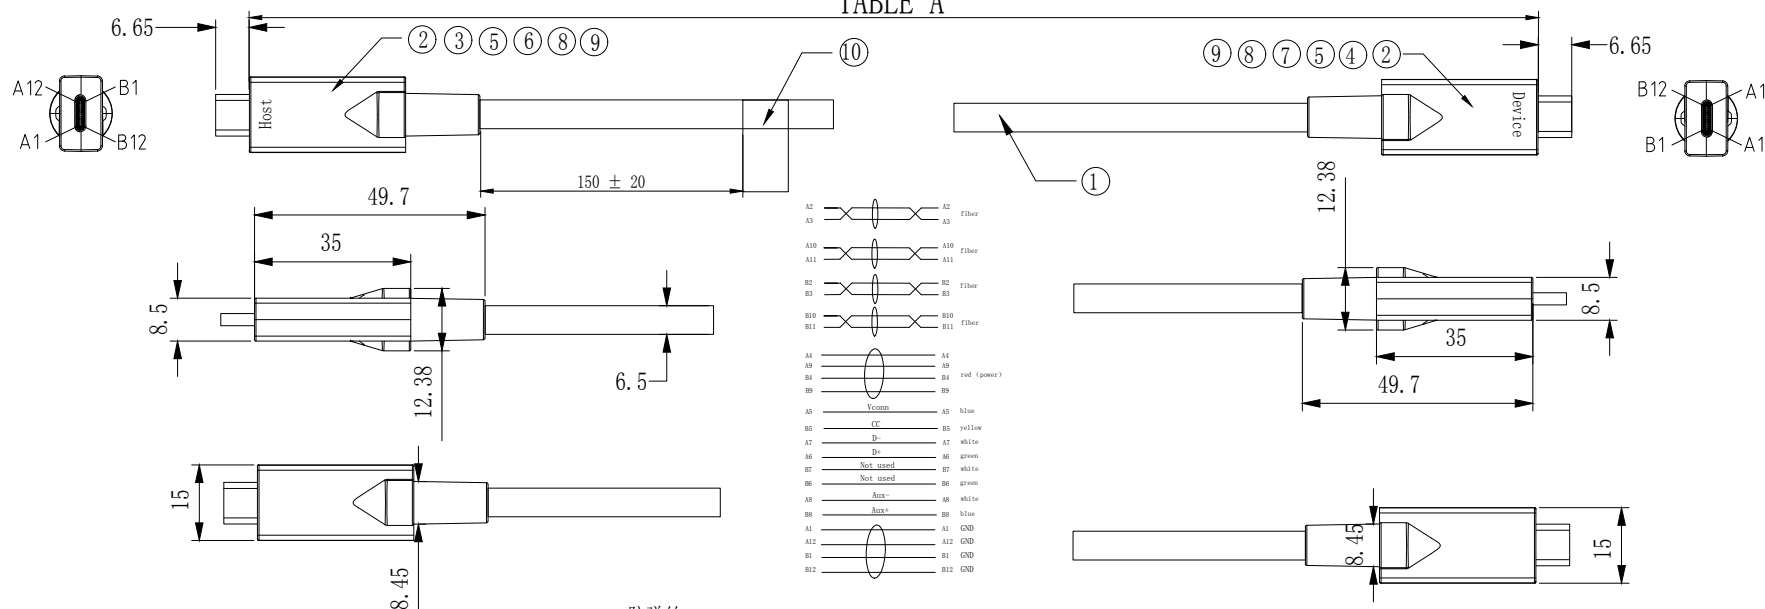

- Note:
1. Support DP 2 lane 4K@30Hz video transmission ;
 2. Support USB 3.1 Gen 2 10Gbps Data transmission ;
 3. Backwards USB 2.0 & USB 1.1 ;
 4. Support PD 60W (20V 3A) Power Delivery

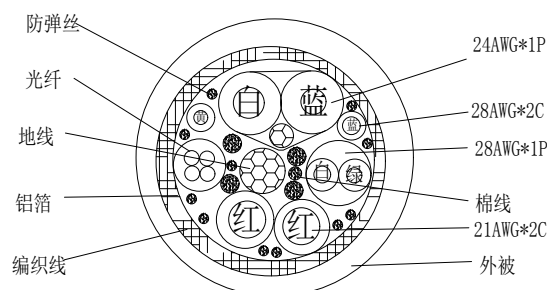


TABLE A

P/N	Customer P/N:	Length (mm)
SCFC-3120-003		3000+/-50
SCFC-3120-005		5000+/-100
SCFC-3120-010		1000+/-200

10	QR code	1	PCS
9	Screw	4	PCS
8	SR black	2	PCS
7	USB Type C A male shell (Upper) Black (Device)	1	PCS
6	USB Type C A male shell (Bottom) Black (Host)	1	PCS
5	USB Type C A male shell (Bottom) Black	2	PCS
4	USB Type C PCBA (Device)	1	PCS
3	USB Type C PCBA (Host)	1	PCS
2	USB Type C A male Gold-Plated	2	PCS
1	(24AWG*1P+D+AL+HM)*1+28AWG*1P+21AWG*2C+28AWG*2C+光纤+D+AL+B UL-TPE OD 6.5mm	TABLE A	mm
ITEM		Q' TY	UNIT



TOLERANCES UNLESS OTHERWISE STATED	
X.	= ± 1
X.X	= ± 0.25
X.XX	= ± 0.1
TOOLING DECIMALS ANGLES	
X.	±0.3 ± 1°
X.X	±0.2 ± 0.5°
X.XX	±0.1 ± 0.5°

CUSTOMER P/N:		
TYPE: Full-featured Type C ACTIVE OPTICAL CABLE		
DRAW: Flynn	PAPT NO: SCFC-3120xxx-LUX011	
CKD:Sun Jun	CUSTOMER:	UNIT:mm
APP:Tao WenGuang	DWG NO:D0211224-0928	REV:A0
SHELL:1/1	DATE:2021. 12. 24	