

RoHS compliant

| REV | MODIFICATION | DATE |
|---|---|---|
| A | ISSUE | 2021.02.20 |

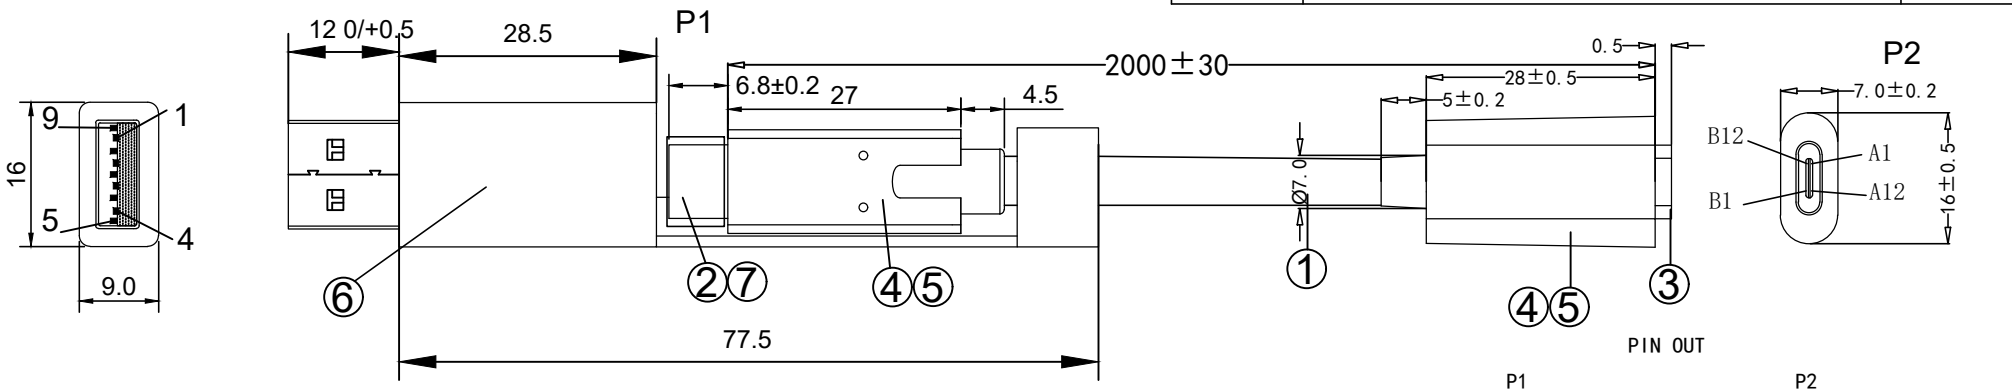


PIN OUT

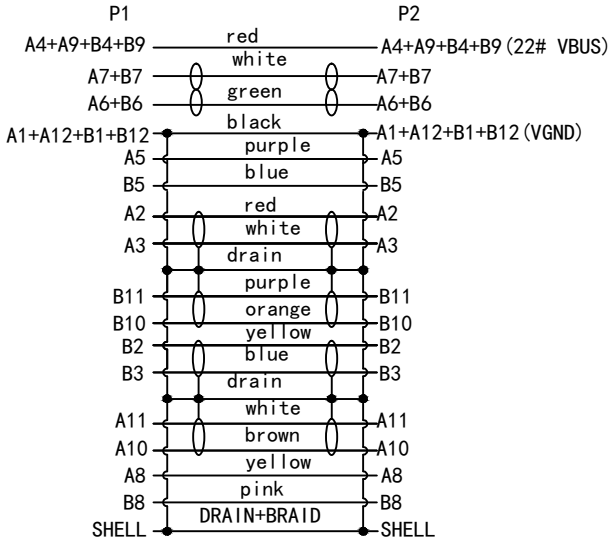


Electrical properties:

1. Wire sequence test 100%
2. Type C male to female read/write above 450MB/S
3. Connect the conversion head to test double-sided read/write above 300MB/S

| NO | NAME | | Q'TY | UNIT |
|---|---|---|---|---|
| ⑦ | DUST COVER | USB3.1 M DUST COVER | 1 | PCS |
| ⑥ | ADAPTER | USB3.0 A MALE TO Type C Female (Double side USB3.0) | 40 | MM |
| ⑤ | MOLDED | 45P Black PVC | 5 | G |
| ④ | MOLDED | LDPE | 5 | G |
| ③ | CONNECTOR | USB3.1 C TYPE F, Pin Gold Plated, Nickel Plated Shell | 1 | PCS |
| ② | CONNECTOR | USB3.1 C TYPE M , Pin Gold Plated, Nickel Plated Shell | 1 | PCS |
| ① | CABLE | USB3.2CABLE[1P*32#(7/0.08TC)+D+AL+MY] *4C+1P*32#(7/0.08TC)+4C*32#(7/0.08TC) +2C*22#(41/0.10TC)+F+AL+B(16*9/0.08TC) Black PVC OD:4.5±0.15MM(10041165) Cable Marking：E****** 兄 AWM STYLE 2725 80℃ 30V VW-1 SUPER HIGH SPEED USB Revision3.2 | 2000 | MM |

| | | | |
|---|---|---|---|
| 角 法 PROJ： | 容忍公差 TOLERANCE： | XX= XXX= | 产品名称 PRODUCT NAME： |
| 比 例 SCALE： | NONE | 版 本 REV： | A | 产品料号 PART NO： | 2091025 |
| 单 位 UNIT： | MM | 页 次 SHEET： | 1/3 | 客 户 CUST： | |
| 客户回签 SUST APPROVED： | | | | | |
| 核 准 APPROVED： | | | | | |
| 审 核 CHECKED： | | | | | |
| 制 图 DRAWING： | YUCHENGSHI 2021.02.20 | | | | |

Neklan
Stay connected!