


| REV | DESCRIPTION | SIGNATURE | DATE         |
|-----|-------------|-----------|--------------|
| A0  | ORIGIN      | Flynn     | 2021. 05. 28 |

TABLE A

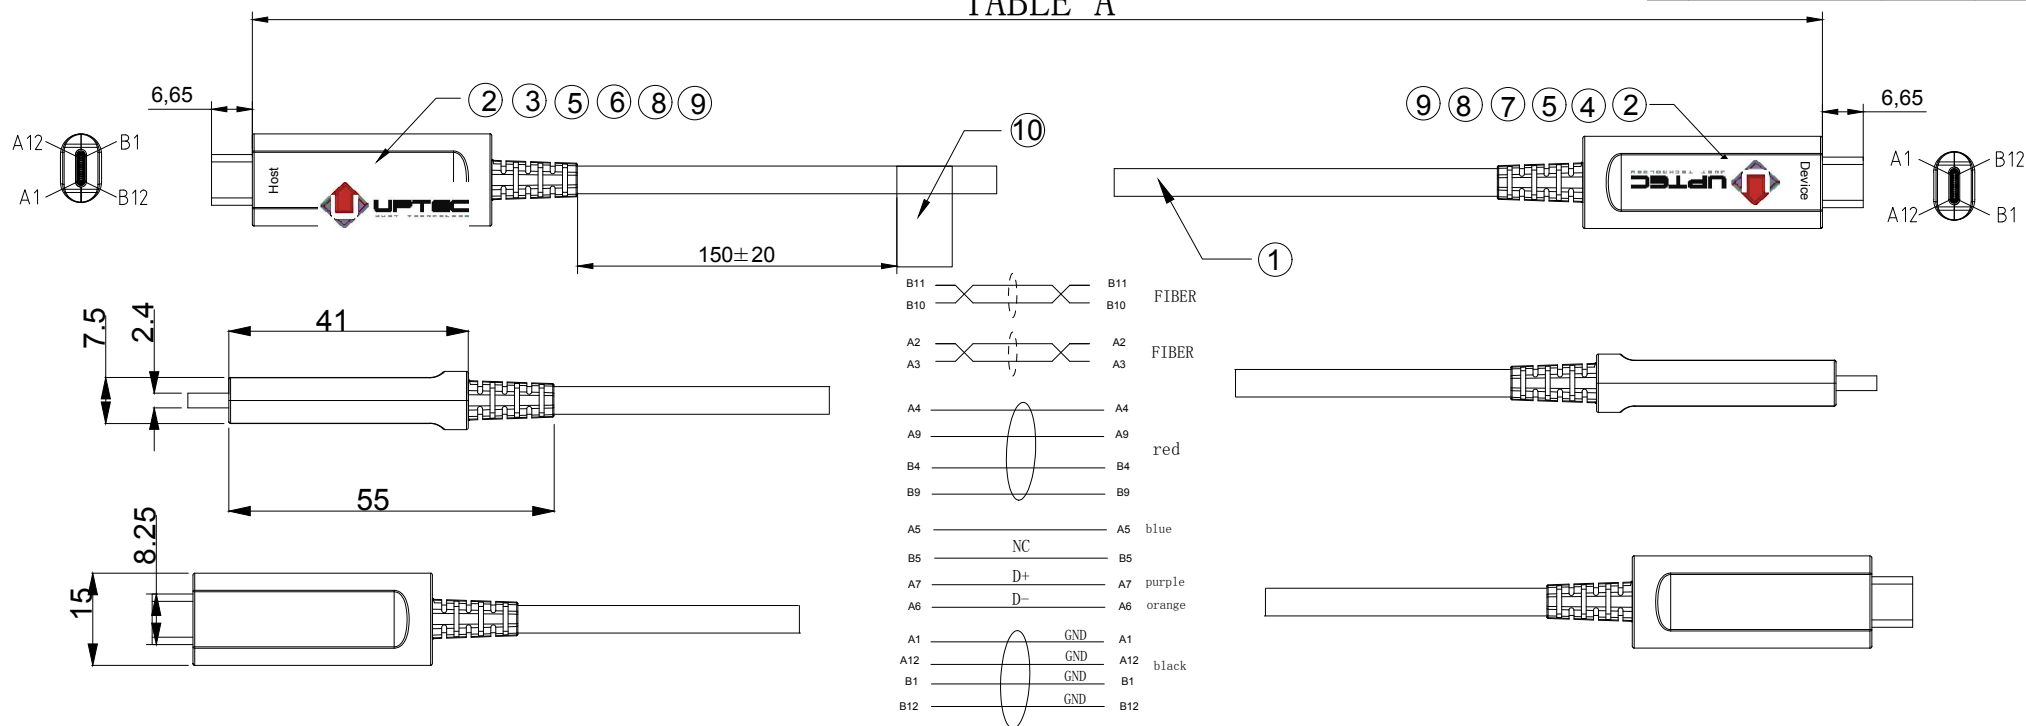

NOTES:

Support 15M  
Data Transmission Version  
Support 10Gbps  
Support downward compatible with USB 2.0/1.1

TABLE A

| P/N           | Customer P/N: | Length (mm) |
|---------------|---------------|-------------|
| SCDC-3120-005 |               | 5000+/-100  |
| SCDC-3120-010 |               | 10000+/-200 |
| SCDC-3120-015 |               | 15000+/-250 |

|      |                                                |         |            |
|------|------------------------------------------------|---------|------------|
| 10   | QR code                                        | 1       | PCS        |
| 9    | Screw                                          | 4       | PCS        |
| 8    | SR black                                       | 2       | PCS        |
| 7    | USB Type C A male shell(Upper)Black(Display)   | 1       | PCS        |
| 6    | USB Type C A male shell(Bottom)Black(Source)   | 1       | PCS        |
| 5    | USB Type C A male shell(Bottom) Black          | 2       | PCS        |
| 4    | USB Type C PCBA (Display)                      | 1       | PCS        |
| 3    | USB Type C PCBA(Source)                        | 1       | PCS        |
| 2    | USB Type C A male Gold-Plated                  | 2       | PCS        |
| 1    | USB C AOC (4 Fiber+4 Copper) Black PVC OD4.5MM | TABLE A | mm         |
| ITEM | SPECIFICATIONS                                 |         | Q' TY UNIT |

|                                    |             |
|------------------------------------|-------------|
| TOLERANCES UNLESS OTHERWISE STATED |             |
| X.                                 | = ± 1       |
| X.X                                | = ± 0.25    |
| X.XX                               | = ± 0.1     |
| TOOLING DECIMALS ANGLES            |             |
| X.                                 | ±0.3 ± 1°   |
| X.X                                | ±0.2 ± 0.5° |
| X.XX                               | ±0.1 ± 0.5° |



|                                   |                                                                                       |                   |
|-----------------------------------|---------------------------------------------------------------------------------------|-------------------|
| CUSTOMER P/N:                     |                                                                                       |                   |
| TYPE: Type C ACTIVE OPTICAL CABLE |                                                                                       |                   |
| DRAW: Flynn                       | PAPT NO:SCDC-3120-xxx-027                                                             |                   |
| CKD:Sun Jun                       | CUSTOMER:                                                                             | UNIT:mm           |
| APP:Tao WenGuang                  | DWG NO:D0210528-0642                                                                  | REV:A0            |
| SHELL:1/1                         |  | DATE:2021. 05. 28 |