

LTR	REV.	DESCRIPTION	DATE	APP'D

RoHS-COMPLIANT

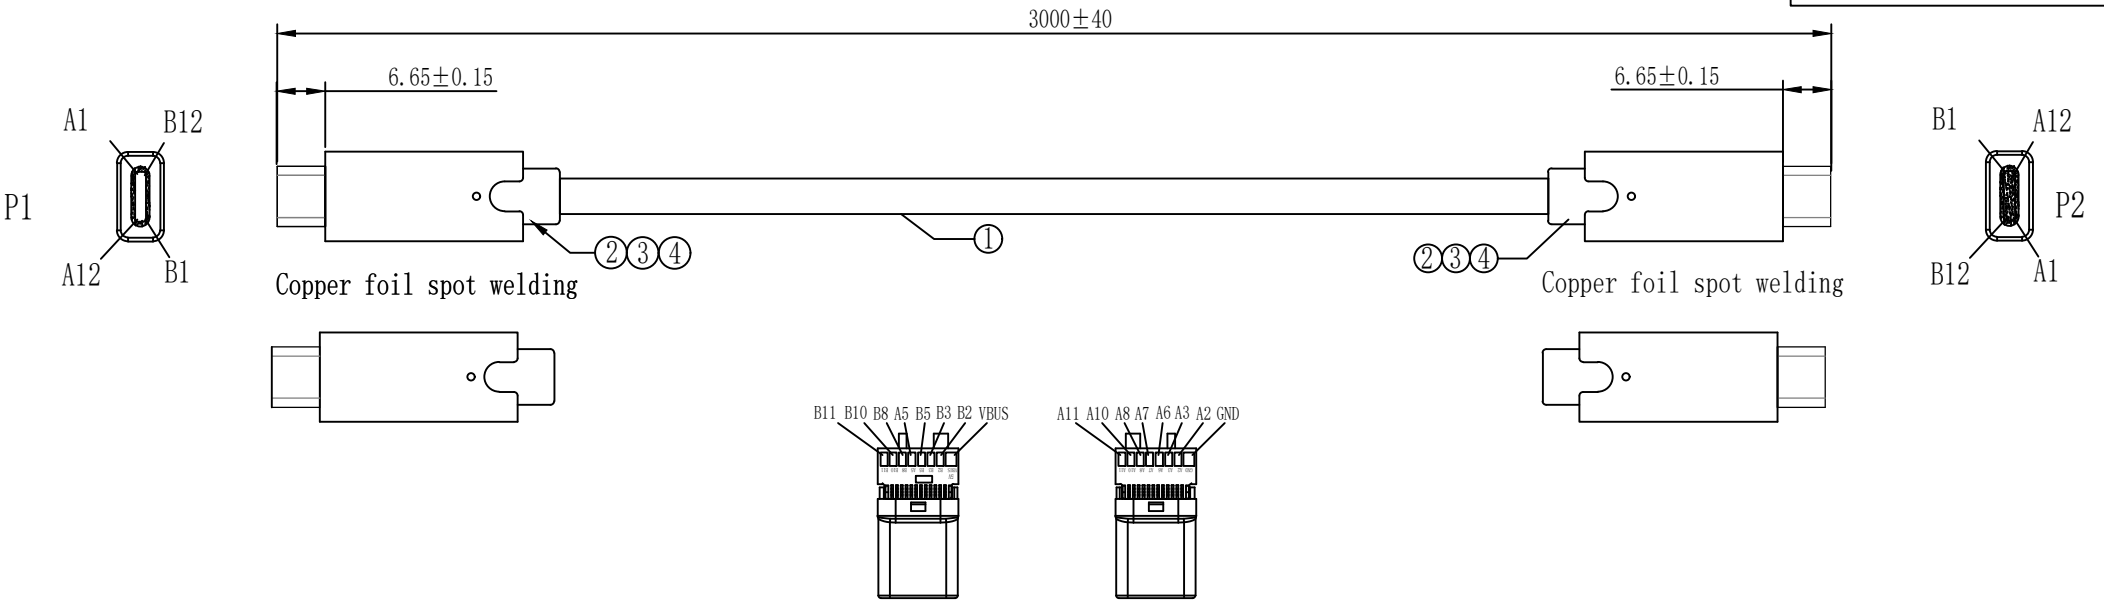

Pin Assignment

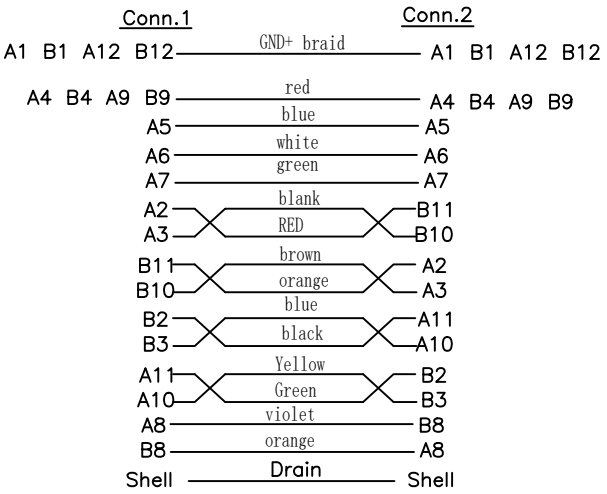

Electrical Test:
4 I 1.100% TEST OPEN SHORT MIS-WIRE.
2. CONTACT RESISTANCE:311 MAX.
3. INSULATION RESISTANCE:5Mr1 MIN.
4. HI-POT:300V DC/1 OMS.

Real machine test
a、 Max. Datenubertragungsrate: 5 Gbit/s
b、Nennspannung: 20V
c、Max Stromstarke:3A
b. Support charging function.

ITEM	NAME	DESCRIPTION	Q'TY	REMARK
4	OUTER MOLD	BLACK 45P PVC	A/R	
3	INNER MOLD	LD-PE:COLOR:NATURAL	A/R	
2	CONNECTOR	TYPE C/M clip PCB terminal G/F, gold plated iron case (stretched), vinyl core	2	
1	CABLE	USB3.1 (#32*1P+D+AL+MY)*4C+#32*4C+#32*1P+#24*2C+AB, BLACK PVC JACKET, OD:4.6mm	0.39	

Neklan
Stay connected!

TITLE:
TYPE C/M TO TYPE C/M L=3M Black 4.6MM

Customer P/N: 2091060

Product P/N:

Tol.	Inch	mm	Units:	mm	Draw:	ZHOU PENG
X.	.02	0.5	Angle:	±°	Check:	
X.X	.12	0.3	Scale	NONE	App'd:	
X.XX	.008	0.2	Third Angle Projection		Date	2022-12-28
X.XXX	.006	0.15			REV.	A Sheet 1/1