




- 1. Output: 9 French Socket + Power Indicator lamp
- 2. Input: European 3Pin angled 3G*1.5mm² 3m
- 3. Internal; one-piece copper bar
- 4. Carrier; 1U Silver environmental protection spray
- 5. T15 aluminum alloy profile
- 6. Installation;non-standard vertical vertical installation size PC flame-retardant panel + ordinary 360-degree installation board
- Power; Max Support 4000W 16A 250AC

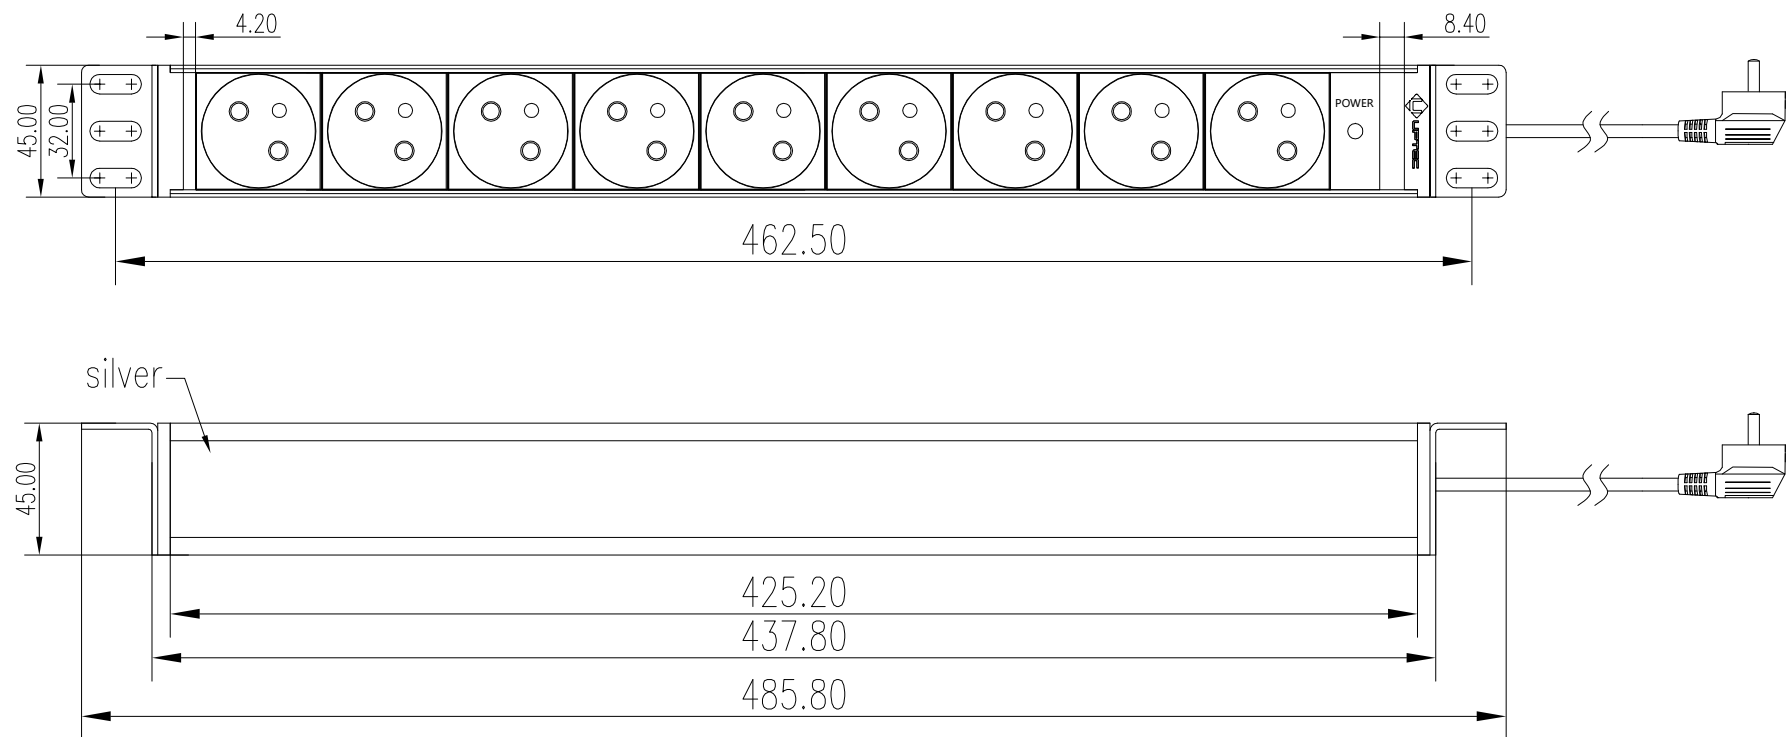

File No	8060258				
Design					
Checked					
Approved					
Modification				Product Name	PDU custom socket
				Customisation Models	
				Proportion:	1:1
				Material:	T15 Aluminum alloy
				Add:	
			Page 1	Tel:	Date: 2023/09/01