
RoHS COMPLIANT

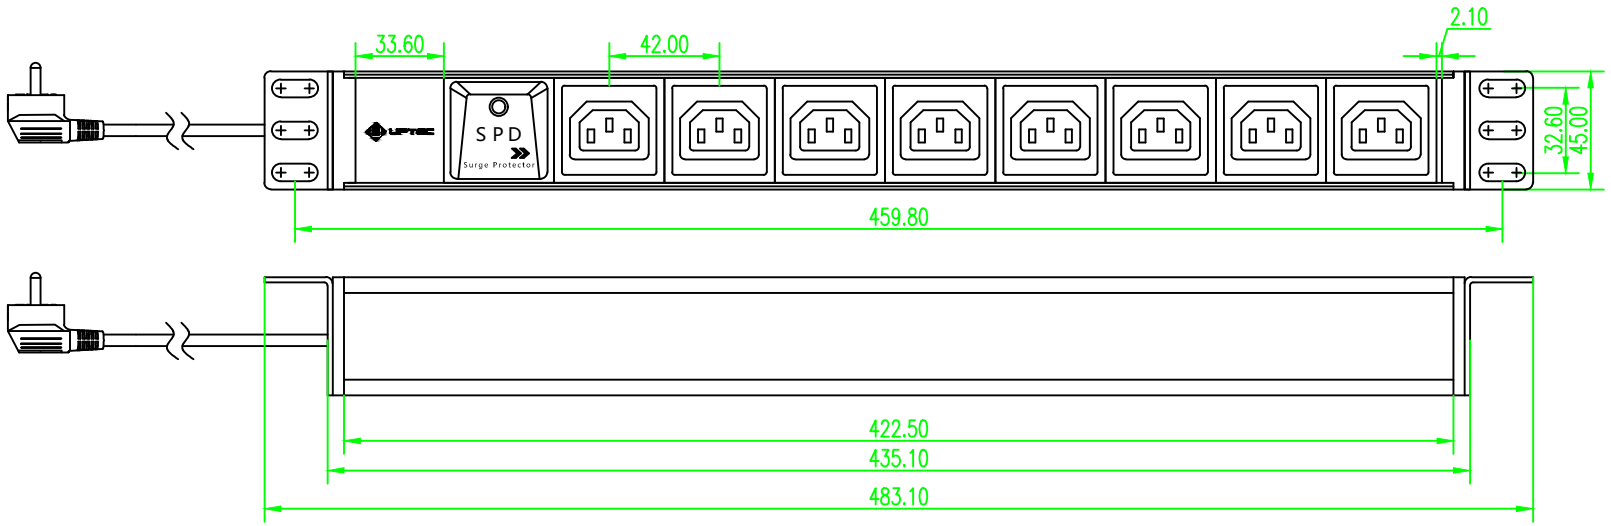

1. Output; 8 IEC C13 + SPD surge protector
2. Input; European 3Pin plug 3G*1.5mm2 2m
3. Internal; 3mm2 copper bar spot welding
4. Carrier; 1U black environmental protection spray T15 aluminum alloy profile
5. Installation: Standard horizontal horizontal installation size PC flame retardant panel + ordinary 360-degree installation board
6. Power; Max Support 4000W 16A 250AC
7. Length of copper bar; Live wire 348, Neutral wire 348, Ground wire 353

File No	2023021501			UPTEC	
Design				Product Name	PDU custom socket
Checked				Customisation Models	8060263
Approved				Proportion: 1:1	Material: T15 Aluminum alloy
Modification				Add:	
			Page 1		Date: 2023/02/15