
RoHS COMPLIANT

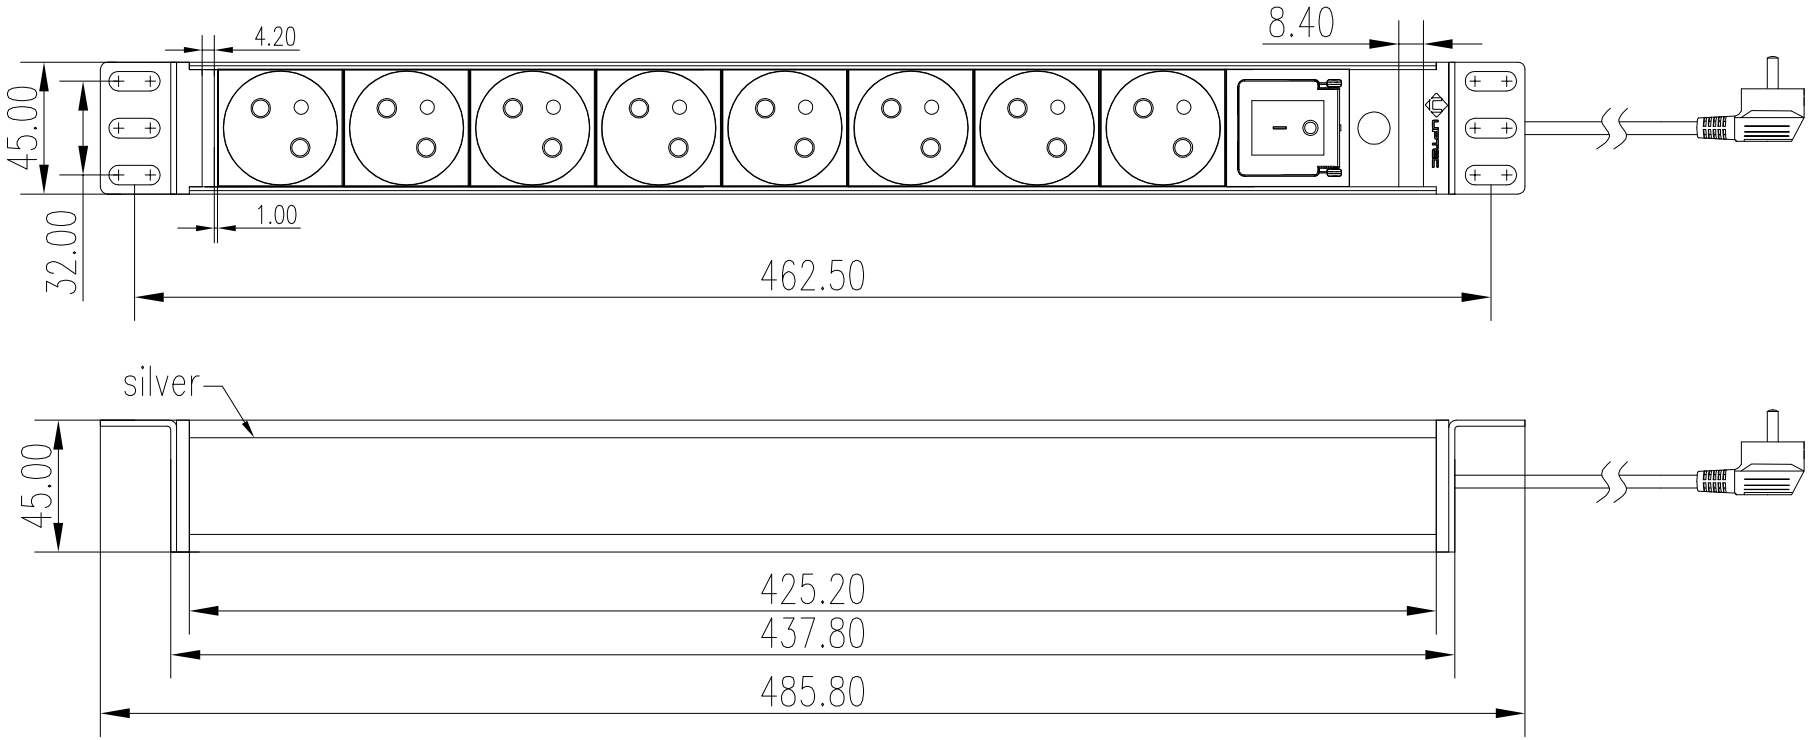

1. Output: 8 French Socket + Overload protection+Double-break switch
2. Input: European 3Pin angled 3G*1.5mm^2 3m
3. Internal; one-piece copper bar
4. Carrier; 1U silver environmental protection spray T15 aluminum alloy profile
5. Installation;non-standard vertical vertical installation size PC flame-retardant panel + ordinary 360-degree installation board
6. Power; Max Support 4000W 16A 250AC

File No	8060290				
Design					
Checked					
Approved					
Modification					
			Page 1	Tel:	Date: 2023/09/01

UPTEC JUST TECHNOLOGY

Product Name	PDU custom socket		
Customisation Models			
Proportion:	1:1	Material:	T15 Aluminum alloy
Add:			