
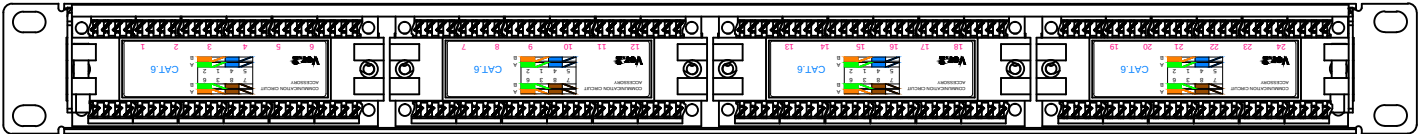
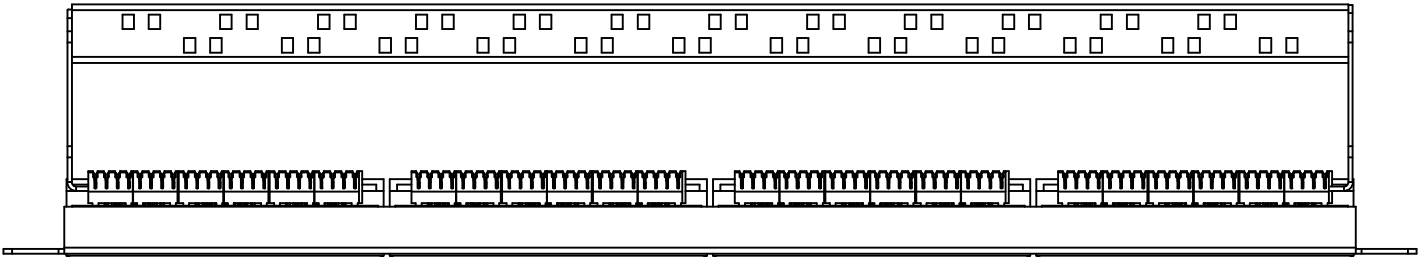


Panneau de brassage noir 19" 1U équipé 24 ports CAT6 UTP

REVISION RECORD

REV	ECO	DESCRIPTION	DRFT	CHKD

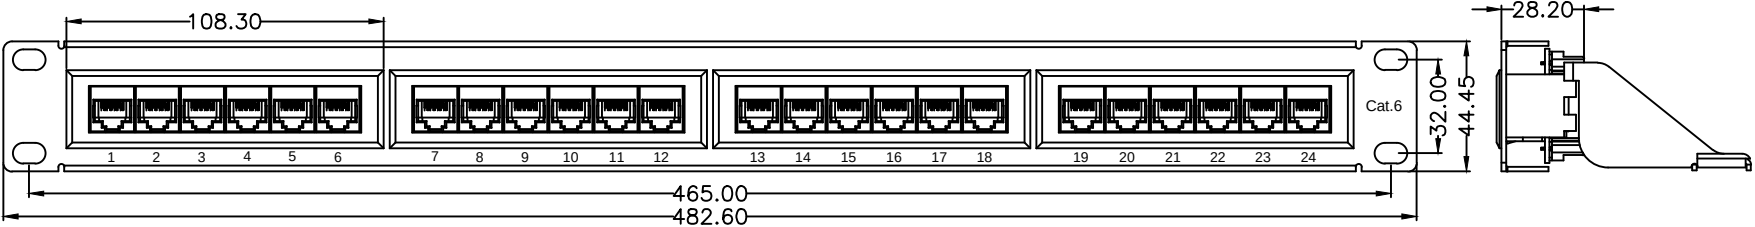

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 20 MILLIOHMS MAX
4. INSULATION RESISTANCE : 100 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz,1MIN
6. C6 PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B.2-1

ENVIRONMENTAL:

1. STORAGE : -40° TO +70°
2. OPERATION: -10° TO +60°

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL:

- 1.HOUSING MATERIAL: PBT
- 2.PANEL FRAME : ST12,POWDER COATING IN BLACK COLOR
- 3.IDC MATERIAL : PC UL94V-0 TERMINAL:PHOSPHOR BRONZE,TIN PLATING
- 4.RJ45 JACK LIFE : 750 TIMES MIN
- 5.IDC LIFE : 200 TIMES MIN
- 6.WIRE : AWG 22~24
- 7.TIA Cat 6 Perm. Link Test: Worst pair NEXT margin≥3.0dB
- 8.Retentiveness of insertion structure: 50N 60±5s

DETACHED LISTS	MM (INCH)		DFTO	QHZ	DATE 2012/12/20
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE
	0.00-20.00	±0.10	MFO		DATE
	20.00-50.00	±0.15	APPVL		DATE
	50.00-100.00	±0.20	REV		DATE
	100.00-angle	±0.25 ±30°	MATERIAL:		
 THIRD ANGLE PROJECTION			PART NO.	8060789	
			DRAWING NO.		

