



Adaptateur DisplayPort 1.4 M vers HDMI 2.0 F - Actif - AWG32 - 0.2m

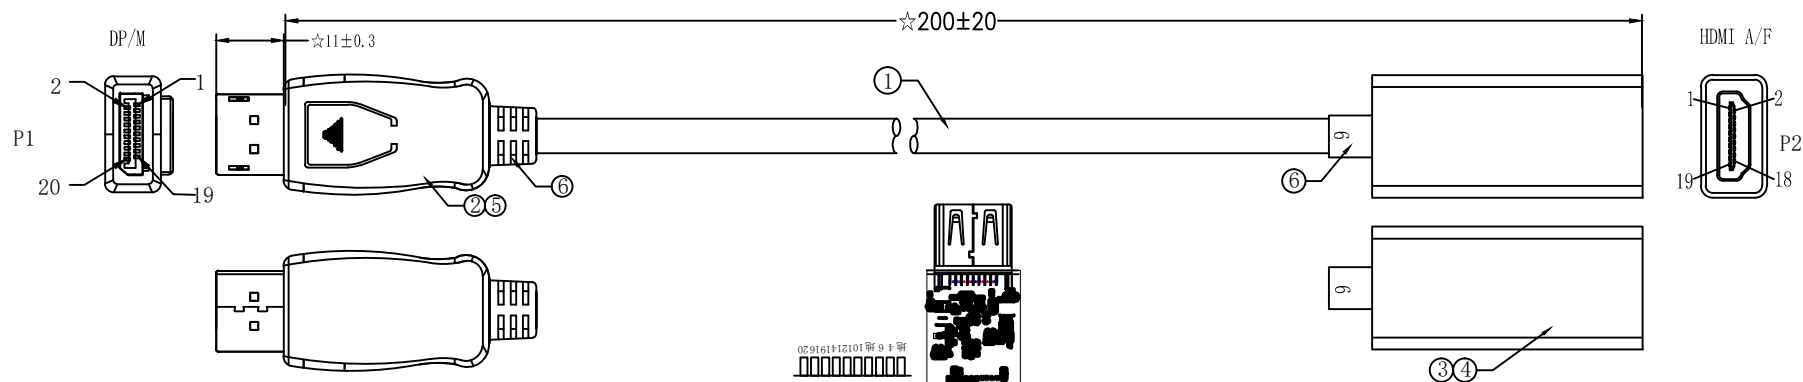


REQUIREMENTS:

- 1:100% Open circuit and short circuit test.
- 2:Insulation resistance:10MΩ(Min)
- 3:Conduction resistance:3Ω(Max)
- 4:Voltage:DC 300V/0.02S
- 5:Use testing:3840x2160@60Hz

☆PS176

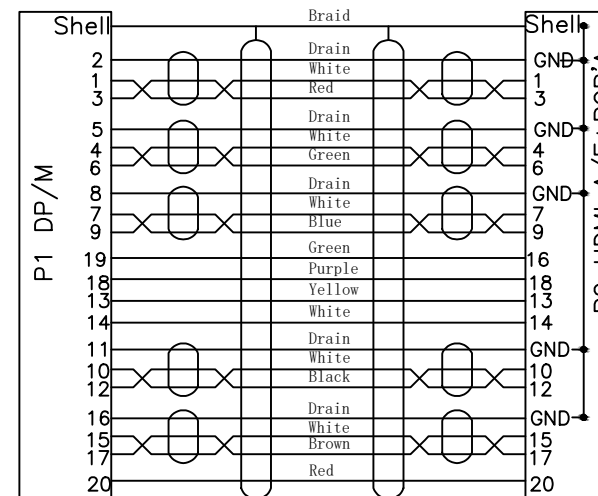

⑥	OUTER MOLD	BLACK 45P PVC		KG
⑤	INNER MOLD	LDPE		KG
④	ABS SHELL	HDMI F Long Type front ABS Shell L45*W21.2mm	1	PCS
③	PCBA	HDMI F PCBA:PS176,Gold Plating G/F,For Shell Nickel Plating,Black Insulation	1	PCS
②	CONNECTOR	DP Male,The Pin Gold Plating G/F",Shell For Ni Plating G/F Black Insulation,Three Pieces Type	2	PCS
①	CABLE	UL20276 #32*5P+#32*5C+AEB PVC Jacket OD:5.0mm	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Item ref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference		
Designed by ACHY	Checked by NIKE	Approved by—date Mar 7th,2020	File name DP M/HDMI F	Date Mar 7th,2020	Scale FREE		
ANGLE: 				DP M/HDMI2.0 F			
UNIT:MM				9990206	Edition 1	Sheet 1/1	