



Cordon DisplayPort 1.4 M vers HDMI 2.0 M - 3m

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

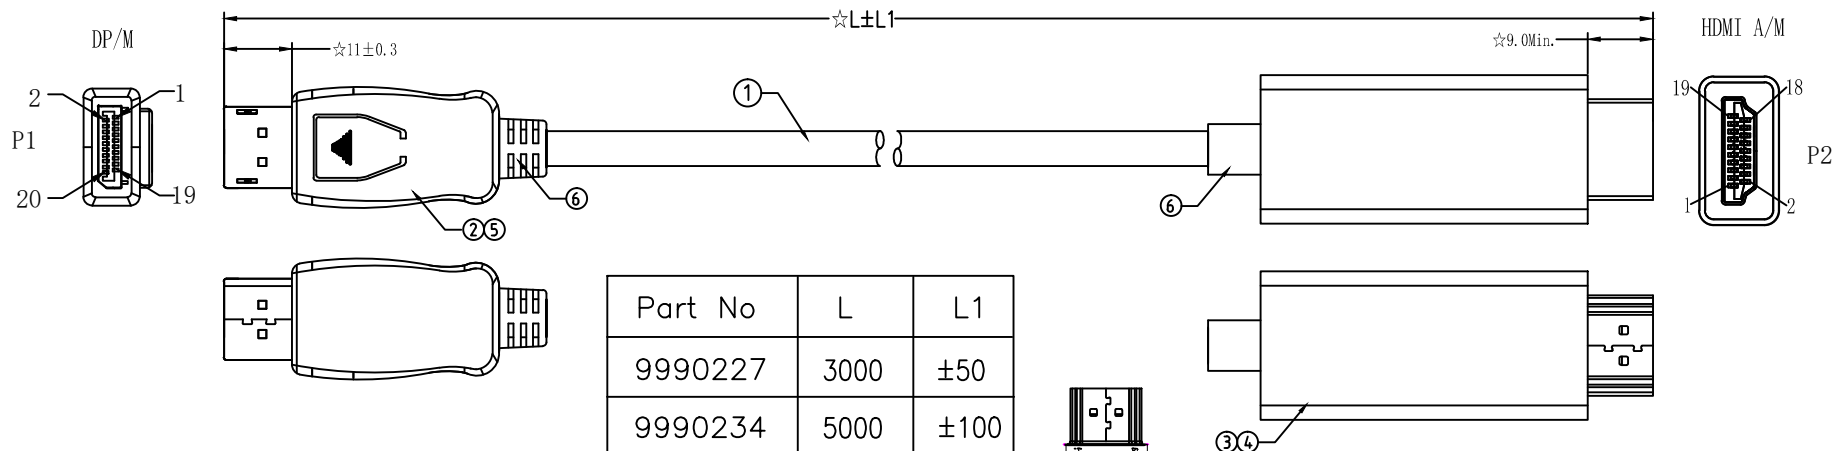


REQUIREMENTS:

- 1:100% Open circuit and short circuit test.
- 2:Insulation resistance:10MΩ(Min)
- 3:Conduction resistance:3Ω(Max)
- 4:Voltage:DC 300V/0.02S
- 5:Use testing:3840x2160@60Hz



☆PS176

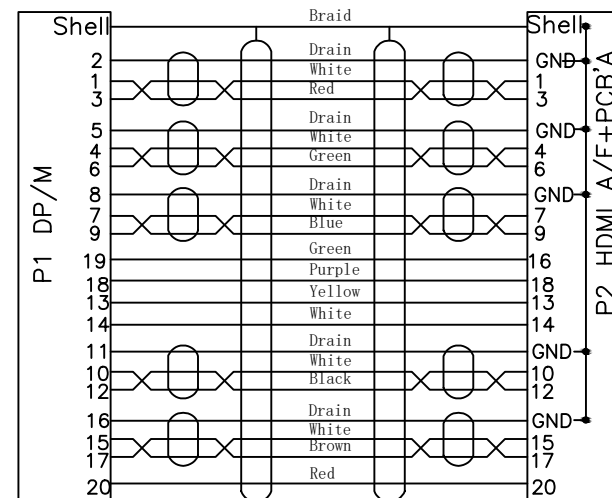

⑥	OUTER MOLD	BLACK 45P PVC		KG
⑤	INNER MOLD	LDPE		KG
④	ABS SHELL	HDMI M Long Type front ABS Shell L45*W21.2mm	1	PCS
③	PCBA	HDMI M PCBA:PS176,Gold Plating G/F,For Shell Gold Plating,Black Insulation	1	PCS
②	CONNECTOR	DP Male,The Pin Gold Plating G/F",Shell For Gold Plating G/F Black Insulation,Three Pieces Type	2	PCS
①	CABLE	UL20276 #30*5P+26AWG*1C+30*4C+AEB PVC Jacket OD:6.0mm	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Item ref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference		
Designed by	ACHY	Checked by	NIKE	Approved by-date	Mar 7th,2020	File name	DP M/HDMI M
ANGLE:		Neklan			DP M/HDMI2.0 M		
UNIT:MM					99902xx	Edition 1	Sheet 1/1