

Cordon DisplayPort 1.4 M vers HDMI 2.0 M - 5m

RevNo	Revision note	Date	Signature	Checked

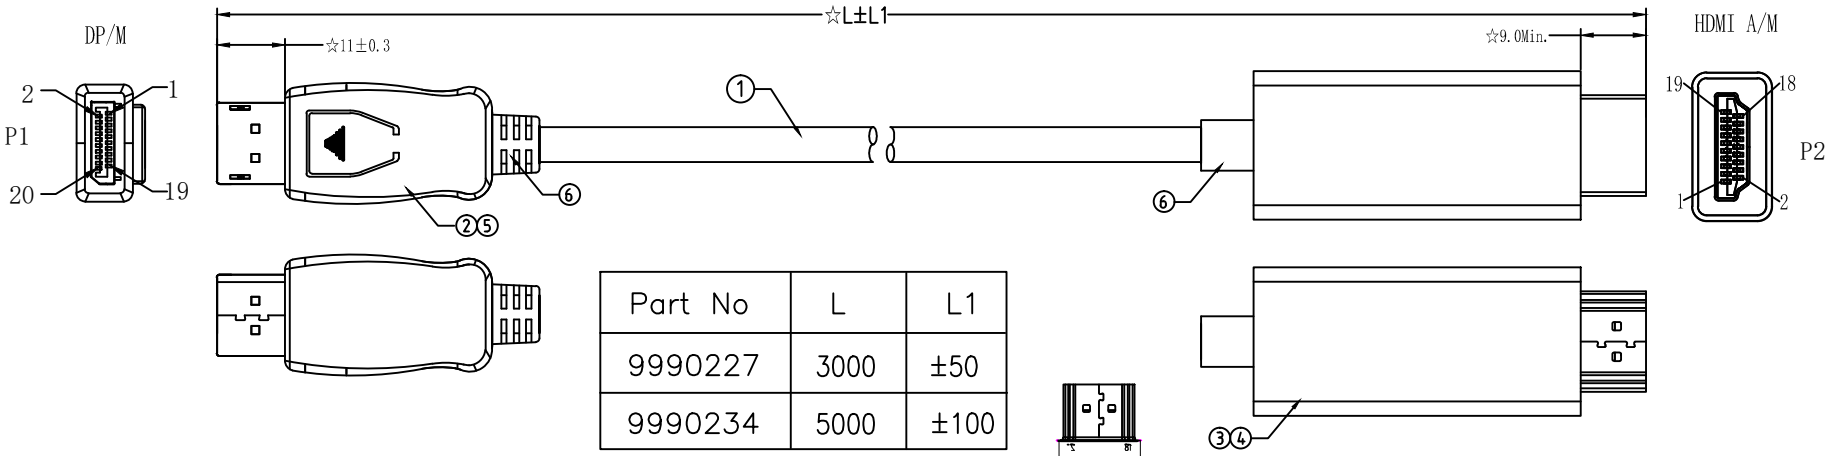


Part No	L	L1
9990227	3000	±50
9990234	5000	±100

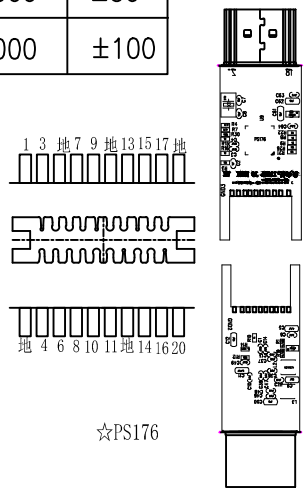

REQUIREMENTS:

1:100% Open circuit and short circuit test.
2:Insulation resistance:10MΩ(Min)
3:Conduction resistance:3Ω(Max)
4:Voltage:DC 300V/0.02S
5:Use testing:3840x2160@60Hz

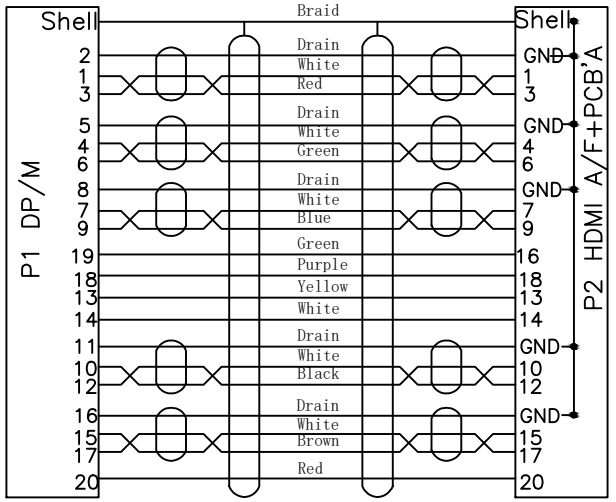

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑥	OUTER MOLD	BLACK 45P PVC		KG
⑤	INNER MOLD	LDPE		KG
④	ABS SHELL	HDMI M Long Type front ABS Shell L45*W21.2mm	1	PCS
③	PCBA	HDMI M PCBA:PS176,Gold Plating G/F,For Shell Gold Plating,Black Insulation	1	PCS
②	CONNECTOR	DP Male,The Pin Gold Plating G/F",Shell For Gold Plating G/F Black Insulation,Three Pieces Type	2	PCS
①	CABLE	UL20276 #30*5P+#26AWG*1C+#30*4C+AEB PVC Jacket OD:6.0mm	L	MM

KG

Item ref	Quantity	Title/Name,designation,material,dimension etc		Article No./Reference
Designed by ACHY	Checked by NIKE	Approved by–date Mar 7th,2020	File name DP M/HDMI M	Date Mar 7th,2020 / Scale FREE
ANGLE:	Neklan Stay connected!	DP M/HDMI2.0 M		
UNIT:MM		99902xx	Edition 1	Sheet 1/1