


Cordon DisplayPort 1.4 M/M noir - AWC30 - 2m


RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

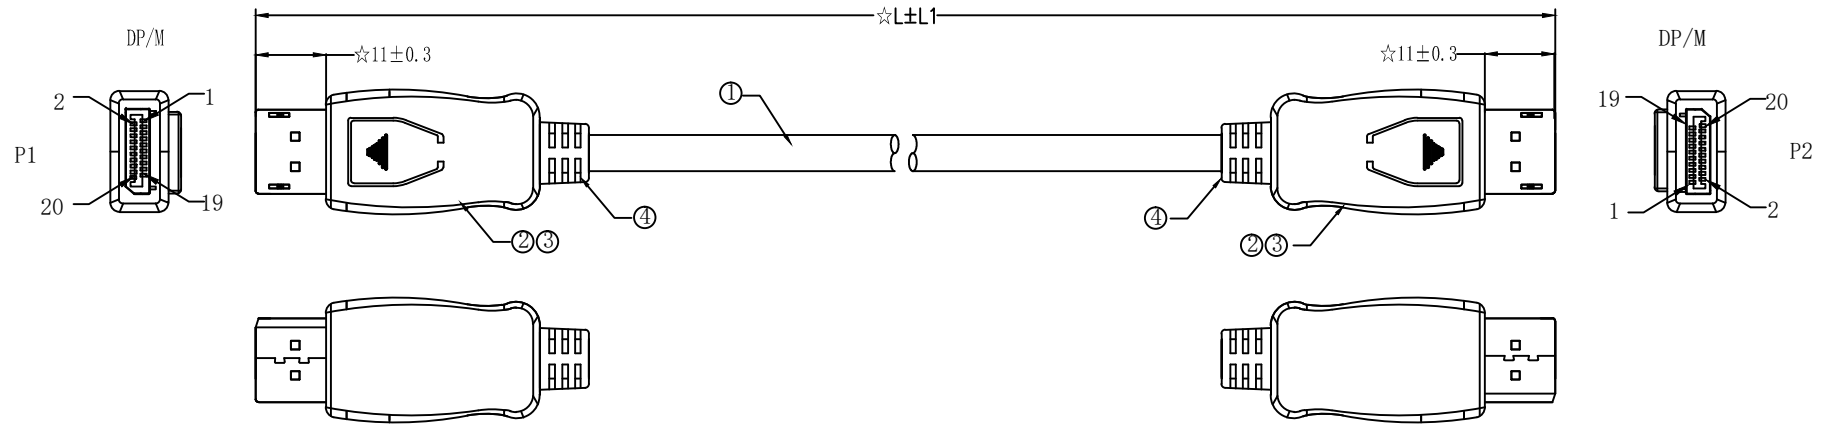


Part No	L	L1
9990241	1000	±20
9990248	2000	±30

REQUIREMENTS:

- 1:100% Open circuit and short circuit test.
- 2:Insulation resistance:10MΩ(Min)
- 3:Conduction resistance:3Ω(Max)
- 4:Voltage:DC 300V/0.02S
- 5:Use testing:7680x4320@60Hz

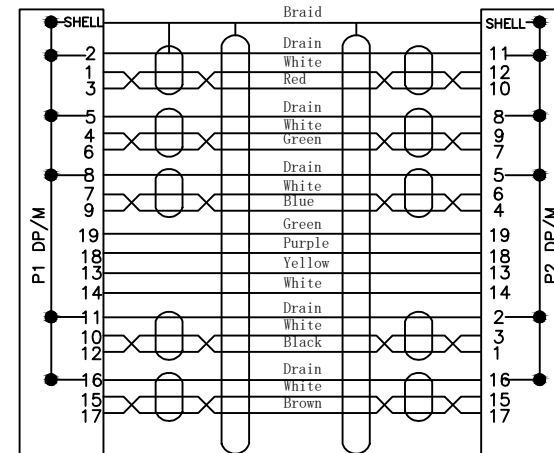

④	OUTER MOLD	BLACK 45P PVC		KG
③	INNER MOLD	LDPE		KG
②	CONNECTOR	DP Male,The Pin Gold Plating 15U",The Shell For Plating G/F Black Insulation,Five Pieces Type	2	PCS
①	CABLE	UL20276 #30*5P+#26*1C+#30*4C+AEB PVC Jacket OD:6.0mm	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Item ref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by ACHY	Checked by NIKE	Approved by-date Mar 7th,2020	File name DP1.4 M/M	Date Mar 7th,2020	Scale FREE	
ANGLE: 	 Stay connected!			DP 1.4 M/M		
UNIT:MM				999024x	Edition 1	Sheet 1/1