
Fiche technique

Drawing

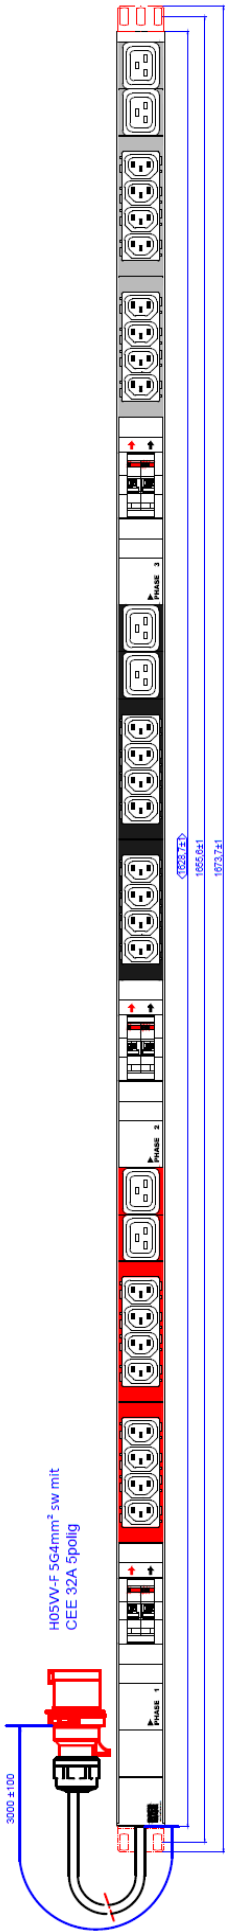

Electrical parameters

Rated current / rated voltage	32A / 400V~
Frequency	50 / 60Hz

Power supply

Supply cable	**3,0m | H05VV-F | 5G4,0mm²**
Colour supply cable	Black
Plug	**CEE 3L+N+PE, 6h (400V/ 32A)**

Power output

Socket outlets

6x IEC60320 C19
2-pole with earthing contact
Black, similar to RAL 9005, 0°
16A 250V~, IP20

24x IEC60320 C13
2-pole with earthing contact
Black, similar to RAL 9005, 0°
10A 250V~,IP20

Protective devices

Circuit breaker (CB)	**2x each phase**
Rated voltage	230V~
Rated current	16A
Tripping characteristic	C
Number of poles	2

Further product attributes

Dimensions	1586x44x47mm
Platform	1 HE
Profile	VM

Material
Housing:
Aluminium, anodized

Cover:
PA6 GF30 850°C

phases color-coded (red, black, grey)

Scope of delivery
1x ALU 1HE VM power strip
2x Mounting brackets

In carton

Environmental conditions

Protection type	IP20