
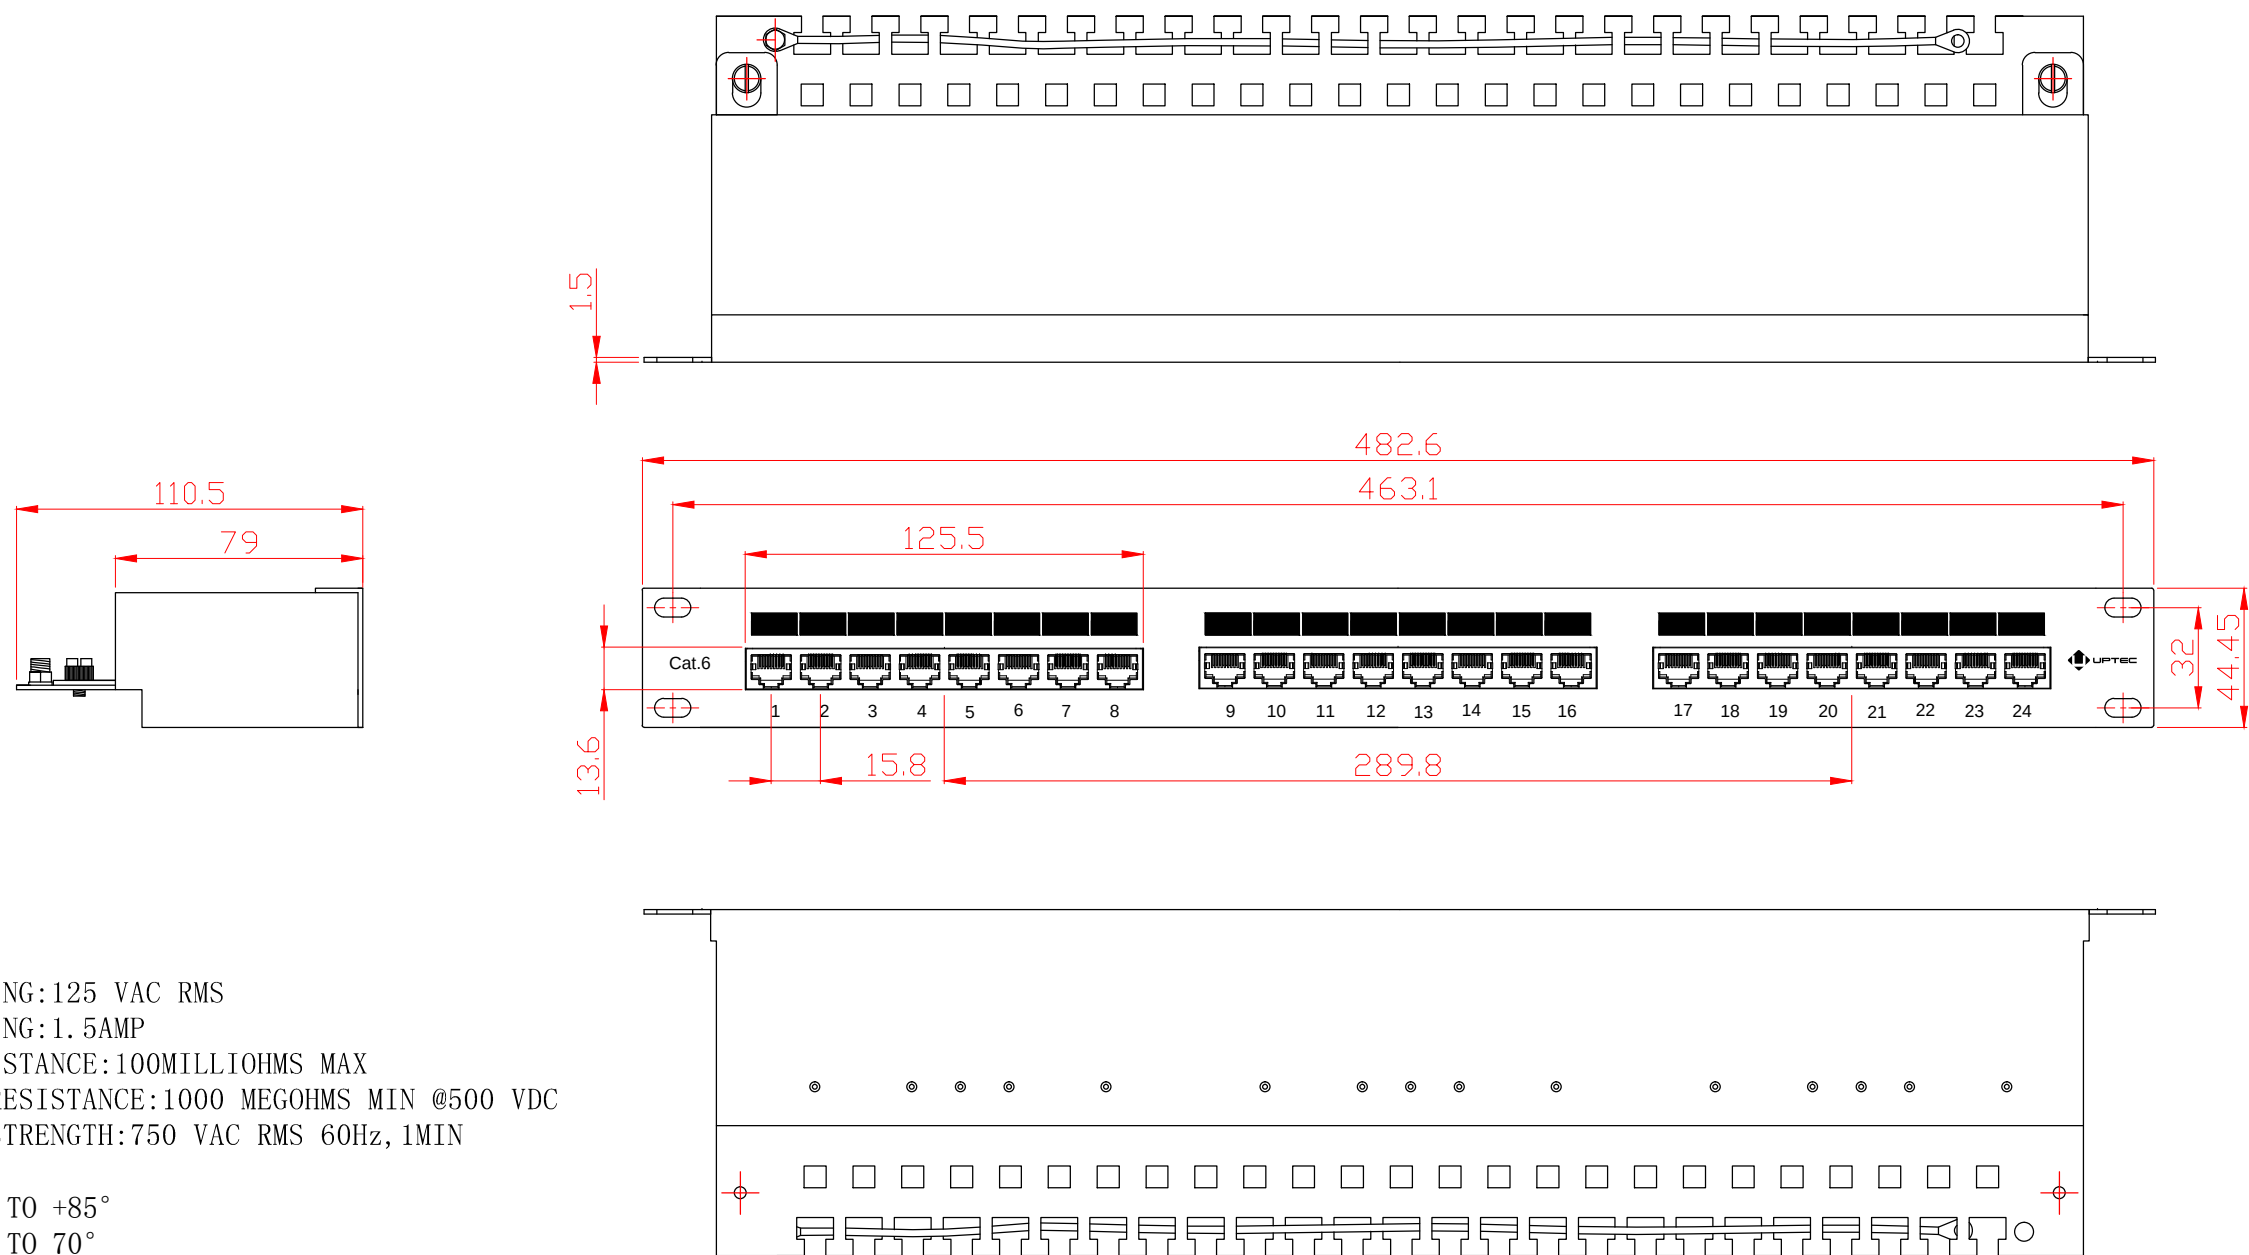


Référence : 8062472 - Désignation : UPTEC - Panneau de brassage noir 19" 1U 24 ports CAT6 FTP



- NOTES:
- ELECTRICAL:
- 1. VOLTAGE RATING:125 VAC RMS
 - 2. CURRENT RATING:1.5AMP
 - 3. CONTACT RESISTANCE:100MILLIOHMS MAX
 - 4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
 - 5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN
- ENVIRONMENTAL:
- 1. STORAGE:-40° TO +85°
 - 2. OPERATION:0° TO 70°
- MECHANICAL:
- 1. HOUSING MATERIAL:PBT;
 - 2. SHIELD MATERIAL: STAINLESS STEEL, T=0.2mm
 - 3. PANEL FRAME:CARBON STEEL, POWDER, COATING IN BLACK COLOR, Spcc1.5mm;
 - 4. PCB MATERIAL:FR-4 T=1.6mm ;
 - 5. IDC MATERIAL:PC , CONTACT:PHOSPHOR BRONZE; WITH NICKEL PATING;
 - 6. RJ45 JACK LIFE:750 TIMES MIN;
 - 7. IDC LIFE:200 TIMES MIN;
 - 8. WIRE:AWG 22-26;

											
					Material					Item No.	8062472
					Angles Projection		Size	Scale	Unit	Part Name	24Ports Cat6 STP Patch Panel
SYM	Number	Bill No. of Alteration	Signature	Date			A4	X:1	mm	ERP	
Drawn	Ding jian bo	2016. 1. 13	Tolerance							Part No.	
Checked	Ge pei jun	2016. 1. 13	0. 00-20. 00 ±0. 10 20. 00-50. 00 ±0. 15 50. 00-100. 00 ±0. 20 100. 00-Angle ±0. 25 ±30'								
Approved	Wang wei jun	2016. 1. 13			Sheet	1 OF 1	Version: A/0			Part No.	