
RevNo	Revision note	Date	Signature	Checked


Cordon Mini-DisplayPort 1.4 M vers DP 1.4 M - AWG30 - 2m

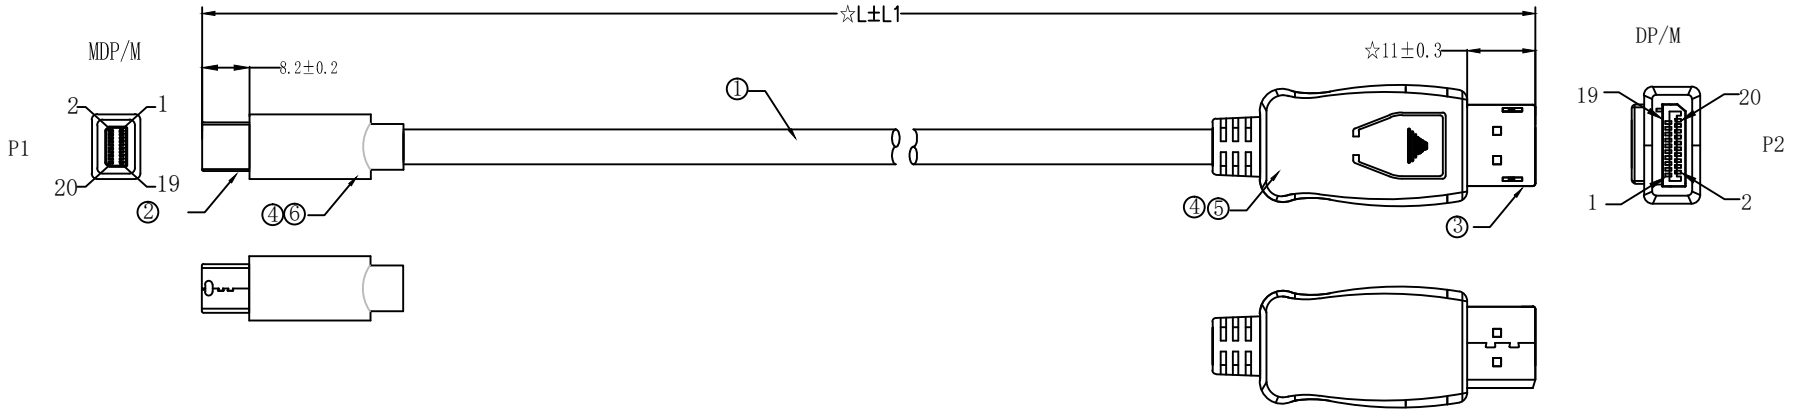

Part No	L	L1
9990192	1000	±20
9990199	2000	±30

REQUIREMENTS:

1:100% Open circuit and short circuit test.
2:Insulation resistance:10MΩ(Min)
3:Conduction resistance:3Ω(Max)
4:Voltage:DC 300V/0.02S
5:Use testing:7680x4320@60Hz

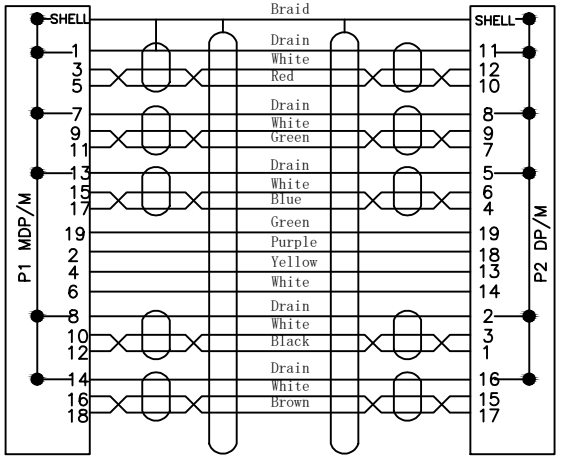

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑥	SHELL	MDP ABS SHELL	1	PCS
⑤	SHELL	DP ABS SHELL	2	PCS
④	INNER MOLD	LDPE		KG
③	CONNECTOR	DP Male,The Pin Gold Plating 15U",The Shell For Plating G/F Black Insulation,Five Pieces Type	1	PCS
②	CONNECTOR	MDP Male,The Pin Gold Plating 15U",The Shell For Plating G/F White Insulation	1	PCS
①	CABLE	UL20276 #30*5P+#26*1C+#30*4C+AEB PVC Jacket OD:6.0mm	L	MM

Item ref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference
Designed by ACHY		Checked by NIKE	Approved by—date Mar 7th,2020	File name MDP/DP1.4 M/M	Date Mar 7th,2020	Scale FREE
ANGLE:		Neklan Stay connected!		MDP/DP 1.4 M/M		
UNIT:MM				999019x	Edition 1	Sheet 1/1

KG